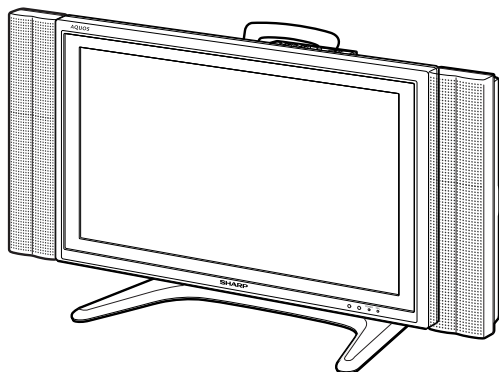


SHARP**SERVICE MANUAL****LCD COLOR TELEVISION****LC-26GA5U**
LC-32GA5U**MODELS**

In the interests of user-safety (Required by safety regulations in some countries) the set should be re-stored to its original condition and only parts identical to those specified should be used.

CONTENTS


	Page
• IMPORTANT SERVICE SAFETY PRECAUTION	2
• SPECIFICATIONS	5
• OPERATION MANUAL	6
• DIMENSIONS	13
• REMOVING OF MAJOR PARTS	15
• ADJUSTMENT PROCEDURE	20
• TROUBLESHOOTING TABLE	38
• OVERALL WIRING DIAGRAM/CHASSIS LAYOUT	48
• SYSTEM BLOCK DIAGRAM	50
• CPU BLOCK DIAGRAM	52
• PRINTED WIRING BOARD ASSEMBLIES	54
• PARTS LIST	91
• PACKING OF THE SET	129

IMPORTANT SERVICE SAFETY PRECAUTION

- Service work should be performed only by qualified service technicians who are thoroughly familiar with all safety checks and the servicing guidelines which follow:

WARNING

1. For continued safety, no modification of any circuit should be attempted.
2. Disconnect AC power before servicing.

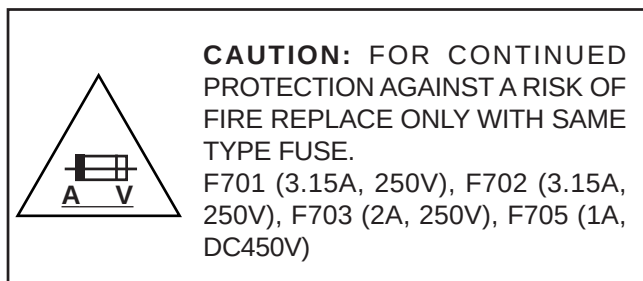

BEFORE RETURNING THE RECEIVER (Fire & Shock Hazard)


Before returning the receiver to the user, perform the following safety checks:

1. Inspect all lead dress to make certain that leads are not pinched, and check that hardware is not lodged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulation materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacitor networks, mechanical insulators, etc.
3. To be sure that no shock hazard exists, check for leakage current in the following manner.
 - Plug the AC cord directly into a 120volt AC outlet.
 - Using two clip leads, connect a 1.5k ohm, 10 watt resistor paralleled by a 0.15μF capacitor in series with all exposed metal cabinet parts and a known earth ground, such as electrical conduit or electrical ground connected to an earth ground.

- Use an AC voltmeter having with 5000 ohm per volt, or higher, sensitivity or measure the AC voltage drop across the resistor.
- Connect the resistor connection to all exposed metal parts having a return to the chassis (antenna, metal cabinet, screw heads, knobs and control shafts, escutcheon, etc.) and measure the AC voltage drop across the resistor.

All checks must be repeated with the AC cord plug connection reversed. (If necessary, a nonpolarized adaptor plug must be used only for the purpose of completing these checks.)

Any reading of 0.75 Vrms (this corresponds to 0.5 mA rms AC.) or more is excessive and indicates a potential shock hazard which must be corrected before returning the monitor to the owner.

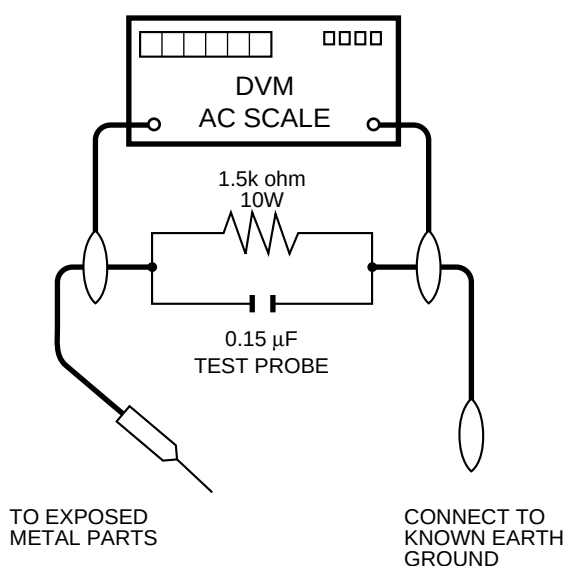

SAFETY NOTICE

Many electrical and mechanical parts in LCD color television have special safety-related characteristics. These characteristics are often not evident from visual inspection, nor can protection afforded by them be necessarily increased by using replacement components rated for higher voltage, wattage, etc.

Replacement parts which have these special safety characteristics are identified in this manual; electrical components having such features are identified by "

⚠" and shaded areas in the **Replacement Parts List** and **Schematic Diagrams**.

For continued protection, replacement parts must be identical to those used in the original circuit.

The use of a substitute replacement parts which do not have the same safety characteristics as the factory recommended replacement parts shown in this service manual, may create shock, fire or other hazards.

PRECAUTIONS A PRENDRE LORS DE LA REPARATION

- Ne peut effectuer la réparation qu' un technicien spécialisé qui s'est parfaitement accoutumé à toute vérification de sécurité et aux conseils suivants.

AVERTISSEMENT

1. N'entreprendre aucune modification de tout circuit. C'est dangereux.
2. Débrancher le récepteur avant toute réparation.



VERIFICATIONS CONTRE L'INCEN-DIE ET LE CHOC ELECTRIQUE


Avant de rendre le récepteur à l'utilisateur, effectuer les vérifications suivantes.

1. Inspecter tous les faisceaux de câbles pour s'assurer que les fils ne soient pas pincés ou qu'un outil ne soit pas placé entre le châssis et les autres pièces métalliques du récepteur.
2. Inspecter tous les dispositifs de protection comme les boutons de commande non-métalliques, les isolants, le dos du coffret, les couvercles ou blindages de réglage et de compartiment, les réseaux de résistance-capacité, les isolateurs mécaniques, etc.
3. S'assurer qu'il n'y ait pas de danger d'électrocution en vérifiant la fuite de courant, de la façon suivante:
 - Brancher le cordon d'alimentation directement à une prise de courant de 120V. (Ne pas utiliser de transformateur d'isolation pour cet essai).
 - A l'aide de deux fils à pinces, brancher une résistance de 1.5 k Ω 10 watts en parallèle avec un condensateur

de 0.15 μ F en série avec toutes les pièces métalliques exposées du coffret et une terre connue comme une conduite électrique ou une prise de terre branchée à la terre.

- Utiliser un voltmètre CA d'une sensibilité d'au moins 5000 Ω /V pour mesurer la chute de tension en travers de la résistance.
- Toucher avec la sonde d'essai les pièces métalliques exposées qui présentent une voie de retour au châssis (antenne, coffret métallique, tête des vis, arbres de commande et des boutons, écusson, etc.) et mesurer la chute de tension CA en-travers de la résistance. Toutes les vérifications doivent être refaites après avoir inversé la fiche du cordon d'alimentation. (Si nécessaire, une prise d'adpatation non polarisée peut être utilisée dans le but de terminer ces vérifications.) Tous les courants mesurés ne doivent pas dépasser 0.5 mA.

Dans le cas contraire, il y a une possibilité de choc électrique qui doit être supprimée avant de rendre le récepteur au client.

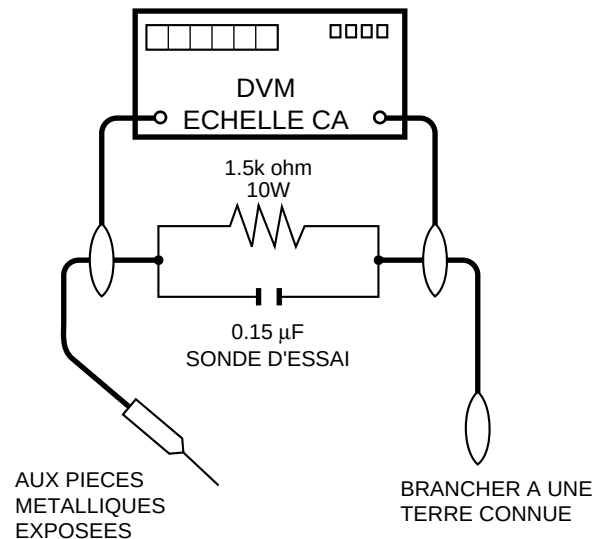

AVIS POUR LA SECURITE

De nombreuses pièces, électriques et mécaniques, dans les téléviseur ACL présentent des caractéristiques spéciales relatives à la sécurité, qui ne sont souvent pas évidentes à vue. Le degré de protection ne peut pas être nécessairement augmentée en utilisant des pièces de remplacement étalonnées pour haute tension, puissance, etc.

Les pièces de remplacement qui présentent ces caractéristiques sont identifiées dans ce manuel; les pièces électriques qui présentent ces particularités sont

identifiées par la marque " $\triangle$ " et hachurées dans la liste des pièces de remplacement et les diagrammes schématiques.


Pour assurer la protection, ces pièces doivent être identiques à celles utilisées dans le circuit d'origine. L'utilisation de pièces qui n'ont pas les mêmes caractéristiques que les pièces recommandées par l'usine, indiquées dans ce manuel, peut provoquer des électrocutions, incendies, radiations X ou autres accidents.

Precautions for using lead-free solder

1 Employing lead-free solder

"PWBs" of this model employs lead-free solder. The LF symbol indicates lead-free solder, and is attached on the PWBs and service manuals. The alphabetical character following LF shows the type of lead-free solder.

Example:

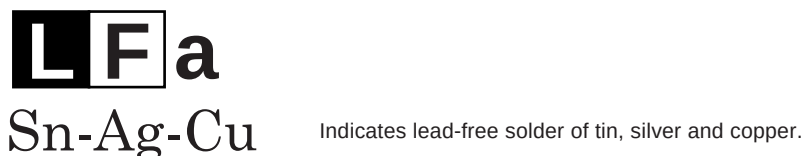

2 Using lead-free wire solder

When fixing the PWB soldered with the lead-free solder, apply lead-free wire solder. Repairing with conventional lead wire solder may cause damage or accident due to cracks.

As the melting point of lead-free solder (Sn-Ag-Cu) is higher than the lead wire solder by 40°C, we recommend you to use a dedicated soldering bit, if you are not familiar with how to obtain lead-free wire solder or soldering bit, contact our service station or service branch in your area.

3 Soldering

As the melting point of lead-free solder (Sn-Ag-Cu) is about 220°C which is higher than the conventional lead solder by 40°C, and as it has poor solder wettability, you may be apt to keep the soldering bit in contact with the PWB for extended period of time. However, Since the land may be peeled off or the maximum heat-resistance temperature of parts may be exceeded, remove the bit from the PWB as soon as you confirm the steady soldering condition.

Lead-free solder contains more tin, and the end of the soldering bit may be easily corroded. Make sure to turn on and off the power of the bit as required.

If a different type of solder stays on the tip of the soldering bit, it is alloyed with lead-free solder. Clean the bit after every use of it.

When the tip of the soldering bit is blackened during use, file it with steel wool or fine sandpaper.

Be careful when replacing parts with polarity indication on the PWB silk.


Lead-free wire solder for servicing

Part No,	★	Description	Code
ZHNDai123250E	J	φ0.3mm 250g(1roll)	BL
ZHNDai126500E	J	φ0.6mm 500g(1roll)	BK
ZHNDai12801KE	J	φ1.0mm 1kg(1roll)	BM

SPECIFICATIONS


Item			26" LIQUID CRYSTAL TELEVISION, Model: LC-26GA5U	32" LIQUID CRYSTAL TELEVISION, Model: LC-32GA5U
LCD panel			26" Advanced Super View & BLACK TFT LCD	32" Advanced Super View & BLACK TFT LCD
Number of dots			3,147,264 dots (1366 × 768 × 3 dots)	
TV Function	TV-standard (CCIR)		American TV Standard NTSC System	
	Receiving Channel	VHF/UHF	VHF 2-13ch, UHF 14-69ch	
		CATV	1-125ch	
	Audio multiplex		BTSC System	
Brightness			450 cd/m ²	
Backlight			60,000 hours (at Backlight Standard position)	
Viewing angles			H : 170° V : 170°	
Audio amplifier			10W × 2	
Speakers			Ø 8cm 2pcs, Ø 2.5cm 2pcs	
Terminals	Rear	INPUT 1	AV in, COMPONENT in	
		INPUT 2	AV in, COMPONENT in	
		INPUT 3	S-VIDEO in, AV in	
		INPUT 4	HDMI in	
		INPUT 5	DVI-I in, Audio in	
		ANTENNA	75 Ω Unbalance, F Type for VHF/UHF/CATV in × 1	
		MONITOR OUTPUT	S-VIDEO out, AV out	
OSD language			English/French/Spanish	
Power Requirement			AC 120 V, 60 Hz (FOR NORTH AMERICA) AC 110-240 V, 50/60 Hz(FOR OTHERS)	
Power Consumption			116 W (0.3 W Standby with AC 120 V)	140 W (0.3 W Standby with AC 120 V)
Weight			28 lbs./12.7 kg (w/o stand), 35.1 lbs./15.9 kg (with stand)	36.4 lbs./16.5 kg (w/o stand), 45.2 lbs./20.5 kg (with stand)
Accessories			Operation manual (× 1), Remote control unit (× 1), AC cord (× 1), “AAA” size battery (× 2), Cable clamp (× 1), Cable tie (× 1)	

Specifications are subject to change without prior notice.

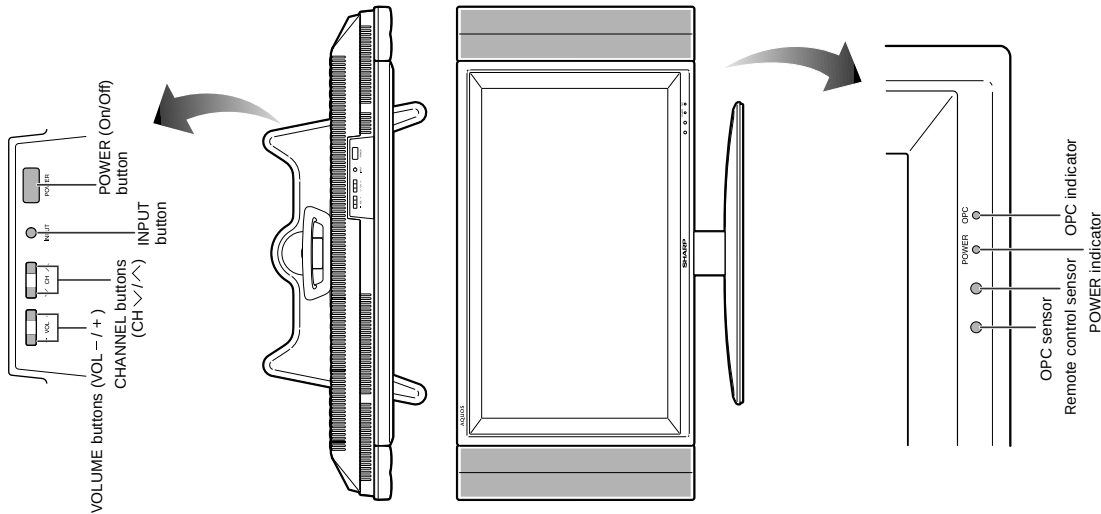

*OPC: Optical Picture Control

OPERATION MANUAL

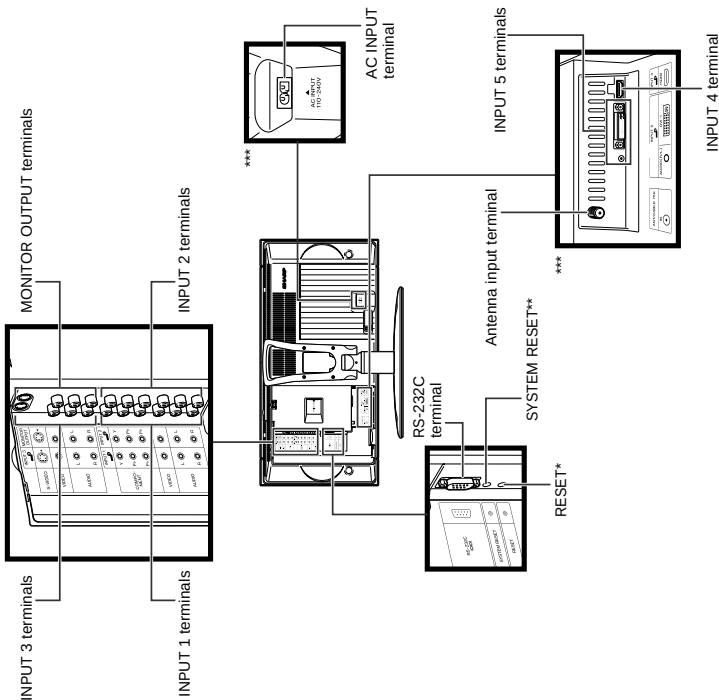

* Press **RESET** if the TV cannot return to its original state after performing various operations.

- AV MODE resets to DYNAMIC (Fixed)
- TV channel returns to initial channel setting (Air: 2ch, Cable:1 or 2ch)
- Audio setting initializes
- Dolby virtual resets to Off
- Image position initializes

** Press **SYSTEM RESET** if the TV does not operate after starting up.



NOTE

- Pressing **RESET** will not work if the TV is in standby mode.
- Pressing **RESET** will not delete channel preset or secret number. See page for clearing the secret number when you know it. See page for initializing to the factory preset values when you forget your secret number.

*** Angle seen from below.

Part names

Remote control unit

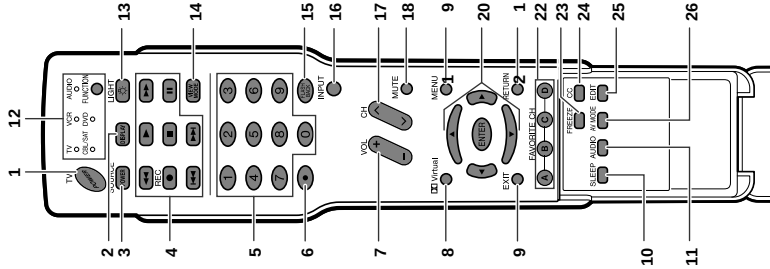

NOTE


- When using the remote control unit, point it at the TV.

Using external equipment


- TV POWER:** Switch the TV power on or standby.
- DISPLAY:** Display the channel information.
- SOURCE POWER:** Turns the power of the external equipment on and off.
- External equipment operational buttons:** Operate the external equipment.
- 0-9: Set the channel.
- (DOT)
- VOL +/- :** Set the volume.
- Virtual:** Select Virtual Dolby Surround settings. (See page 17.)
- EXIT:** Turn off the menu screen.
- SLEEP:** Set the sleep timer.
- AUDIO:** Select the MTS/SAP.
- FUNCTION:** Switches the remote control for TV, CBL/SAT, VCR, DVD and AUDIO operation. Indicator lights up for the current mode.
- When pressed all buttons on the remote control unit will light. The lighting will turn off if no operations are performed within about 5 seconds. This button is used for performing operations in dark places.**
- VIEW MODE:** Select the screen size.
- FLASHBACK:** Return to the previous channel or input external mode.
- INPUT:** Select a TV input source. (TV, INPUT 1, INPUT 2, INPUT 3, INPUT 4, INPUT 5)
- CH ^ / v :** Select the channel.
- MUTE:** Mute the sound.
- MENU:** Display the menu screen.
- ENTER:** Select a desired item on the screen.
- RETURN:** Return to the previous menu screen.
- FAVORITE CH A, B, C, D:** Select four preset favorite channels in four different categories.
While watching, you can toggle the selected channels by pressing A, B, C and D.
- FREEZE:** Set the still image. Press again to return to normal screen.
- CC:** Display captions during closed-caption source.
- EDIT:** Register favorite channel.
- AV MODE:** Select an audio or video setting.
(AV mode: STANDARD, MOVIE, GAME, USER, DYNAMIC (Fixed), DYNAMIC, PC mode: STANDARD, USER.)

Displaying an external equipment image

Explanation here is for the setting when connecting DVD to INPUT1 terminal.



To watch a DVD image, select "INPUT1" from "INPUT SOURCE" menu using **INPUT** on the remote control unit or on the TV.




NOTE

- If the image does not come in clearly, you may need to change the input signal type setting on the "Input Select" menu.

Selecting the INPUT signal

- Press **MENU** and the MENU screen displays.
- Press **Left/Right** to select "Option".
- Press **Up/Down** to select "Input Select", and then press **ENTER**.
- Select the desired signal type.

For INPUT1 signal



The setting is stored and can be selected on the "INPUT SOURCE" menu.

CAUTION

- To protect all equipment, always turn off the TV before connecting to a DVD player, VCR, Digital TV tuner, PC, HDMI equipment, game console, camcorder or other external equipment.

NOTE


- See pages for external equipment connection.
- Please refer to the relevant operation manual (DVD player, PC, etc.) carefully before making connections.
- Each time **INPUT** is pressed, the input source toggles.
- Refer to your external equipment operation manual for the signal type.

Using external equipment


Connecting a DVD player

You can use the INPUT 1 to INPUT 5 terminals when connecting to a DVD player and other audiovisual equipment.


When using component cable. (INPUT 1 or 2)

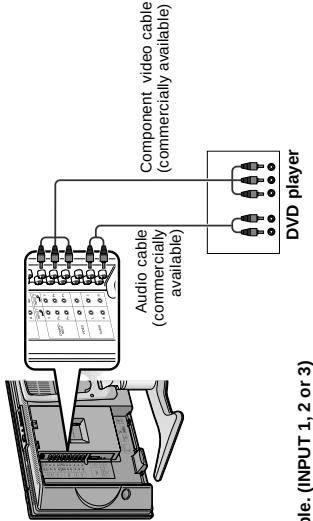

When using composite cable. (INPUT 1, 2 or 3)

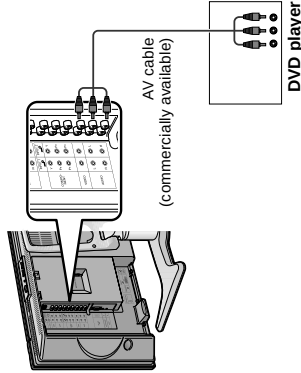

When using DVI cable. (INPUT 5)

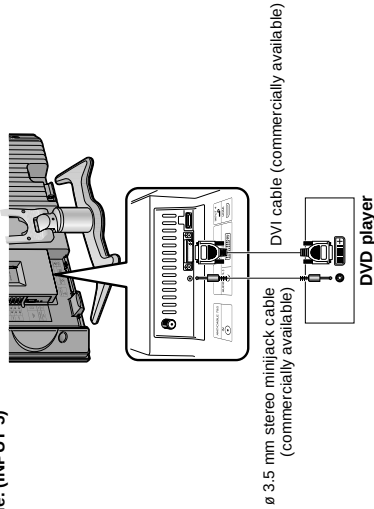


Connecting a VCR, game console or camcorder

A VCR, game console, camcorder and some other audiovisual equipment are conveniently connected using the INPUT 1 to 3 terminals.

NOTE

- The S-video terminal has priority over the video terminals. (INPUT 3 only)

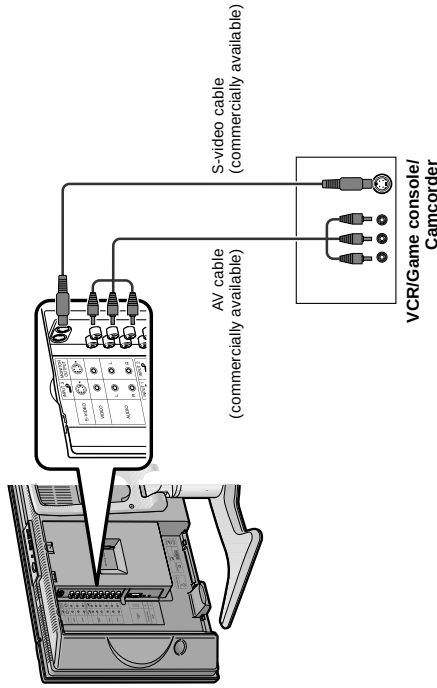


Using external equipment


Connecting a Digital TV STB

You can use the INPUT 1 to INPUT 5 terminals when connecting a Digital TV STB and other audiovisual equipment.


When using component cable. (INPUT 1 or 2)

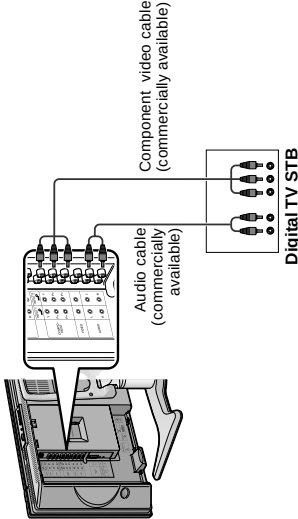

When using composite cable. (INPUT 1, 2 or 3)

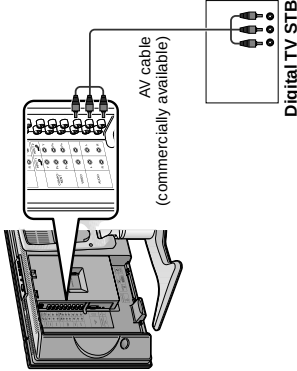


When using DVI cable. (INPUT 5)

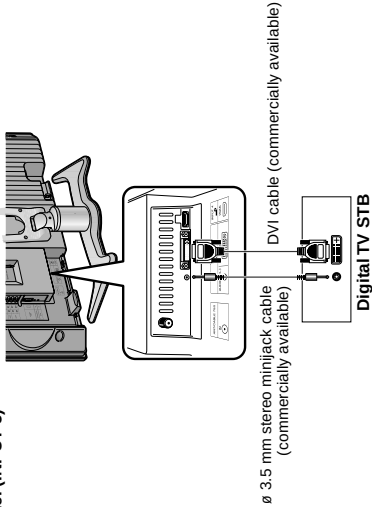

Connecting HDMI equipment


You can use the INPUT 4 terminal when connecting an HDMI equipment.

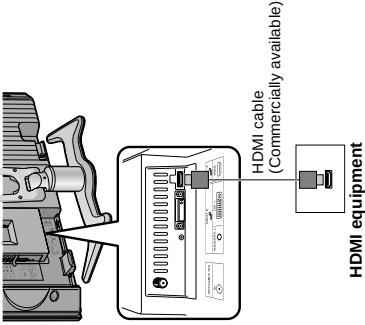

Displaying an image from HDMI equipment

1

To watch an HDMI equipment image, select "INPUT4" from "INPUT SOURCE" menu using INPUT on the remote control unit or on the TV.



5

Press ▲/▼ to select the desired item and press ENTER.

6

Press ▲/▼/◀/▶ to select the desired setting and press ENTER.

HDMI Setup Items	Selectable items	Description
Signal Type	Auto/RGB/CbCr 4:4:4/CbCr 4:2:2	Select the signal type from an HDMI terminal. Unless the image quality looks obviously poor, select Auto.
Color Matrix	Auto/ITU601/ITU709	Select the internal color space conversion method when an RGB signal is input. Normally, select Auto.
Dynamic Range	Standard/Out of standard	Select the signal amplitude range. Normally, select Standard.
Auto View	Enable/Disable	Set whether or not to use VIEW MODE based on signal recognition, including an HDMI signal.

NOTE

• Refer to your external equipment operation manual for the signal type.

2


Press MENU and the MENU screen displays.

3

Press ◀/▶ to select "Option".

4



Press ▲/▼ to select "HDMI Setup", and then press ENTER.



Using external equipment

Connecting a PC

Use the INPUT 5 terminal to connect a PC.

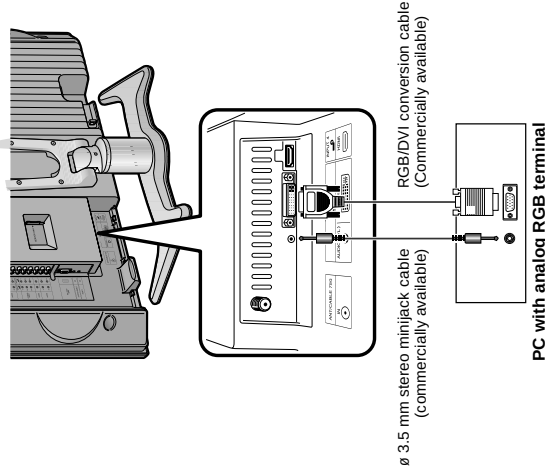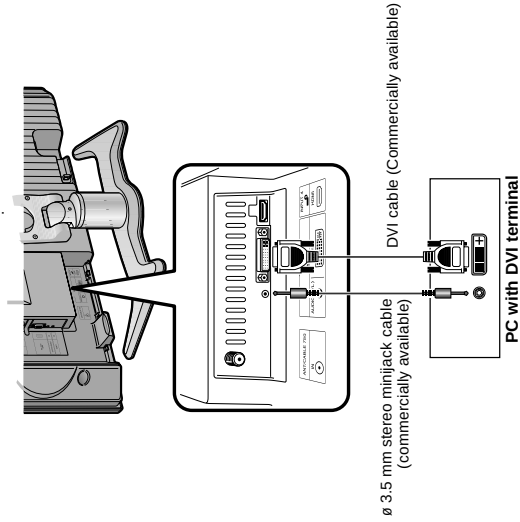

Appendix

Removing the stand


Before detaching (or attaching) stand, unplug the AC cord from the AC INPUT terminal.



• Do not remove the stand from the TV unless using an optional wall mount bracket to mount it.

Before attaching/detaching stand

- Before performing work make sure to turn off the TV.
- Before performing work spread cushioning over the base area to lay the TV on. This will prevent it from being damaged.

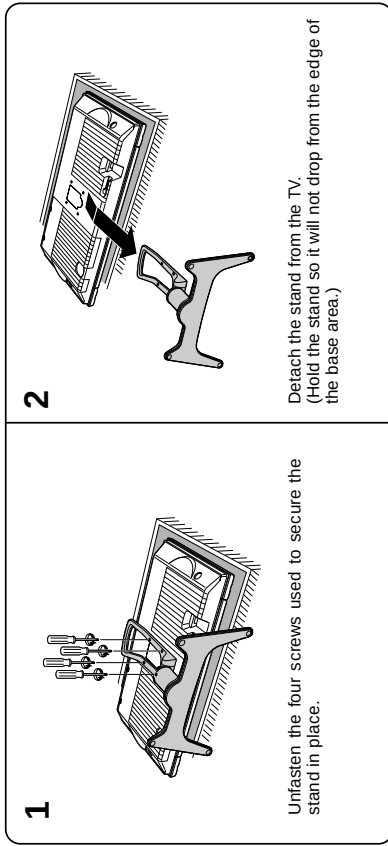

To attach the stand, perform the above steps in reverse order.


Setting the TV on the wall



- Installing the TV requires special skill that should only be performed by qualified service personnel. Customers should not attempt to do the work themselves. SHARP bears no responsibility for improper mounting or mounting that results in accident or injury.

Using an optional bracket to mount the TV

- You can ask a qualified service personnel about using an optional bracket to mount the TV to the wall.
- Carefully read the instructions that come with the bracket before beginning work.

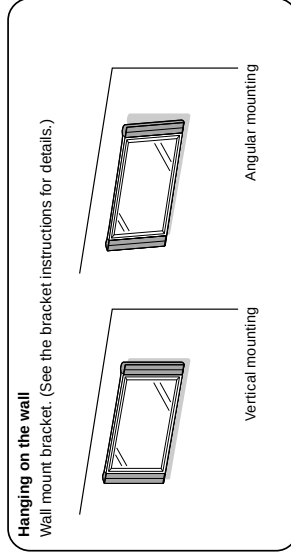

Appendix

PC compatibility chart

PC/MAC	Resolution	Horizontal Frequency	Vertical Frequency	VESA Standard
PC	VGA	640 x 400	31.5 kHz	60 Hz
			37.9 kHz	85 Hz
		720 x 400	31.5 kHz	60 Hz
			37.9 kHz	85 Hz
			31.5 kHz	60 Hz
	WXGA	640 x 480	37.5 kHz	72 Hz
			43.3 kHz	85 Hz
			31.5 kHz	60 Hz
			37.9 kHz	85 Hz
			31.5 kHz	60 Hz
MAC	VGA	848 x 480	31.5 kHz	60 Hz
			35.1 kHz	56 Hz
			37.9 kHz	60 Hz
		800 x 600	48.1 kHz	72 Hz
			46.9 kHz	75 Hz
	SXGA		53.7 kHz	85 Hz
			48.4 kHz	60 Hz
			56.5 kHz	70 Hz
		1024 x 768	60.0 kHz	75 Hz
			68.7 kHz	85 Hz
MAC13"	VGA	1280 x 720	45.0 kHz	60 Hz
		1280 x 768	48.1 kHz	60 Hz
		1280 x 1024	64.0 kHz	60 Hz
		640 x 480	34.9 kHz	67 Hz
		832 x 624	49.7 kHz	75 Hz
MAC19"	XGA	1024 x 768	60.2 kHz	75 Hz

Apple and Macintosh are registered trademarks of Apple Computer, Inc.
DDC is a registered trademark of Video Electronics Standards Association.
Power Management is a registered trademark of Sun Microsystems, Inc.
VGA and XGA are registered trademarks of International Business Machines Co., Inc.

RS-232C port specifications

PC Control of the TV

- When a program is set, the TV can be controlled from the PC using the RS-232C terminal. The input signal (PC/AV) can be selected, the volume can be adjusted and various other adjustments and settings can be made, enabling automatic programmed playing.
- Attach an RS-232C cable cross-type (commercially available) to the supplied Din/D-Sub RS-232C for the connections.



This operation system should be used by a person who is accustomed to using computers.

Communication conditions

Set the RS-232C communications settings on the PC to match the TV's communications conditions.

The TV's communications settings are as follows:

Baud rate:	9,600 bps
Data length:	8 bits
Parity bit:	None
Stop bit:	1 bit
Flow control:	None

Communication procedure


Send the control commands from the PC via the RS-232C connector.

The TV operates according to the received command and sends a response message to the PC.

Do not send multiple commands at the same time. Wait until the PC receives the OK response before sending the next command.

Command format

Eight ASCII codes + CR



Command 4-digits: Command. The text of four characters.
Parameter 4-digits: Parameter 0-9, x, blank, ?

Parameter

Input the parameter values, aligning left, and fill with blank(s) for the remainder. (Be sure that 4 values are input for the parameter.)

When the input parameter is not within an adjustable range, "ERR" returns. (Refer to "Response code format".)

No problem to input any numerical value for "x" on the table.

0			
---	--	--	--

0	0	0	9
---	---	---	---

-	3	0	
---	---	---	--

1	0	0	
---	---	---	--

0	0	5	5
---	---	---	---

When "?" is input for some commands, the present setting value responds.

?			
---	--	--	--

?	?	?	?
---	---	---	---

Basic adjustment settings

Response code format

Normal response



Return code (ODH)

Problem response (communication error or incorrect command)



Return code (ODH)

Command table

- About the command except being indicated here, it is outside the quarantine range of operation.

[illegible]

NOTE


- If an underbar () appears in the parameter column, enter a space.
- If an asterisk (*) appears, enter a value in the range indicated in brackets under CONTROL CONTENTS.
- As long as that from which the parameter ($\times$) in the table is a numerical value, it may write anything.

AV input mode menu items

List of AV menu items to help you with operations




OPC
Backlight
Contrast
Brightness
Color
Tint
Sharpness
Advanced
C.M.S.
Color Temp.
Black
3D-Y/C
Monochrome
Film Mode
I/P Setting




Treble
Bass
Balance
Dolby Virtual



No Signal Off
No Operation Off




EZ Setup
CH Setup
Input Label
Parental CTRL
Position
Picture Flip
Language




Audio Only
Digital Noise Reduction
HDMI Setup
Input Select
Output Select
Quick Shoot
Caption Setup

PC input mode menu items

List of PC menu items to help you with operations




OPC
Backlight
Contrast
Brightness
Red
Green
Blue
Advanced
C.M.S.




Treble
Bass
Balance
Dolby Virtual



Power Management




Input Signal
Auto Sync.
Input Label
Fine Sync.
Picture Flip
Language



Audio Only
Input Select
Output Select
Quick Shoot


DIMENSIONS (LC-26GA5U)

Unit: inch/(mm)

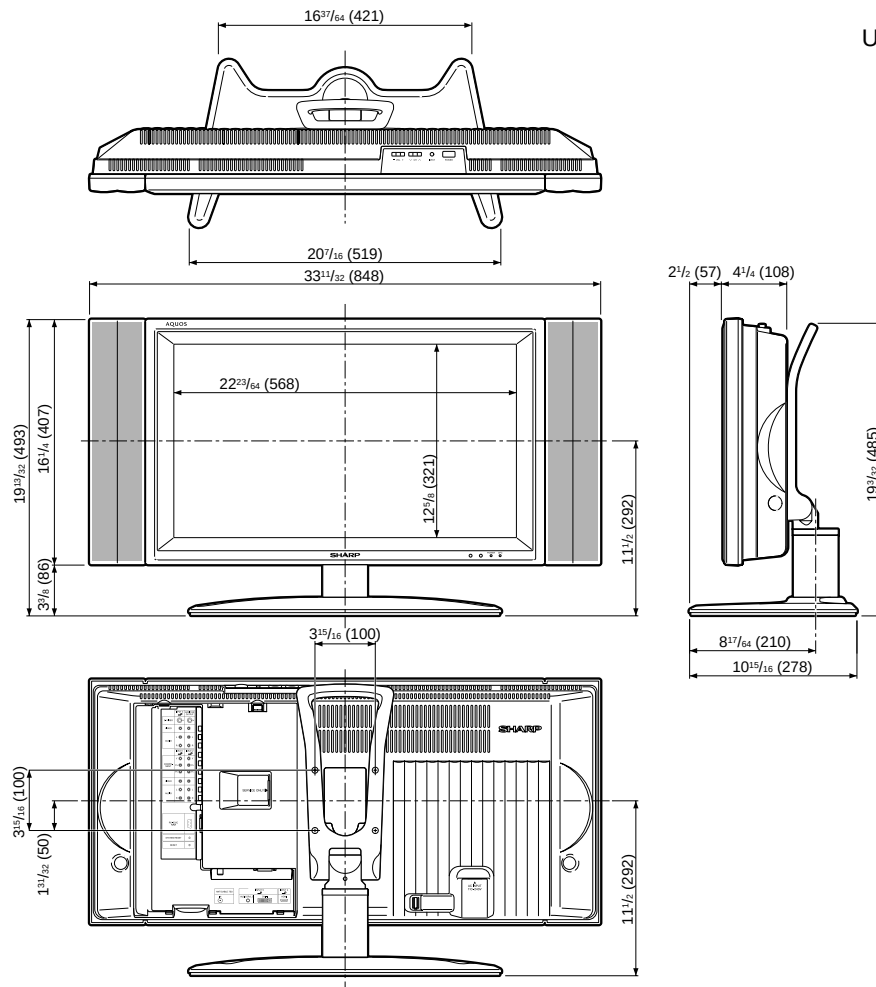


DIMENSIONS (LC-32GA5U)

Unit: inch/(mm)


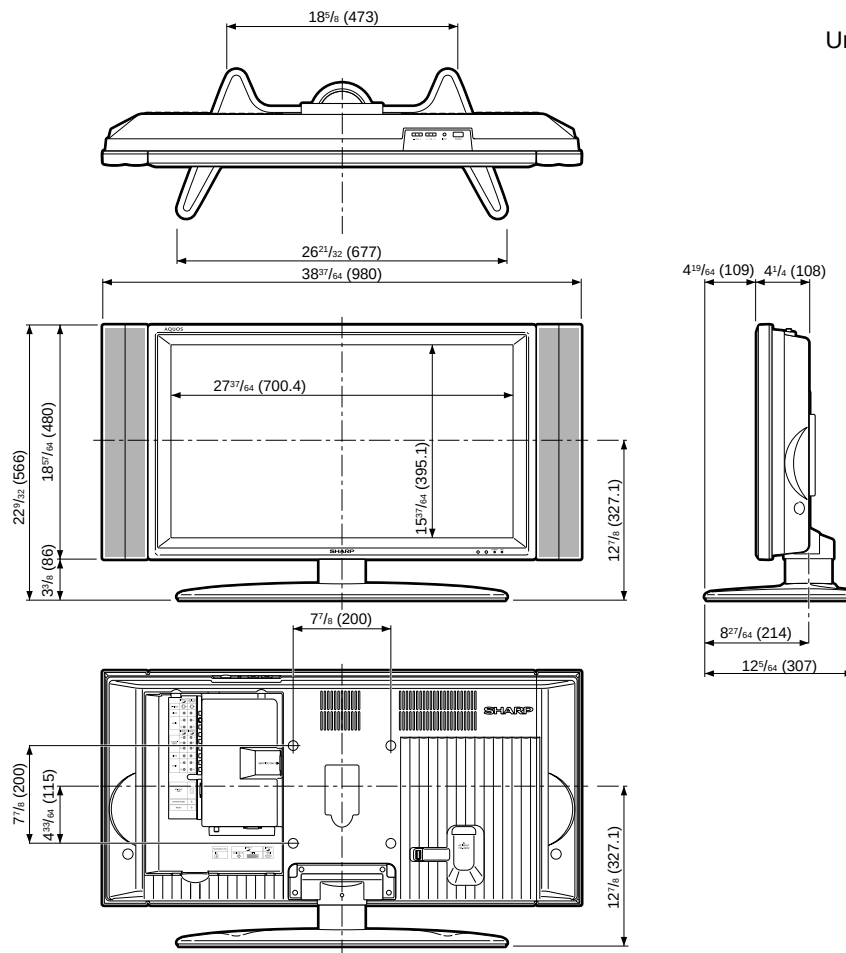


REMOVING OF MAJOR PARTS


1. Remove the four lock screws from the stand, and detach the stand.
2. Detach the terminal cover.
3. Remove the 19 lock screws from the cabinet-B, and detach the cabinet-B. (only for LC-26GA5U)
3. Remove the 26 lock screws from the cabinet-B, and detach the cabinet-B. (only for LC-32GA5U)
4. Remove the five lock screws from the reinforcement angle, and detach the reinforcement angle.
5. Remove the key PWB.
 - 5-1. Remove the tow lock screws from the top cover.
 - 5-2. Remove the tow lock screws from the key PWB.
6. Remove the 10 lock screws from the PWB shield case, and detach the PWB shield case. (only for LC-26GA5U)
6. Remove the 12 lock screws from the PWB shield case, and detach the PWB shield case. (only for LC-32GA5U)

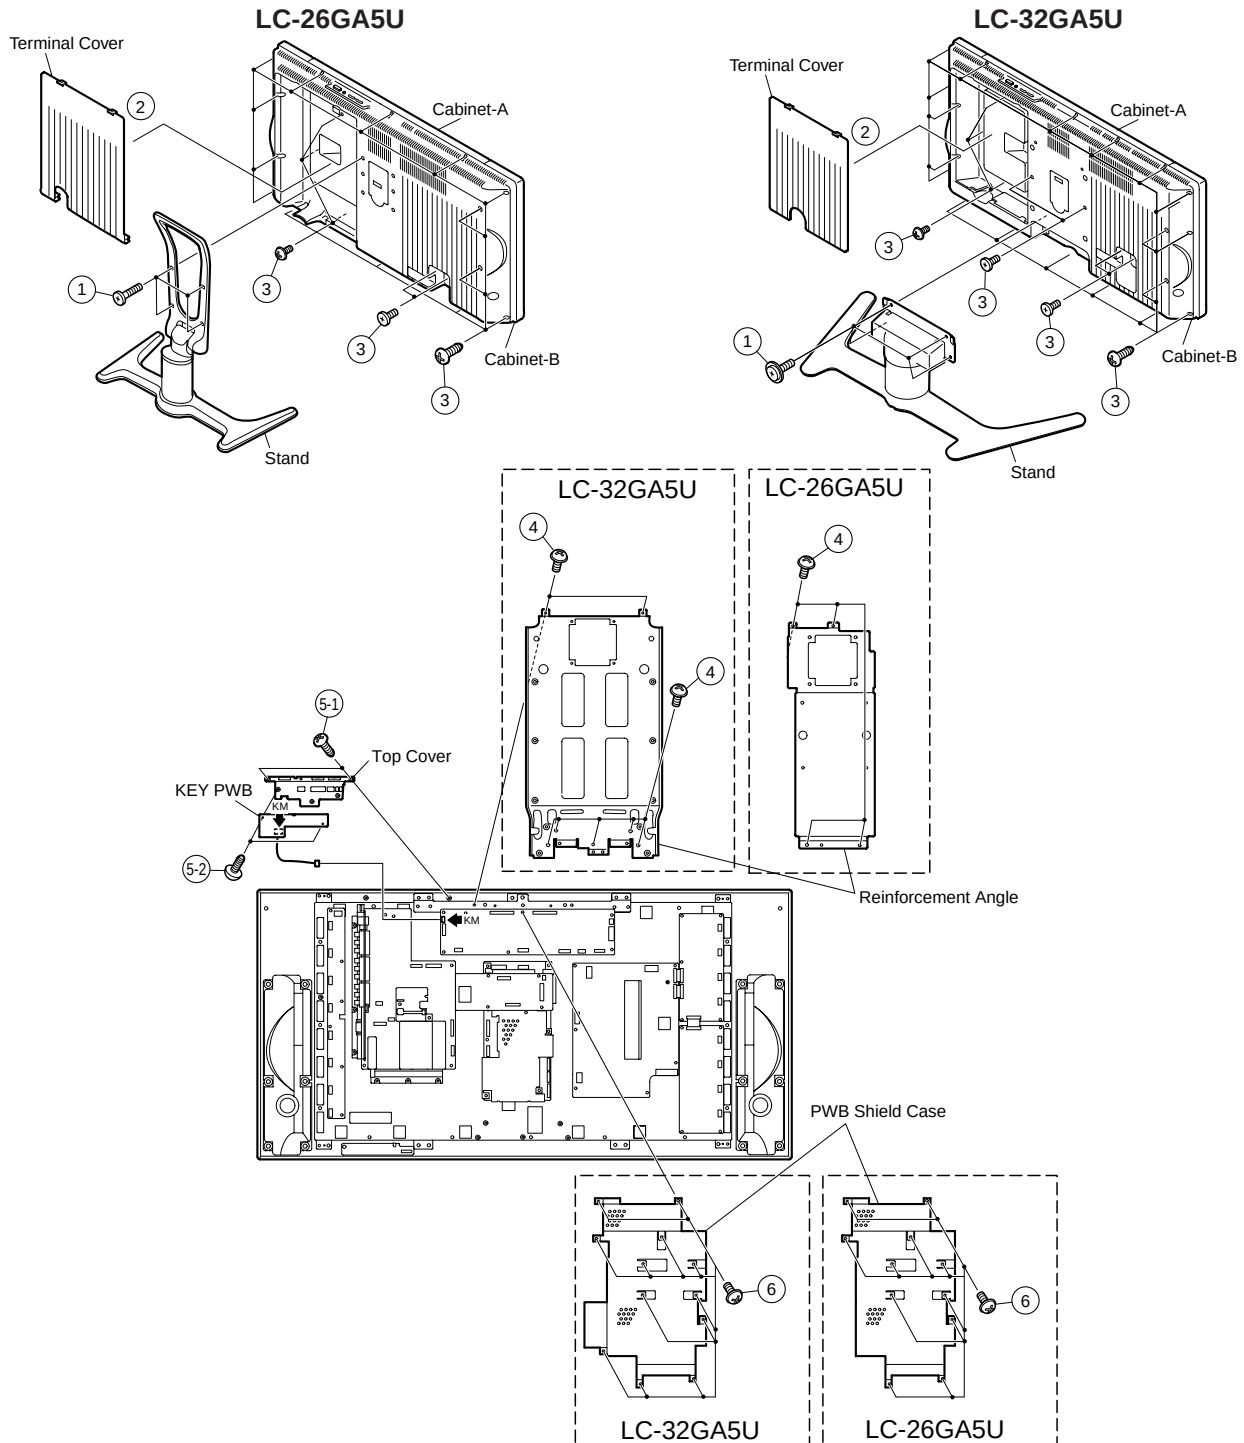

7. Disconnect all the connectors from all PWBs.
8. Remove the main and CPU PWB.
 - 8-1. Remove the two lock screws from the main/CPU unit.
 - 8-2. Detach the CPU PWB.
 - 8-3. Remove the one lock screw from the main PWB shield (bottom), and detach the main PWB shield (bottom).
9. Detach the two speaker box.
10. Remove the two lock screws from the R/C, LED PWB, and detach the R/C, LED PWB.

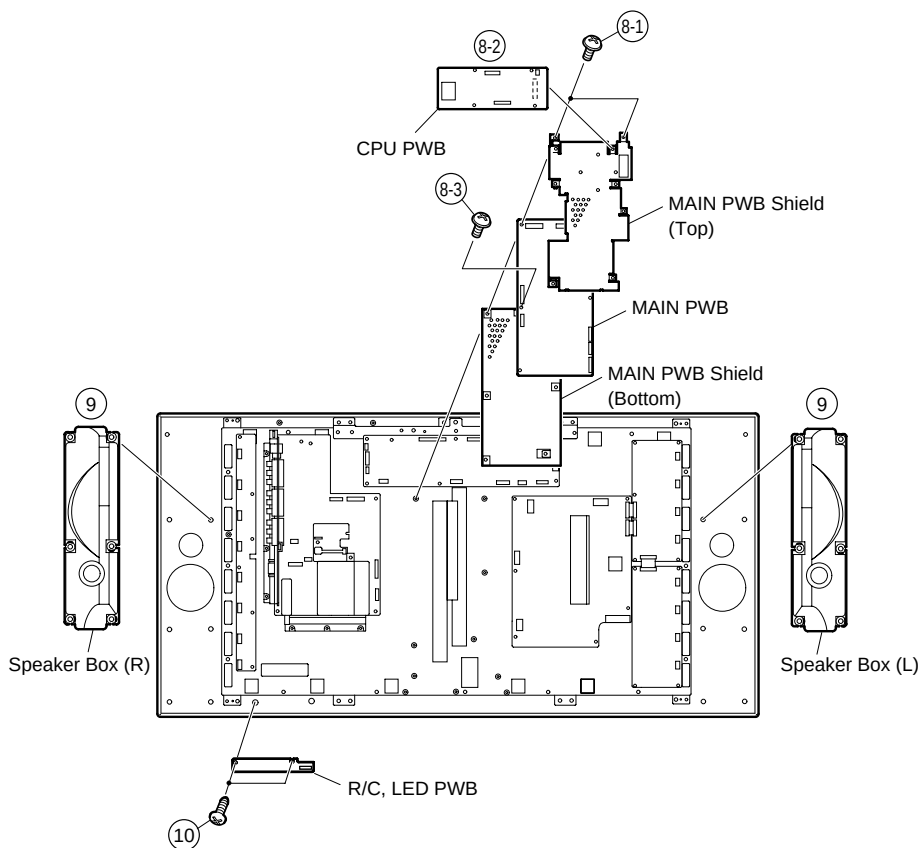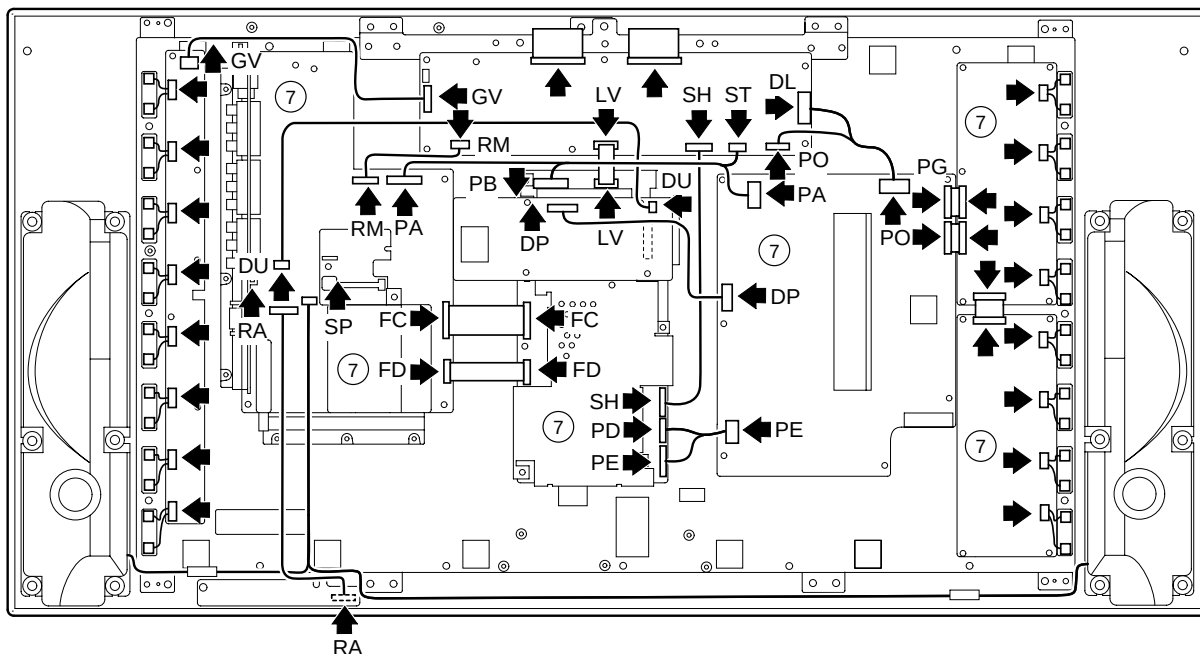


11. Remove the two lock screws from the LCD control PWB, and detach the LCD control PWB and heat sink.
12. Remove the six lock screws from the power PWB, and detach the power PWB.
13. Remove the four lock screws from the chassis frame (S), and detach the chassis frame (S).
14. Remove the AV PWB.
 - 14-1. Remove the six lock screws from the AV unit, and detach the AV unit.
 - 14-2. Remove the four lock screws from the chassis frame (L), and detach the chassis frame (L)
15. Remove the four lock screws from the inverter PWB, and detach the inverter PWB. (only for LC-26GA5U)
15. Remove the four lock screws from the inverter-1 PWB, and detach the inverter-1 PWB. (only for LC-32GA5U)
16. Remove the four lock screws from the inverter-2 PWB, and detach the inverter-2 PWB. (only for LC-32GA5U)
17. Remove the three lock screws from the inverter-GND PWB, and detach the inverter-GND PWB. (only for LC-26GA5U)
17. Remove the six lock screws from the inverter-GND PWB, and detach the inverter-GND PWB. (only for LC-32GA5U)
18. Remove the four lock screws from the reinforcement angle (bottom), and detach the reinforcement angle (bottom). (only for LC-26GA5U)
19. Remove the two lock screws from the LCD panel unit, and detach the LCD panel unit. (only for LC-26GA5U)
19. Remove the one lock screw from the LCD panel unit, and detach the LCD panel unit. (only for LC-32GA5U)

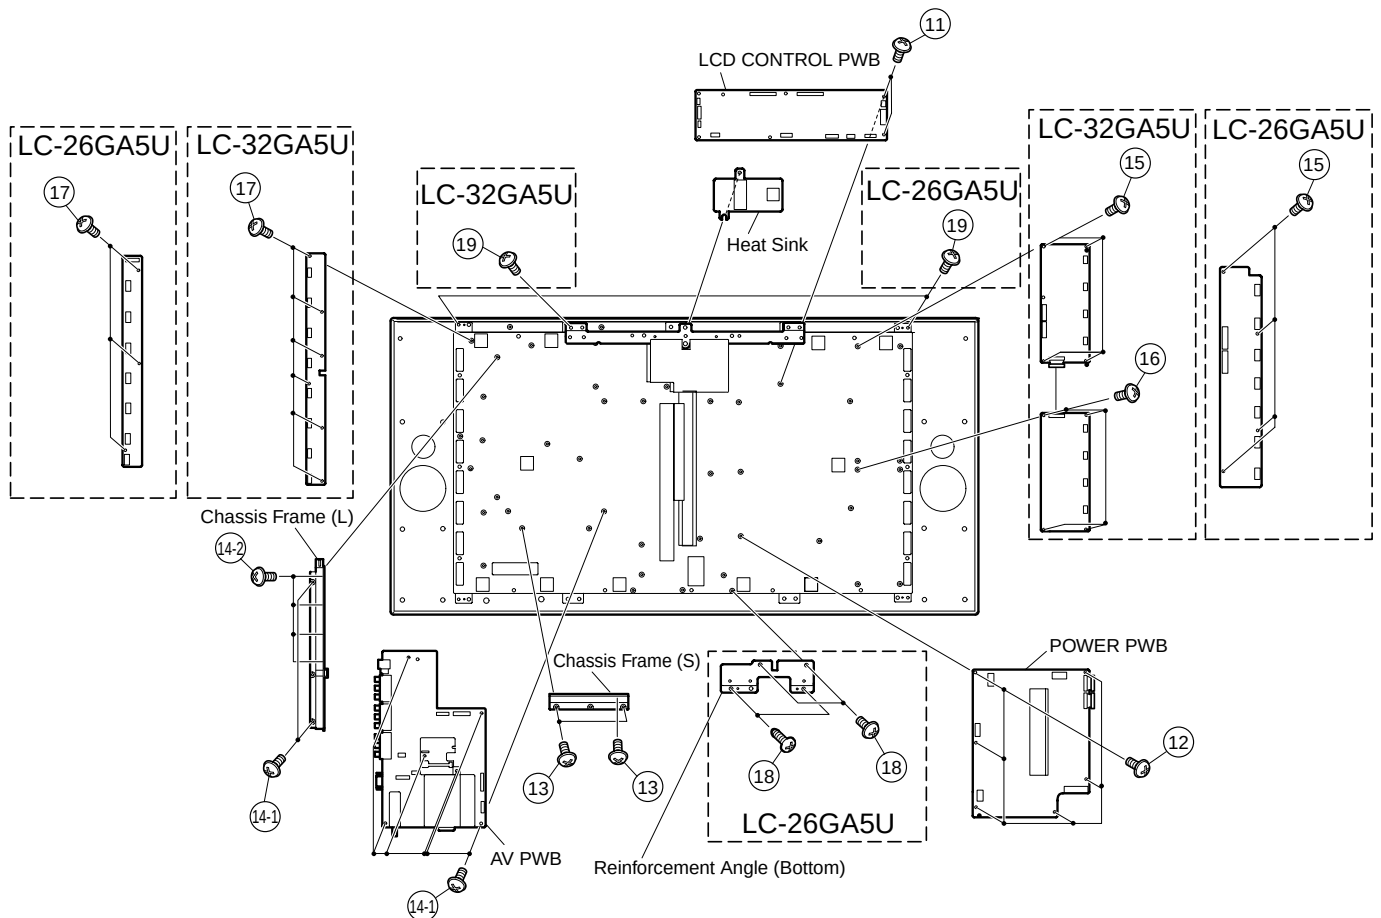


REMOVING OF LCD PANEL UNIT (LC-26GA5U)

- Precautions in handling the liquid crystal panel
 1. Handle it in a clean room. (above 50% humidity)
 2. The worker must wear an earth band.
 3. Be careful not to drop, vibrate and shock the panel.
 4. Use an ionizer. (within 30 cm)
20. Remove the four screws from the LCD panel unit, and detach the LCD panel unit.
 21. Remove the four sheet spacers.
 22. Detach the reflection/deflection and diffusion sheets and diffusion panel.
 23. Remove the two lock screws from the lamp holder(top), and detach the lamp holder(top).
 24. Detach the fluorescent lamp from the lamp clip.

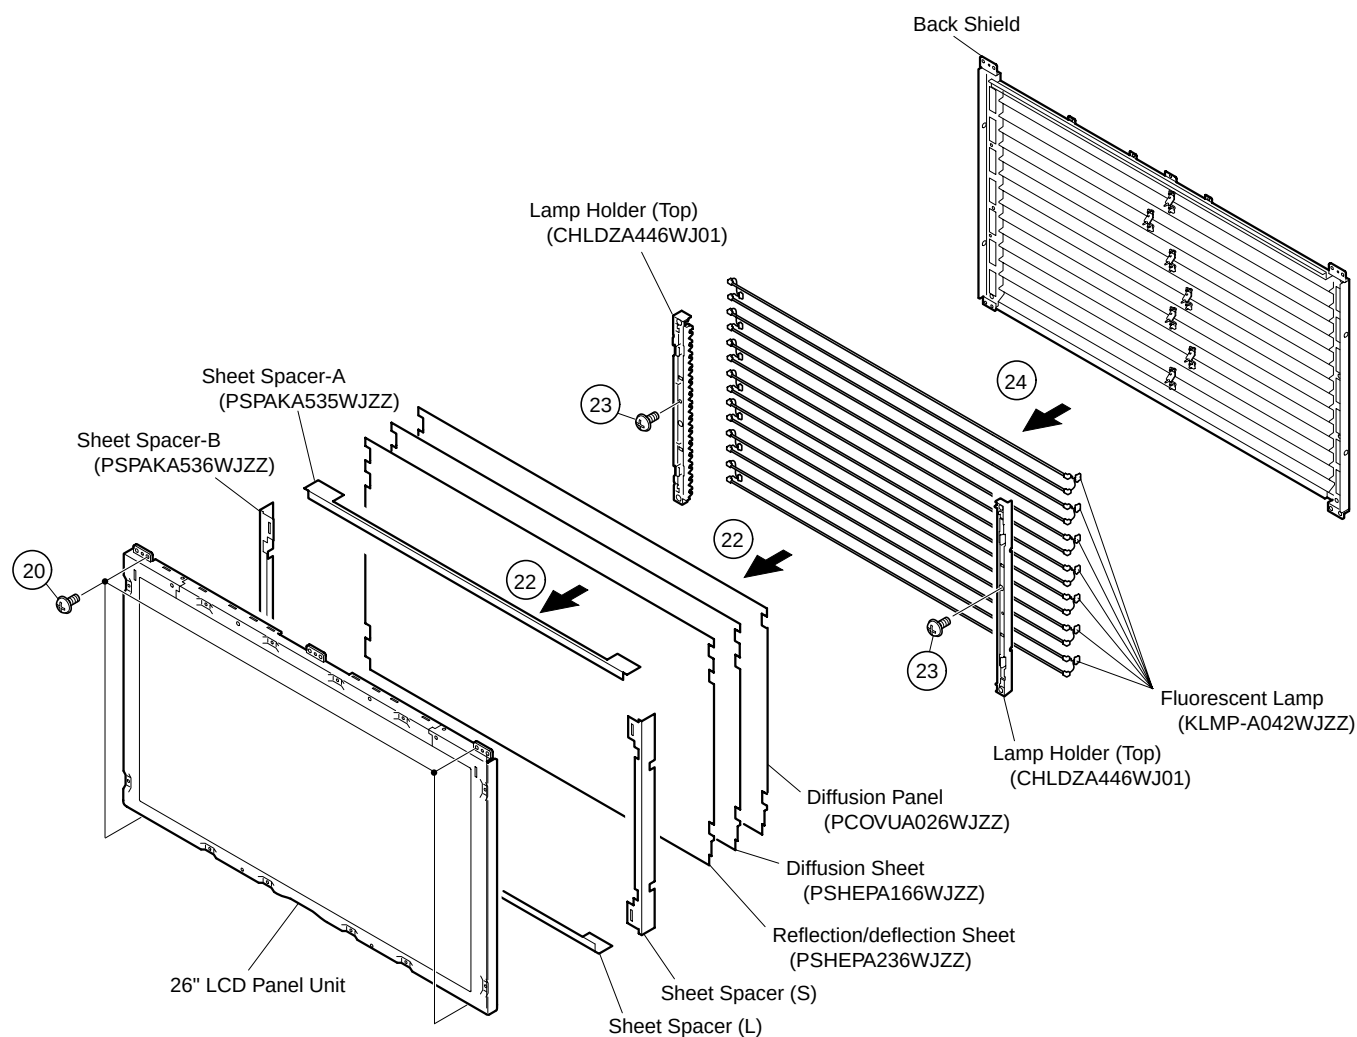

REMOVING OF LCD PANEL UNIT (LC-32GA5U)

- Precautions in handling the liquid crystal panel
 1. Handle it in a clean room. (above 50% humidity)
 2. The worker must wear an earth band.
 3. Be careful not to drop, vibrate and shock the panel.
 4. Use an ionizer. (within 30 cm)
- 20. Remove the four screws from the LCD panel unit, and detach the LCD panel unit.
- 21. Remove the four sheet spacers.
- 22. Detach the reflection/deflection and diffusion sheets and diffusion panel.
- 23. Remove the two lock screws from the lamp holder(top), and detach the lamp holder(top).
- 24. Detach the fluorescent lamp from the lamp clip.

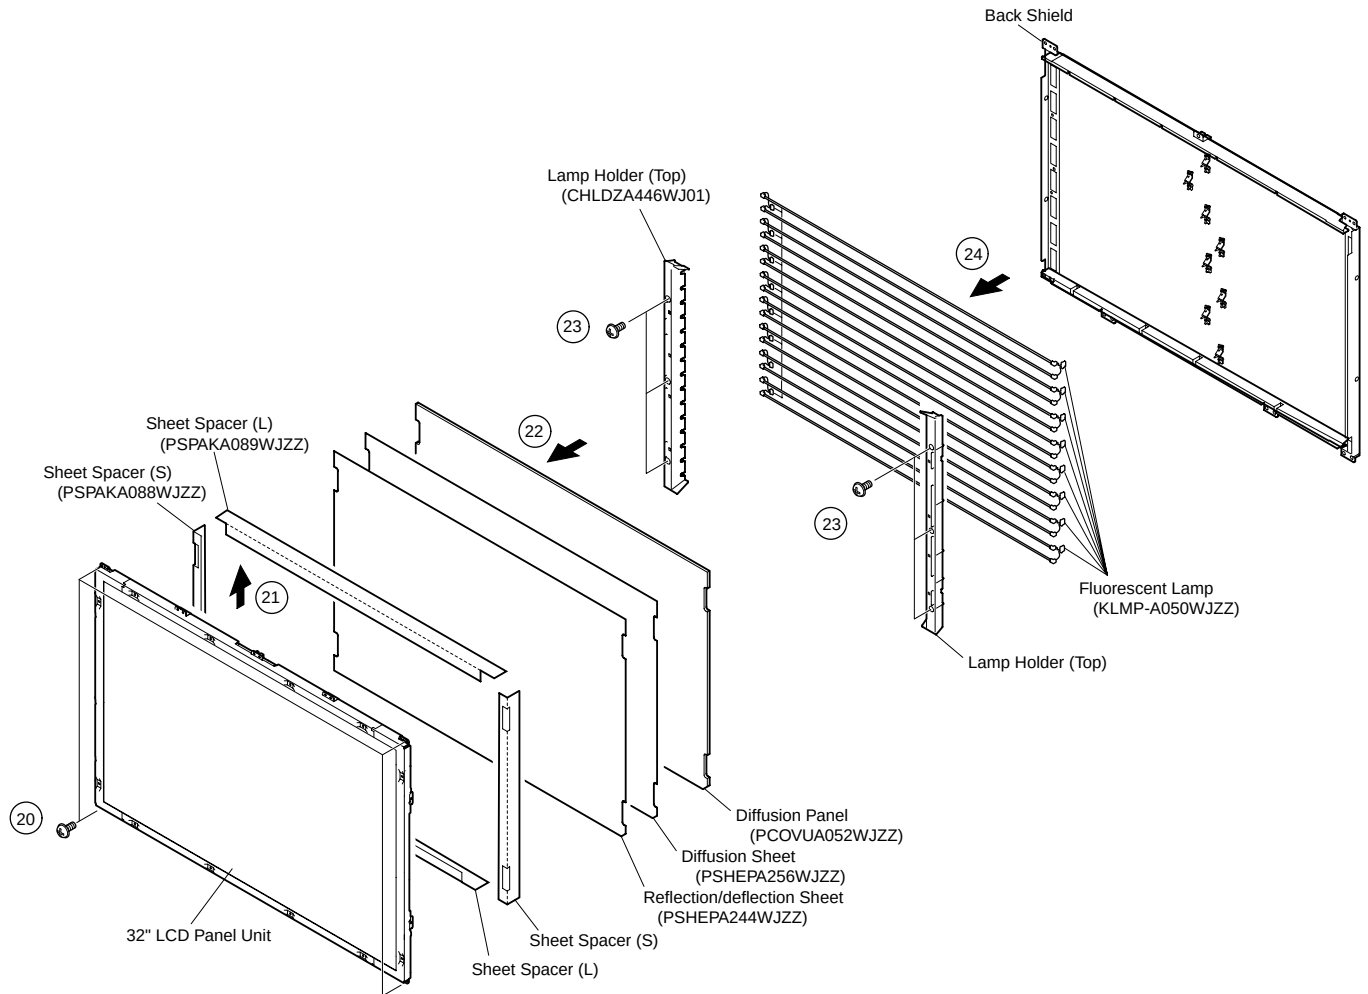

ADJUSTMENT PROCEDURE

The adjustment values are set to the optimum conditions at the factory before shipping. If a value should become improper or an adjustment is required due to part replacement, make an adjustment according to the following procedure.

1. After replacement of any PWB unit and/or IC for repair, please note the following.

When replacing the following units, make sure to prepare the new units loaded with updated software.

CPU unit: DUNTKC796FE01 (LC-26GA5U)

DUNTKC796FE02 (LC-32GA5U)

2. Upgrading of each microprocessor software

**Caution: Never "POWER OFF" the unit when software upgrade is ongoing.
Otherwise the system may be damaged beyond recovery.**

2-1 Software version upgrade

The model employs the following software.

- Main software
- Monitor microprocessor software (Display)

The main software and the monitor microprocessor software can be upgraded by using a general-purpose SD memory card.

The followings are the procedures for upgrading, explained separately for each of the main software, the monitor microprocessor software and the card microprocessor software.

2-2 Main software version upgrade


Get ready before you start

- SD memory card of 16MB or higher capacity
- PC running on Windows 98/98SE/ME/2000/XP operating system
- SD memory card reader/writer with USB connectivity and PC card adapter
- SD memory card formatting software
(Downloadable at http://panasonic.jp/support/audio/sd/download/sd_formatter.html)


Preparations

To upgrade the main software, it is necessary to get ready the SD card for version upgrade before you start. Follow the steps below and create the SD card for version upgrade.

- ① Insert the SD card into the SD card reader/writer. Start the SD card formatting software. Click [Format].
(When you have the drive options, select the drive where the SD card is inserted before you proceed.)

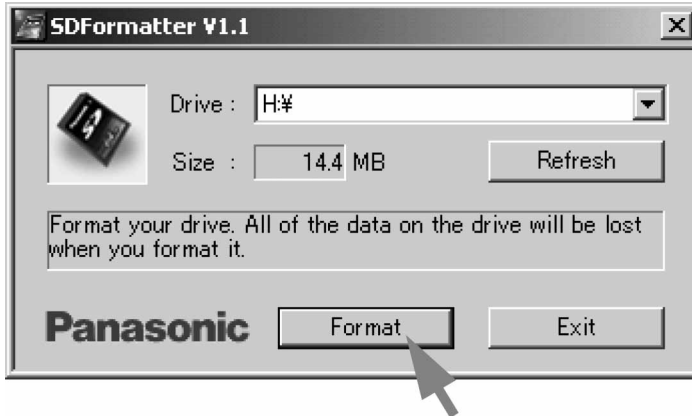

- ② When the formatting is over, the following window appears. Click [OK].

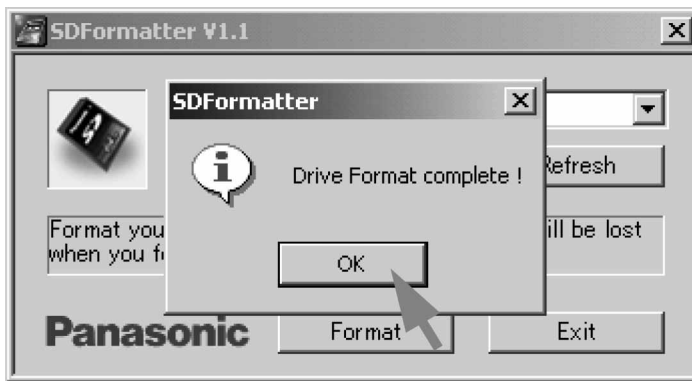

- ③ Click [End] to finish the formatting.

Note: When you are done, take out the SD card once to make sure it is finished, and then insert it again.



- ④ Copy the binary image file KA5UAxxx.SDC (named temporarily) for version upgrade to the root directory (folder) of the SD card drive.

Note: In the SD card drive, do not store other folders or unrelated files, or more than one binary image files for version upgrade.

Now the SD card for version upgrade is ready.

How to upgrade the software


- ① Unplug the AC cord.
- ② Insert the SD card for version upgrade (prepared as above) into the service socket located below left of the right side cooling fan in the rear of the unit, in a way that the cut corner of the SD card comes at the right-hand side.

Note: If the SD card is inserted in a wrong way, the card will go deep inside the unit beyond retrieval. Take due care to insert the SD card correctly.

- ③ While depressing the SYSTEM RESET button located below the RS-232C connector in the rear left side of the unit, plug in the AC cord.


Note: After the unit is started, you may release the SYSTEM RESET button.

- ④ After the unit startup, the system upgrade screen as shown below appears within 10-20 seconds.

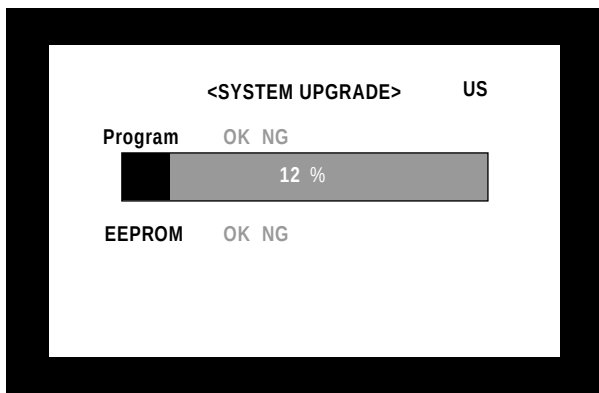


- ⑤ Even a single failure in the process will trigger the upgrade failure screen as shown below. The word "NG" changes to red for the item failed.

Note: In the event of a failure, repeat the upgrading process. If the process repeatedly fails, it is likely that the hardware is troubled.

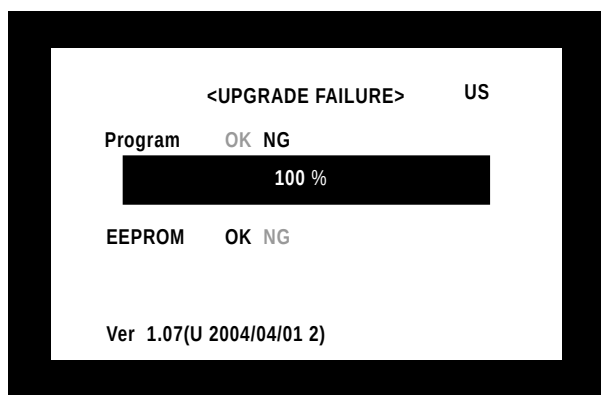

- ⑥ Upon completion of the whole process, the upgrade success screen as shown below appears. You can check the new software version on this screen. The version information appears after the upgrade is complete.

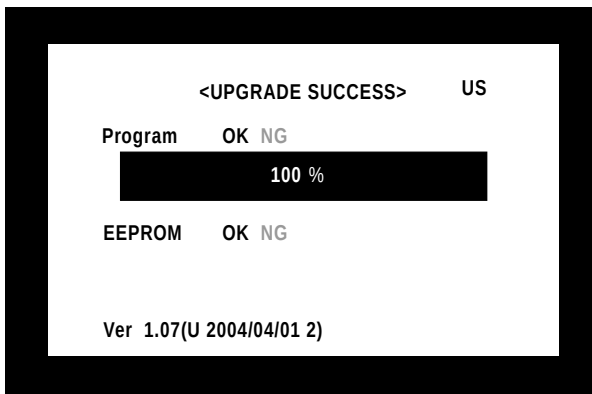

- ⑦ Shut off the AC power to the unit (unplug the AC cord), and remove the SD card for version upgrade.
 ⑧ Now the software version upgrade is complete.

Note: When you are done with the software version upgrade, start the set, go to the top page of the adjustment process screen and check the main software version information.

2-3 Monitor microprocessor software version upgrade

Get ready before you begin

Get ready the same items as listed in the "Main software version upgrade".

Preparation

Create the SD card for monitor microprocessor software version upgrade in the same manner as explained in the "Main software version upgrade". Copy the binary image file for monitor microprocessor software version upgrade to the SD card drive.

How to upgrade the software

During the monitor microprocessor software version upgrade, the progress of upgrading is not shown on the display screen. The upgrading process is seen in the blinking of the power LED.

- ① Unplug the AC cord.
- ② Insert the SD card for version upgrade (prepared as above) into the service socket located below left of the right side cooling fan in the rear of the unit, in a way that the cut corner of the SD card comes at the right-hand side.

Note: If the SD card is inserted in a wrong way, the card will go deep inside the unit beyond retrieval. Take due care to insert the SD card correctly.

- ③ While depressing the SYSTEM RESET button located below the RS-232C connector in the rear left side of the unit, plug in the AC cord.

Note: After the unit is started, you may release the SYSTEM RESET button.

Caution!!

The moment this operation is done, the upgrading of the monitor microprocessor software starts. While the upgrade is ongoing, never power off the unit. Otherwise the upgrade will fail and the system may have a serious damage beyond recovery (inability to start).

- ④ After the unit startup, the power LED starts blinking in green within 10-20 seconds.
- ⑤ Wait until the power LED stops blinking, the unit restarts automatically, and the normal startup screen appears (it will take 2-3 minutes).
- ⑥ Shut off the AC power to the unit (unplug the AC cord), and remove the SD card for version upgrade.
- ⑦ Now the software version upgrade is complete.

Note: When you are done with the software version upgrade, start the set, go to the top page of the adjustment process screen and check the monitor microprocessor software version information.

3.Entering and exiting the adjustment process mode

- (1) Before entering the adjustment process mode, press the "TV RESET" button or execute the AV position RESET in the video adjustment menu.
- (2) While holding down the "VOL (-)" and "INPUT" keys at a time, press the POWER switch of the main unit to turn on the power. (The "VOL (-)" and "INPUT" keys should be pressed and held until the display appears.) The letter "K" appears on the screen.
- (3) Next, hold down the "VOL (-)" and "CH (✓)" keys at a time.
Multiple lines of blue characters appearing on the display indicate that the unit is now in the adjustment process mode.
When you fail to enter the adjustment process mode (the display is the same as normal startup), retry the procedure.
- (4) To exit the adjustment process mode after the adjustment is done, unplug the AC cord from the outlet to make a forced shutdown. (When the power was turned off with the remote controller, once unplug the AC cord and plug it again. In this case, wait 10 seconds or so before plugging.)

Caution: Use due care in handling the information described here lest your users should know how to enter the adjustment process mode. If the settings are tampered in this mode, unrecoverable system damage may result.


4.Remote controller key operation and description of display in adjustment process mode

(1) Key operation

Remote controller key	Main unit key	Function
CH (✓/∧)	CH (✓/∧)	Moving an item (line) by one (UP/DOWN)
VOL (+/-)	VOL (+/-)	Changing a selected item setting (+1/-1)
Cursor (UP/DOWN)	_____	Tuning a page (PREVIOUS/NEXT)
Cursor (LEFT/RIGHT)	_____	Changing a selected line setting (+10/-10)
INPUT	_____	Input switching (toggle switching) (TV→INPUT1→INPUT2→INPUT3→INPUT4→INPUT5)
ENTER	_____	Executing a function

* Input mode is switched automatically when relevant adjustment is started so far as the necessary input signal is available.

(2) Description of display

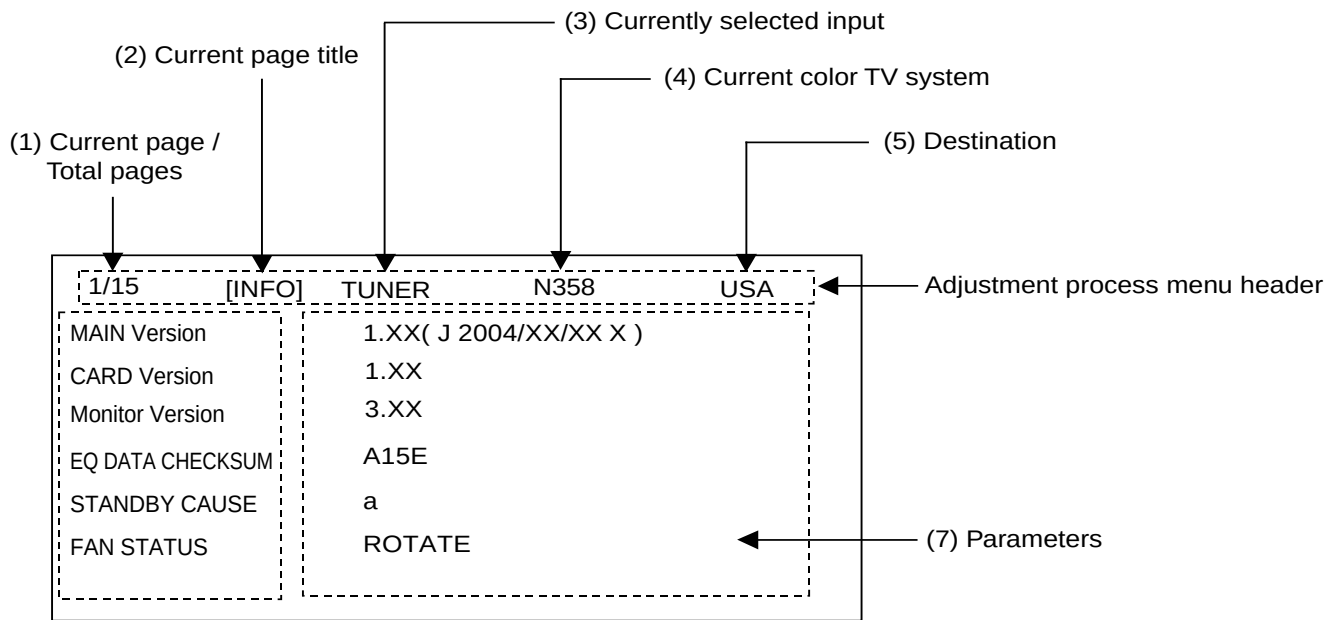

5. List of adjustment process mode menu

The character string in brackets [] will appear as a page title in the adjustment process menu header.

Page	Line	Item	Description	Remarks (adjustment detail, etc.)
1		[INFO]		
	1	MAIN Version	Main microprocessor version	Version display
	2	CARD Version	Card unit version	Card unit microprocessor software version
	3	Monitor Version	Monitor version	Obtained from the monitor. (Displays panel size and type as well.)
	4	EQ DATA CHECKSUM	Audio data checksum	Audio data checksum display
	5	STANDBY CAUSE	Standby cause	Last status which caused standby
	6	FAN STATUS	Fan	
2		[INIT]		
	1	INDUSTRY INIT	Initialization to factory settings	Initialization to factory settings
	2	HOTELMODE	Hotel mode settings	
	3	Center Acutime	Accumulated AVC operation time	Reset by initialization
	4	RESET	Reset	
	5	BacklightAcutime	Accumulated monitor operation time	Not reset by initialization
	6	RESET	Reset	
	7	VIC XPOS		
	8	VIC YPOS		
	9	VIC COLOR		
	10	VIC SIGNAL_TYPE		
	11	VIC READ		
3		[N358MAIN]		
	1	N358 ALL ADJ	N358MAIN+SUB+TUNER	Auto N358 Main, Sub and Tuner DAC adjustments
	2	N358 MAIN ADJ	Auto ALL	Auto N358 Main video adjustment
	3	N358 SUB ADJ	Auto ALL	Auto N358 Sub video adjustment
	4	TUNER DAC ADJ	IC400	
	5	N358 MAIN CONTRAST	IC400	Contrast
	6	N358 MAIN Cb GAIN	IC400	Cb gain
	7	N358 MAIN Cr GAIN	IC400	Cr gain
	8	N358 SUB CONTRAST	IC500	Contrast
	9	N358 SUB Cb GAIN	IC500	Cb gain
	10	N358 SUB Cr GAIN	IC500	Cr gain
	11	TUNER A DAC	TUNER-A DAC	Tuner DAC
	12	TUNER B DAC	TUNER-B DAC	Tuner DAC
4		[N358SUB]		
	1	TUNER VCHIP TEST(69ch)	Auto ALL	
	2	N358 SUB CONTRAST	IC500	N358 Sub video contrast
	3	N358 SUB Cb GAIN	IC500	Cb gain
	4	N358 SUB Cr GAIN	IC500	Cr gain
	5	TUNER VCHIP TEST(10ch)		
	6	TUNER VCHIP TEST(15ch)		
5		[COMP15KMAIN]		
	1	COMP15K ALL ADJ	Auto ALL	Auto COMP15K Main + Sub adjustments
	2	COMP15KAD MAIN ADJ	Auto ALL	Auto COMP15K Main video adjustment
	3	COMP15K MAIN ADJ	Auto ALL	
	4	COMP15K MAIN CONTRAST	IC400	Contrast
	5	COMP15K MAIN Cb GAIN	IC400	Cb gain
	6	COMP15K MAIN Cr GAIN	IC400	Cr gain
	7	COMP15K Y OFFSET		
	8	COMP15K Cb OFFSET		
	9	COMP15K Cr OFFSET		
	10	COMP15K SUB CONTRAST	IC500	Contrast
	11	COMP15K SUB Cb GAIN	IC500	Cb gain
	12	COMP15K SUB Cr GAIN	IC500	Cr gain
6		[COMP15KSUB]		
	1	COMP15K SUB ADJ	Auto ALL	Auto COMP15K Sub video adjustment
	2	COMP15K SUB CONTRAST	IC500	Contrast
	3	COMP15K SUB Cb GAIN	IC500	Cb gain
	4	COMP15K SUB Cr GAIN	IC500	Cr gain
7		[HDTV]		
	1	HDTV ADJ		Auto HDTV video adjustment
	2	CONTRAST	IC3700	Contrast
	3	Cb GAIN	IC3700	Cb gain
	4	Cr GAIN	IC3700	Cr gain
	5	HDTV Y OFFSET		
	6	HDTV Cb OFFSET		
	7	HDTV Cr OFFSET		

8		[DVI ANALOG]		
	1	DVI ANALOG		Auto DVI analog video adjustment
	2	R CUTOFF	IC3700	
	3	G CUTOFF	IC3700	
	4	B CUTOFF	IC3700	
	5	R DRIVE	IC3700	
	6	G DRIVE	IC3700	
	7	B DRIVE	IC3700	
9		[DVI DIGITAL]		
	1	DVI DIGITAL	IC3700	Auto DVI digital video adjustment Contrast
	2	CONTRAST		
	3	R CUTOFF		
	4	G CUTOFF		
	5	B CUTOFF		
	6	R DRIVE		
	7	G DRIVE		
	8	B DRIVE		
10		[M GAMMA]		
	1	MONITOR R GAMMA LO		Monitor W/B adjustment
	2	MONITOR G GAMMA LO		
	3	MONITOR B GAMMA LO		
	4	MONITOR R GAMMA HI		
	5	MONITOR G GAMMA HI		
	6	MONITOR B GAMMA HI		
	7	GAMMA WRITE		Writing in monitor gamma table Reset of monitor gamma table
	8	GAMMA RESET		
11		[M GAMMA R]		
	1	MONITOR R GAMMA 1		
	2	MONITOR R GAMMA 2		
	3	MONITOR R GAMMA 3		
	4	MONITOR R GAMMA 4		
	5	MONITOR R GAMMA 5		
	6	MONITOR GAMMA 6		
	7	GAMMA WRITE		
	8	GAMMA RESET		
12		[M GAMMA G]		
	1	MONITOR G GAMMA 1		
	2	MONITOR G GAMMA 2		
	3	MONITOR G GAMMA 3		
	4	MONITOR G GAMMA 4		
	5	MONITOR G GAMMA 5		
	6	MONITOR B GAMMA 6		
	7	GAMMA WRITE		
	8	GAMMA RESET		
13		[M GAMMA B]		
	1	MONITOR B GAMMA 1		
	2	MONITOR B GAMMA 2		
	3	MONITOR B GAMMA 3		
	4	MONITOR B GAMMA 4		
	5	MONITOR B GAMMA 5		
	6	MONITOR B GAMMA 6		
	7	GAMMA WRITE		
	8	GAMMA RESET		
14		[PATTERN]		
	1	CVIC PATTERN	CVIC-generated internal pattern display	CVIC internal pattern display
	2	GPU PATTERN	SEINE-generated internal pattern display	SEINE internal pattern display
15		[ETC]		
	1	EEP SAVE	Storage of adjustment value	Saving adjustment value in storage area
	2	EEP RECOVER	Retrieval of adjustment value	Retrieving adjustment value from storage area
	3	CARD REC INPUT	Permission of card recording by external input source	
	4	STANDBY CAUSE RESET		

6. Special features

- * STANDBY CAUSE (Page 1/15)
Display of a cause (code) of the last standby
The cause of the last standby is recorded in EEPROM whenever possible.
Checking this code will be useful in finding a problem when you repair the troubled set.
- * EEP SAVE (Page 15/15)
Storage of EEP adjustment value
- * EEP RECOVER (Page 15/15)
Retrieval of EEP adjustment value from storage area

7. Video signal adjustment procedure * Adjustment process mode menu is listed in section 5.

(1) Signal check



Signal generator level adjustment check (Adjustment to the specified level)

- Composite signal : 0.714Vp-p $\pm$ 0.02Vp-p (Pedestal to white level)
- 15K component signal : Y level : 0.714Vp-p $\pm$ 0.02Vp-p (Pedestal to white level)
PB, PR level: 0.7Vp-p $\pm$ 0.02Vp-p
- 33K component signal : Y level : 0.7Vp-p $\pm$ 0.02Vp-p (Pedestal to white level)
PB, PR level: 0.7Vp-p $\pm$ 0.02Vp-p
- DVI-I (analog RGB) signal : RGB level : 0.7Vp-p $\pm$ 0.02Vp-p (Pedestal to white level)


(2) Entering the adjustment process mode

Enter the adjustment process mode according to the steps described in section 3.


(3) N358 composite signal adjustment (Main and Tuner)

	Adjustment item	Adjustment conditions	Adjustment procedure
1	Adjustment	N358 signal US-10ch	Feed the split field color bar signal (75% color saturation) to INPUT 1 input. Feed the RF signal (by use of US-10ch) to TUNER-A and TUNER-B. [Video input signal]  ↑100% white [US-10CH]  ↑100% white
2	Auto adjustment performance		Bring the cursor on [■N358 ALL ADJ] and press [ENTER]. [■N358 ALL ADJ FINISH] appears when finished.


(4) Component 15K signal adjustment (Main)

	Adjustment item	Adjustment conditions	Adjustment procedure
1	Adjustment	480i signal	Feed the 100% color bar signal to VIDEO 1 component input.  ↑100% white
2	Auto adjustment performance		Bring the cursor on [■COMP 15K ALL ADJ] and press [ENTER]. [■COMP 15K ALL ADJ FINISH] appears when finished.


(5) Component 33K signal adjustment

	Adjustment item	Adjustment conditions	Adjustment procedure
1	Adjustment	1080i signal	Feed the 100% color bar signal to VIDEO 1 component input.  ↑100% white
2	Auto adjustment performance		Bring the cursor on [■HDTV ADJ] and press [ENTER]. [■HDTV ADJ FINISH] appears when finished.

(6) DVI-I (analog) signal adjustment

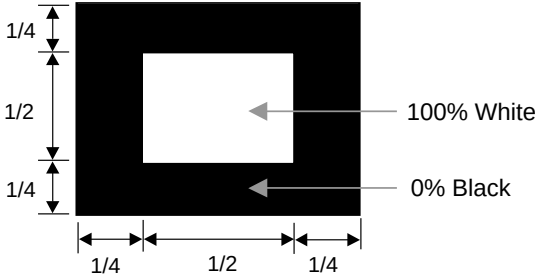	Adjustment item	Adjustment conditions	Adjustment procedure
1	Adjustment	DVI-I (analog) Signal: XGA (1024x768) 60Hz SYNC:HV Separate	Feed the 100% white 1/2 window pattern signal to DVI-I (analog) input. 
2	Auto adjustment performance		Bring the cursor on [■DVI ANALOG ADJ] and press [ENTER]. [■DVI ANALOG ADJ FINISH] appears when finished.

(7) DVI-I (digital) signal adjustment

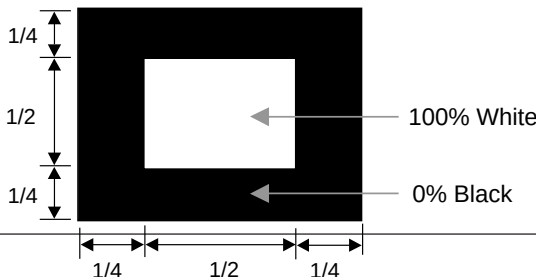	Adjustment item	Adjustment conditions	Adjustment procedure
1	Adjustment	DVI-I (digital) Signal: XGA (1024x768) 60Hz SYNC:HV Separate	Feed the 100% white 1/2 window pattern signal to DVI-I (digital) input. 
2	Auto adjustment performance	Page 9/15	Bring the cursor on [■DVI DIGITAL ADJ] and press [ENTER]. [■DVI DIGITAL ADJ FINISH] appears when finished.

8. White balance adjustment

	Adjustment item	Adjustment conditions	Adjustment procedure																																											
1	Setting		For detailed adjustment procedure, refer to the Kameyama Model Integral Monitor White Balance Adjustment Specifications (Ver. 1.01). Take the following adjustment conditions. * Make sure the Component 15K adjustment is complete. 1. Connect the background adjustment tool to the monitor. 2. Make the following settings with the set. AV mode :[STANDARD] Color temperature :[Middle] Monochrome :[ON] Black :[OFF] 3. Feed the component 15K (60Hz) adjustment signal to the INPUT1 jack to show up the adjustment screen (High: 80%, Low: 30%).																																											
2	Adjustment		For detailed adjustment procedure, refer to the "Kameyama Model Integral Monitor White Balance Adjustment Specifications (Ver. 1.01)". * White balance adjustment: Two-point adjustment (80%, 30%) * Take the following adjustment conditions. 1. Using the MGLB**** and MGLR**** commands, adjust the 30% pattern to the reference level. 2. Using the MGLB**** and MGLR**** commands, adjust the 80% pattern to the reference level. 3. Using the MSET0003 command, write down the adjustment values. [Adjustment value]: As per the teaching set [LC26GA5U] Teaching set: LC26GA4U [LC32GA5U] Teaching set: LC32GA4U [Adjustment reference value] Measuring instrument: Minolta CA-210, engineering measurement instrument [26 GA5U] <table><tr><td></td><td></td><td>0.305</td><td>Adjust. spec.</td><td>Insp. spec.</td></tr><tr><td>(80% gradation)</td><td>x=0.295</td><td></td><td>±0.0004</td><td>±0.0015</td></tr><tr><td>(30% gradation)</td><td></td><td></td><td>±0.001</td><td>±0.0035</td></tr><tr><td></td><td>0.276</td><td>0.283</td><td></td><td></td></tr></table> [32 GA5U] <table><tr><td></td><td></td><td>0.305</td><td>Adjust. spec.</td><td>Insp. spec.</td></tr><tr><td>(80% gradation)</td><td>x=0.295</td><td></td><td>±0.0004</td><td>±0.0015</td></tr><tr><td>(30% gradation)</td><td></td><td></td><td>±0.001</td><td>±0.0035</td></tr><tr><td></td><td>0.276</td><td>0.283</td><td></td><td></td></tr></table>						0.305	Adjust. spec.	Insp. spec.	(80% gradation)	x=0.295		±0.0004	±0.0015	(30% gradation)			±0.001	±0.0035		0.276	0.283					0.305	Adjust. spec.	Insp. spec.	(80% gradation)	x=0.295		±0.0004	±0.0015	(30% gradation)			±0.001	±0.0035		0.276	0.283		
		0.305	Adjust. spec.	Insp. spec.																																										
(80% gradation)	x=0.295		±0.0004	±0.0015																																										
(30% gradation)			±0.001	±0.0035																																										
	0.276	0.283																																												
		0.305	Adjust. spec.	Insp. spec.																																										
(80% gradation)	x=0.295		±0.0004	±0.0015																																										
(30% gradation)			±0.001	±0.0035																																										
	0.276	0.283																																												

9. Initialization to factory settings

Caution: When initialization is performed, all user setting data including the channel settings are initialized. Be cautious when making this adjustment.

(The adjustments done in the adjustment process mode are not initialized.)

	Adjustment item	Adjustment conditions	Adjustment procedure
1	Initialization		Bring the cursor on to [INDUSTRY INIT]. Set to [ON] using [VOL] key, and press [ENTER] to execute the initialization. When the initialization is complete, the adjustment process mode screen is automatically replaced by the tuner screen. * Never shut off the power during the initialization process. The following settings are initialized in this adjustment. 1. User setting 2. Channel data (e.g. broadcast frequencies) 3. Password data 4. Operation time 5. Maker's optional setting 6. Auto installation flag 7. V-CHIP block setting

After the adjustment, cancel the adjustment process mode.

To exit the adjustment process mode, unplug the AC cord from the outlet to make a forced shutdown. (When the power was turned off with the remote controller, once unplug the AC cord and plug it again. In this case, wait 10 seconds or so before plugging.)

10. Display adjustment procedure

1. Adjusting procedure

Entering the adjustment process mode → COM BIAS adjustment

2. Entering and exiting the adjustment process mode

(1) Before entering the adjustment process mode, press the "TV RESET" button or execute the AV position RESET in the menu video adjustment.

(2) While holding down the "VOL (+)" and "CH (↘)" keys at a time, press the "POWER" key of the main unit to turn on the power. (The "VOL (-)" and "INPUT" keys should be pressed and held until the display appears.)

The letter "K" appears on the screen.

(3) Next, press the remote controller key (VOL, CH, etc.).

Multiple lines of red characters appearing on the display indicate that the unit is now in the adjustment process mode.

When you fail to enter the adjustment process mode (the display is the same as normal startup), retry the procedure.

(4) To exit the adjustment process mode after the adjustment is done, unplug the AC cord from the outlet to make a forced shutdown. (When the power was turned off with the remote controller, once unplug the AC cord and plug it again. In this case, wait 10 seconds or so before plugging.)

Caution: Use due care in handling the information described here lest your users should know how to enter the adjustment process mode. If the settings are tampered in this mode, unrecoverable system damage may result.

3. Adjustment process mode key operation table

Key	Function 1 (when on the left side of a page)	Function 2 (when changing a numeric value)
Cursor UP	Moving up by one item or moving to the previous page (when at the top)	Incrementing the adjustment value by one or executing the item (in the case of W or R item)
Cursor DOWN	Moving down by one item or moving to the next page (when at the bottom)	Decrementing the adjustment value by one or executing the item (in the case of W or R item)
Cursor RIGHT	Moving to the right by one item or moving to another page (in the case of the initial page)	Moving to the right by one item
Cursor LEFT	Moving to the left by one item or moving to another page (in the case of the initial page)	Moving to the left by one item
ENRER	test pattern off	Executing the item (in the case of W or R item)
INPUT	Moving to the next page	Moving to the next page
CH_UP	Moving up by one item or moving to the previous page (when at the top)	Incrementing the adjustment value by one or executing the item (in the case of W or R item)
CH_DOWN	Moving down by one item or moving to the next page (when at the bottom)	Decrementing the adjustment value by one or executing the item (in the case of W or R item)
VOL_UP	Moving to the right by one item or moving to another page (in the case of the initial page)	Moving to the right by one item
VOL_DOWN	Moving to the left by one item or moving to another page (in the case of the initial page)	Moving to the left by one item

4. COM BIAS adjustment

Shift to the [COM BIAS] item with the cursor UP/DOWN key and select a numeric value with the cursor RIGHT/LEFT key.

Changing the numeric value with the cursor UP/DOWN key will make appear the test pattern. Make an adjustment so that the flicker near the center of the screen is minimized.

Adjusting procedure by use of [RS-232C]

- Get ready the PC with COM port (RS-232C) running on Windows 95/98/ME/2000/XP operating system, as well as the RS-232C cross cable.
- Start the unit with the RS-232C cable connected.
- Start the terminal software. (The freeware readily available on the Internet will do.)
- Make the following settings.
 Baud rate 9600
 Data 8 bits
 Parity None
 Stop bit 1 bit
 Flow control Not implemented
- If the settings are correct, the terminal software indicates "ERR" against pressing of the "ENTER" key.
- After the settings are done correctly, it is possible to make an adjustment by typing in the command shown in the table below and pressing the "ENTER" key on the keyboard.

Command entry is successful if the terminal software indicates "OK" when the "ENTER" is pressed.
If "ERR" is shown, retry to enter the command.

RS232C command table

Command	Function	Remarks
MSET1001	Starting the white balance adjustment	Ending the adjustment with a numeric value other than 1001
MOFR****	Adjusting the R GAMMA L value	Range: 0000~0255
MOFG****	Adjusting the G GAMMA L value	Range: 0000~0255
MOFB****	Adjusting the B GAMMA L value	Range: 0000~0255
MGAR****	Adjusting the R GAMMA H value	Range: 0000~0255
MGAG****	Adjusting the G GAMMA H value	Range: 0000~0255
MGAB****	Adjusting the B GAMMA H value	Range: 0000~0255
MINF0000	Displaying the R GAMMA table	
MINF0001	Displaying the G GAMMA table	
MINF0002	Displaying the B GAMMA table	

5. Lamp error detection

5-1. Feature description

This liquid-crystal color TV incorporates a lamp error detection feature (lamp error detection) that automatically turns OFF the power for safety under abnormal lamp or lamp circuit conditions.

If anything is wrong with the lamp or lamp circuit or when the lamp error detection feature is activated for some reason, the following will result.

- ① The power of TV main body is turned OFF about six seconds after it is turned ON. (The power LED on the front of the TV turns red from green and keeps blinking in red (ON for 240ms and OFF for 1sec)).
- ② If occurs five times consecutively, it becomes impossible to turn ON the power. (The power LED keeps blinking in red (ON for 240ms and OFF for 1sec)).

5-2. Measures

1) Checking with lamp error detection OFF

While the POWER switch is off, hold down the "CH (✓)" and "VOL (+)" keys and then turn the POWER switch on. The display will run in the "Display process mode" ("<K>" will appear).

If there is a problem with a lamp or a lamp circuit, the lamp will go out. (The power LED is green.)

Then, you can check the operation to see if the lamp and lamp circuit are abnormal.

2) Resetting the lamp error count

After you have finished checking whether the lamp and lamp circuit are abnormal, reset the lamp error count. If a lamp error is detected five consecutive times, the power cannot be turned on.

Therefore, move to the [L ERR RESET] line, the 5th line on the first page of the "Display process mode", using the Cursor UP/DOWN key. Then, reset the [L ERR RESET] value using the Cursor RIGHT/LEFT key. In this case, press the Cursor UP/DOWN key to reset it to "0".

Table of contents of adjustment process mode Page 0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	S	E	R	V	I	C	E		I		2	6	G	A	5	
1	→	G	R	A	Y	L	E	V	E	L		1	0	0		
2		C	O	M	B	I	A	S				2	0	0		
3		V	L	S	B	I	A	S				0	4	1		
4		L		E	R	R		R	E	S	E	T		5		
5		L	C	D												
6		P	A	T	T	E	R	N								
7		M	O	T	O	R		A	N	D		F	A	N		
8		O	T	H	E	R										
9			V	E	R		M	2	0	3						

} Values specific to each display

← Reset to "0 "

After resetting to "0", perform an operational check to ensure that the lamp error detection feature is not activated.

6. List of adjustment process modes (Display) (Examples)

Table of contents of adjustment process mode Page0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	S	E	R	V	I	C	E		I		2	6	G	A	5	
1	→	G	R	A	Y	L	E	V	E	L		1	0	0		
2		C	O	M	B	I	A	S				2	0	0		
3		V	L	S	B	I	A	S				0	4	1		
4		L		E	R	R		R	E	S	E	T		0		
5		L	C	D												
6		P	A	T	T	E	R	N								
7		M	O	T	O	R		A	N	D		F	A	N		
8		O	T	H	E	R										
9			V	E	R		M	2	0	3						

LCD Page 1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	L	C	D	1						0				
1	→	M	O	D	E						P	C		0
2		P	W	M	C	T	R	L						3
3		P	W	M	F	R	E	Q			1	2	7	9
4		P	W	M	D	U	T	Y	1		0	1	1	6
5		P	W	M	D	U	T	Y	2		0	1	1	6
6		P	H	A	S	E	D	I	F			0	0	0
7		P	C	L	K	1								0
8		P	C	L	K	2								0
9														

LCDPage 2

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	L	C	D	2						0				
1	→	M	O	D	E						P	C		0
2		Q	S		S	W						1		
3		Q	S		D	1						0	8	4
4		Q	S		D	2						0	9	6
5		Q	S		D	3						1	0	6
6		Q	S		D	4						1	1	8
7		Q	S		D	5						1	3	2
8		Q	S		D	6						1	4	7
9		Q	S		D	7						1	6	2

LCD Page 3

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	L	C	D	3										
1	→	O	P	C		0							0	0
2		O	P	C		1							0	5
3		O	P	C		2							0	9
4		O	P	C		3							1	3
5		O	P	C		4							1	8
6		O	P	C		5							2	2
7		O	P	C		6							2	7
8		O	P	C		7							3	1
9		O	P	C		8							3	6

LCD Page 4

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	L	C	D	4										
1	→	O	P	C			9						4	0
2		O	P	C		1	0						4	5
3		O	P	C		1	1						4	9
4		O	P	C		1	2						5	3
5		O	P	C		1	3						5	8
6		O	P	C		1	4						6	2
7		O	P	C		1	5						6	2
8		O	P	C		1	6						7	4
9														

LCD Page 5

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	L	C	D	5										
1	→	V	H	0							0	1	6	6
2		V	L	0							0	9	4	1
3		V	H	3	1						0	4	1	7
4		V	L	3	1						0	6	9	4
5		V	H	6	3						0	4	7	3
6		V	L	6	3						0	6	2	1
7		V	H	9	5						0	5	0	9
8		V	L	9	5						0	5	0	3
9														

LCD Page 6

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	L	C	D	6										
1	→	V	L	1	2	7					0	5	3	5
2		V	L	1	2	7					0	5	5	0
3		V	H	1	5	9					0	5	8	1
4		V	L	1	5	9					0	4	9	5
5		V	H	1	9	1					0	6	2	7
6		V	L	1	9	1					0	4	4	3
7		V	H	2	4	7					0	7	9	5
8		V	L	2	4	7					0	1	5	3
9														

PATTERN Page1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	P	A	T	T	E	R	N	1						
1	→	P	A	T	T	E	R	N	1				0	0
2		P	A	T	T	E	R	N	2				0	0
3		P	A	T	T	E	R	N	3				0	0
4		P	A	T	T	E	R	N	4				0	0
5														
6														
7														
8														
9														

OTHER Page 1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	O	T	H	E	R	1								
1	→	C	L	R		M	O	D	E					0
2												W	0	
3		L	C	D		D	A	T	A		0	0	0	0
4											R	0	W	0
5		E	E	P		C		0	0	0	0	0	0	0
6											R	0	W	0
7														
8														
9														

PATTERN Page 2

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	P	A	T	T	E	R	N	2						
1	→	R	E	S	E	R	V	E						0
2		R	E	S	E	R	V	E						0
3														
4														
5														
6														
7														
8														
9														

OTHER Page 2

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	O	T	H	E	R	2					2	6	G	D	1	
1	→	C		E	R	R		S	T	O	P			0		
2		M	O	D	E	L								0		
3			E	M	O	C	O	N						0		
4																
5			S	T	E	M	P		A	D		1	0	6		
6			P	C		A	D					2	0	8		

MOTOR FAN Page 1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	M	O	T	O	R				F	A	N			
1	→	R	E	S	E	R	V	E						0
2		R	E	S	E	R	V	E						0
3		R	E	S	E	R	V	E						0
4		R	E	S	E	R	V	E						0
5		R	E	S	E	R	V	E						0
6		R	E	S	E	R	V	E						0
7		F	A	N		S	T	A	R	T		2	2	4
8		F	A	N		S	T	O	P			2	3	0
9		T	E	M	P		E	R	R			0	5	5


OTHER Page 3

	0	1	2	3	4	5	6	7	8	9	A	B	C	D
0	O	T	H	E	R	3								
1	→	T	I	M	E	O	U	T		O	N			1
2		I	O	7	0		1	0	0	0	0	1	1	1
3		I	O	7	2		1	1	0	0	1	1	1	0
4			0	0	0	0	0	0	0	0	0	0	0	0
5			0	4	0	3	3	0	1	0	1	1	4	7
6		E	T	C		2	0	1	2	2	1	0	1	0
7		R	A	M		E	E	P		4	A		0	0
8		M	I	C	O	M		0	0		0	0	0	0
9														


First layer	Page	Item	Setting range	Initial value
Table of contents	1	GRAYLEVEL	0 ~ 255	25
		COM BIAS	0 ~ 255	126
		VLS BIAS	0 ~ 255	23
		L ERR RESET	Totally clear	0
LCD	1	MODE	50Hz,60Hz,PC	60Hz
		PWM CTRL	0 ~ 7	7
		PWM FREQ	0 ~ 4095	1289
		PWM DUTY1	0 ~ 4095	0
		PWM DUTY2	0 ~ 4095	0
		PHASEDIF	0 ~ 255	0
		PCLK1	0 ~ 3	0
		PCLK2	0 ~ 7	0
	2	MODE	50Hz,60Hz,PC	60Hz
		OS SW	0 ~ 1	0
		OS D1	0 ~ 255	110
		OS D2	0 ~ 255	123
		OS D3	0 ~ 255	135
		OS D4	0 ~ 255	135
		OS D5	0 ~ 255	167
		OS D6	0 ~ 255	174
		OS D7	0 ~ 255	179
	3	OPC 0	0 ~ 85	0
		OPC 1	0 ~ 85	11
		OPC 2	0 ~ 85	21
		OPC 3	0 ~ 85	30
		OPC 4	0 ~ 85	38
		OPC 5	0 ~ 85	45
		OPC 6	0 ~ 85	51
		OPC 7	0 ~ 85	56
		OPC 8	0 ~ 85	61
	4	OPC 9	0 ~ 85	66
		OPC 10	0 ~ 85	70
		OPC 11	0 ~ 85	73
		OPC 12	0 ~ 85	76
		OPC 13	0 ~ 85	79
		OPC 14	0 ~ 85	81
		OPC 15	0 ~ 85	83
		OPC 16	0 ~ 85	85
	5	VH 0	0 ~ 1023	124
		VL 0	0 ~ 1023	904
		VH 1	0 ~ 1023	359
		VL 1	0 ~ 1023	598
		VH 20	0 ~ 1023	397
		VL 20	0 ~ 1023	579
		VH 47	0 ~ 1023	416
		VL 47	0 ~ 1023	551
	6	VH 63	0 ~ 1023	454
		VL 63	0 ~ 1023	517
		VH 95	0 ~ 1023	485
		VL 95	0 ~ 1023	486
		VH 127	0 ~ 1023	538
		VL 127	0 ~ 1023	538
		VH 191	0 ~ 1023	1022
		VL 191	0 ~ 1023	122

TROUBLE SHOOTING TABLE

<Power supply>

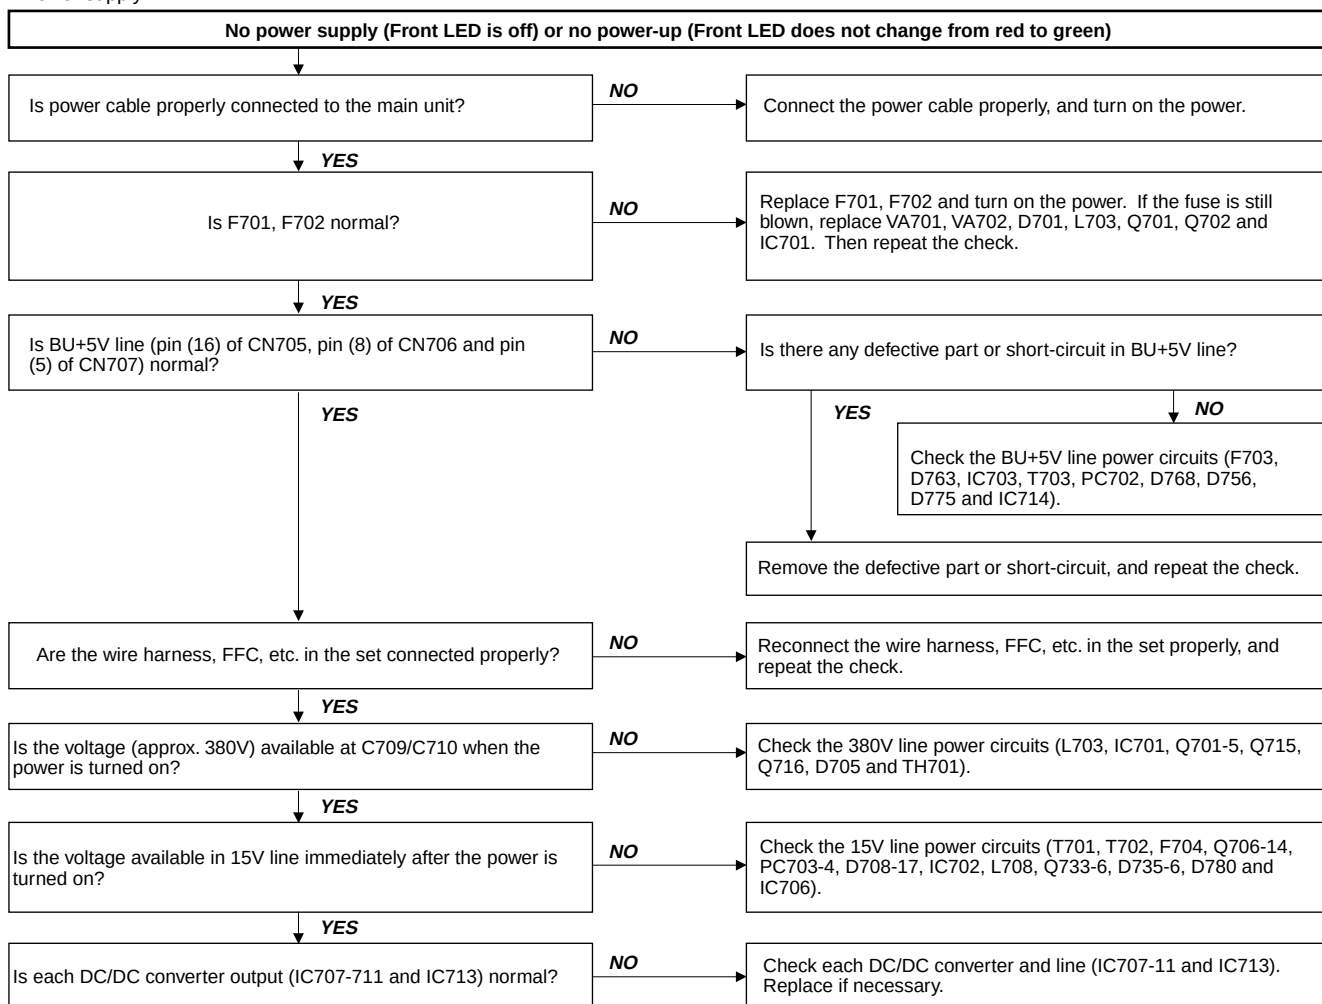

- Power switch: Top panel
- (Main) Power (DC cutoff: Detected by microprocessor)
- [Scheme of power supply system]

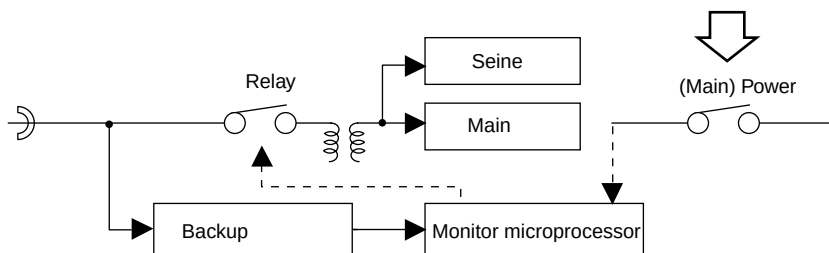


[(Main) Power OFF sequence]


- 1) (Main) Power OFF (DC switch)
- 2) (Main) Power shutoff is detected by the monitor microprocessor port.
- 3) Standby request (power cord) is sent to Seine from the microprocessor.
- 4) Seine shutdown process
- 5) Reception of shutdown permission from Seine
- 6) Monitor microcomputer turns off the relay to enter the standby mode.

TROUBLE SHOOTING TABLE (Continued)


<Signals>

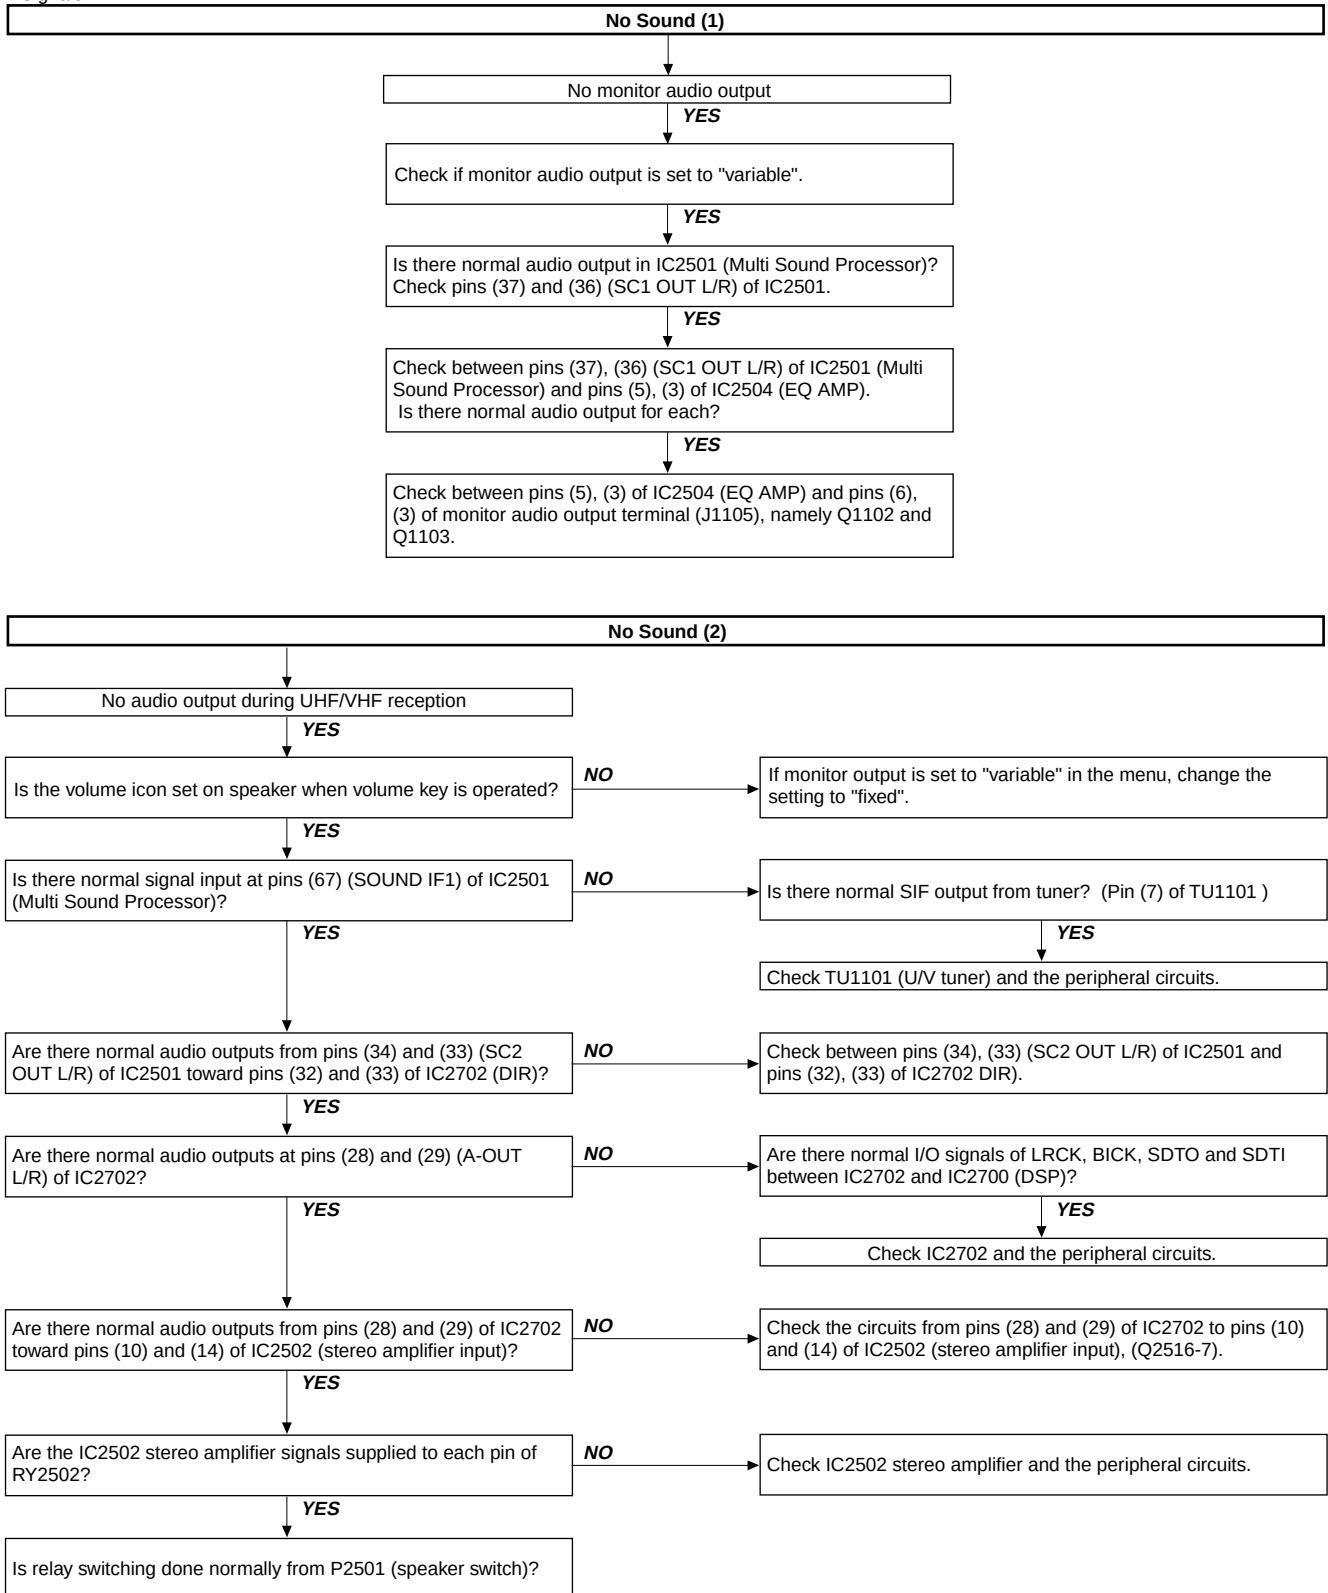

TROUBLE SHOOTING TABLE (Continued)

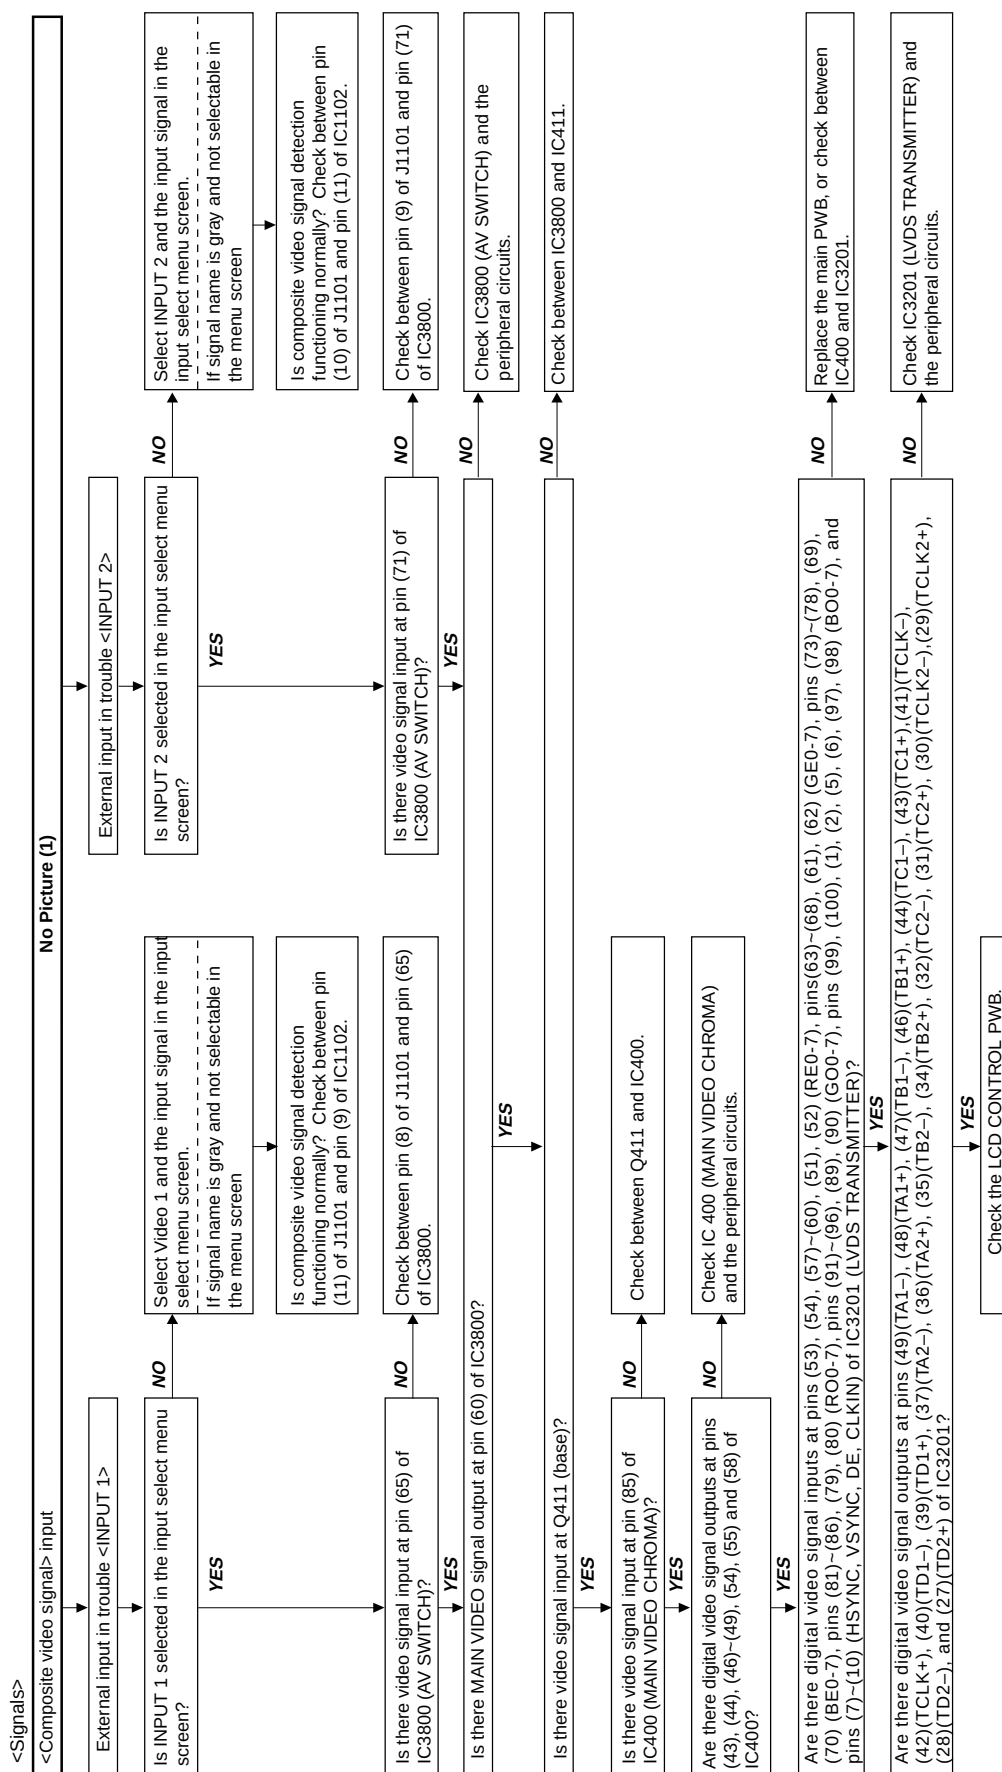


TROUBLE SHOOTING TABLE (Continued)

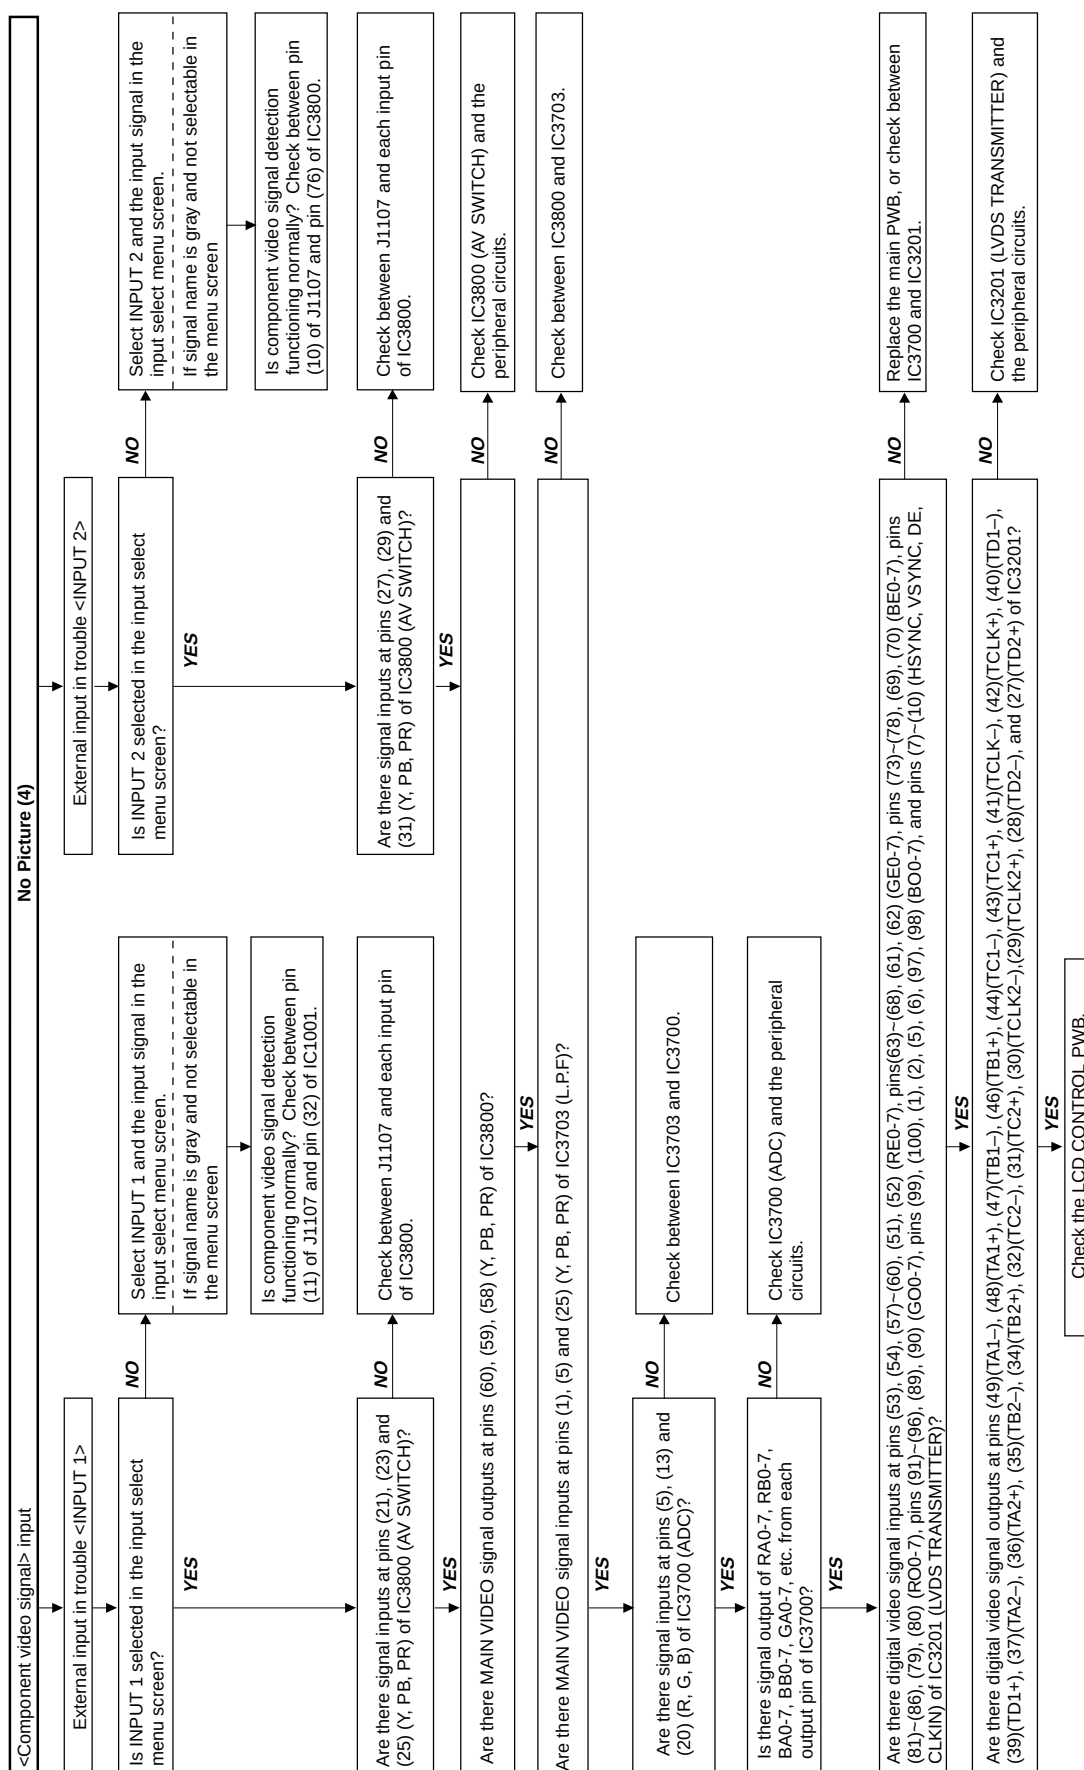


TROUBLE SHOOTING TABLE (Continued)

DVI Input (Digital PC mode)

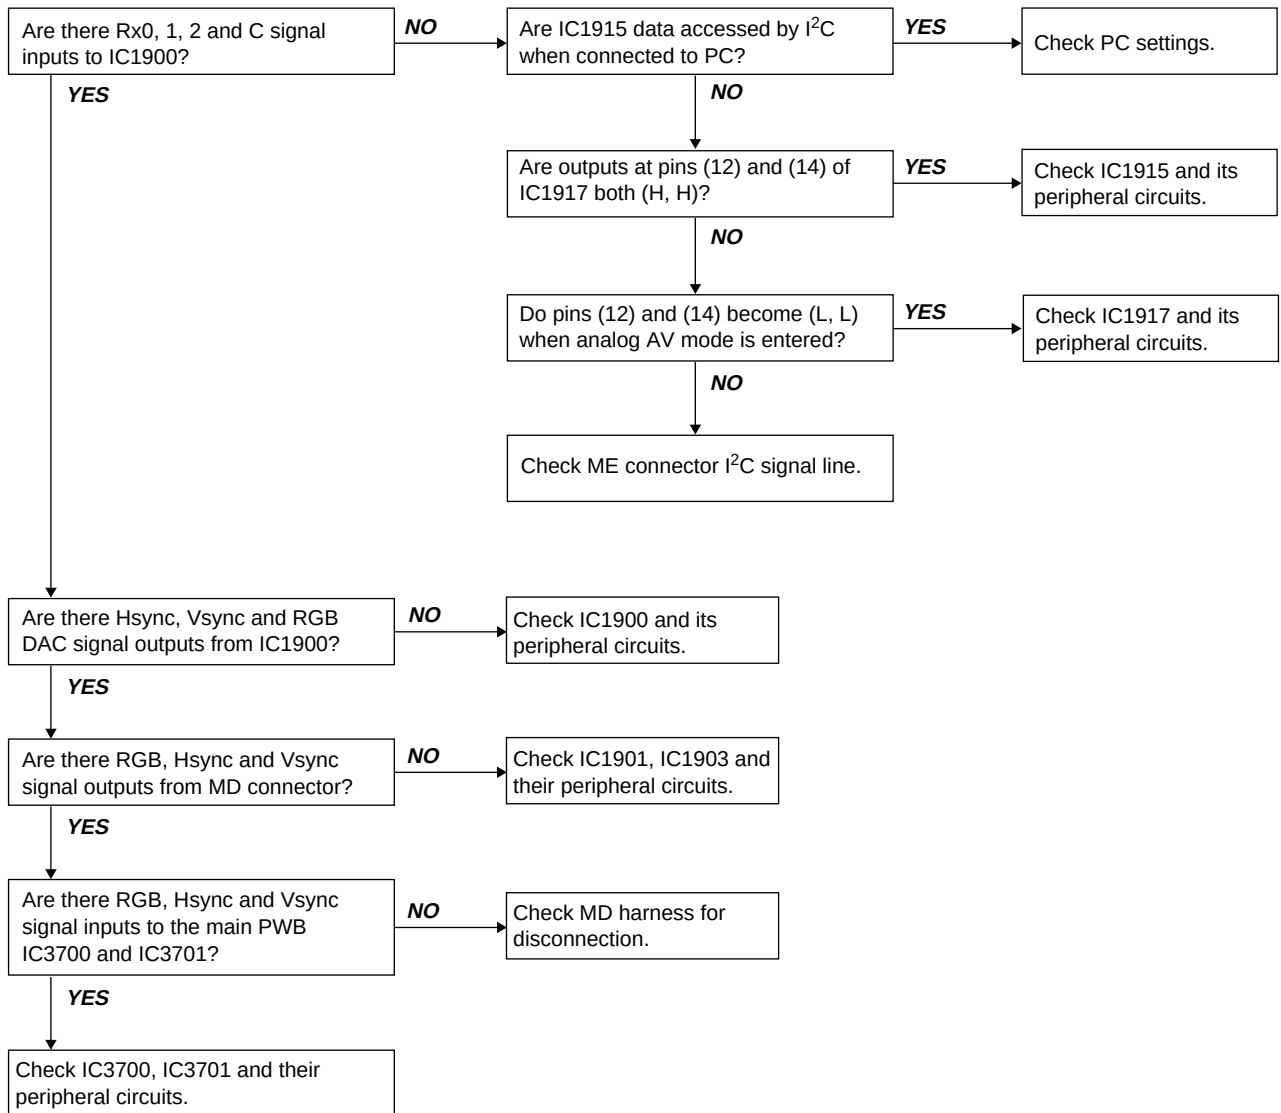


TROUBLE SHOOTING TABLE (Continued)

DVI Input (Analog PC mode)

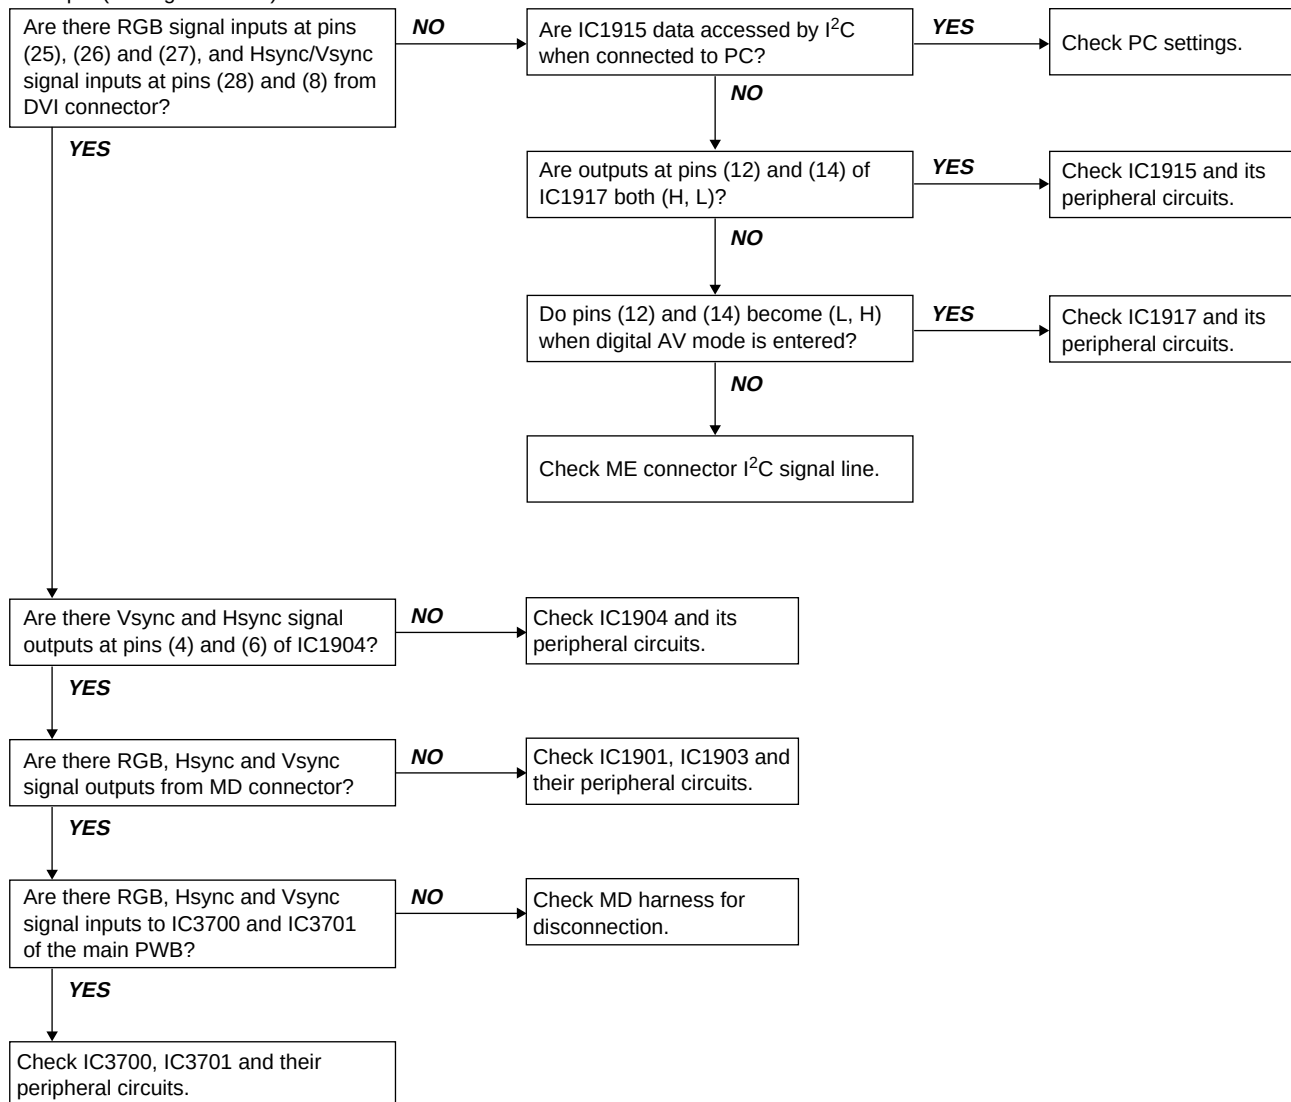


TROUBLE SHOOTING TABLE (Continued)

DVI Input (Digital AV mode)

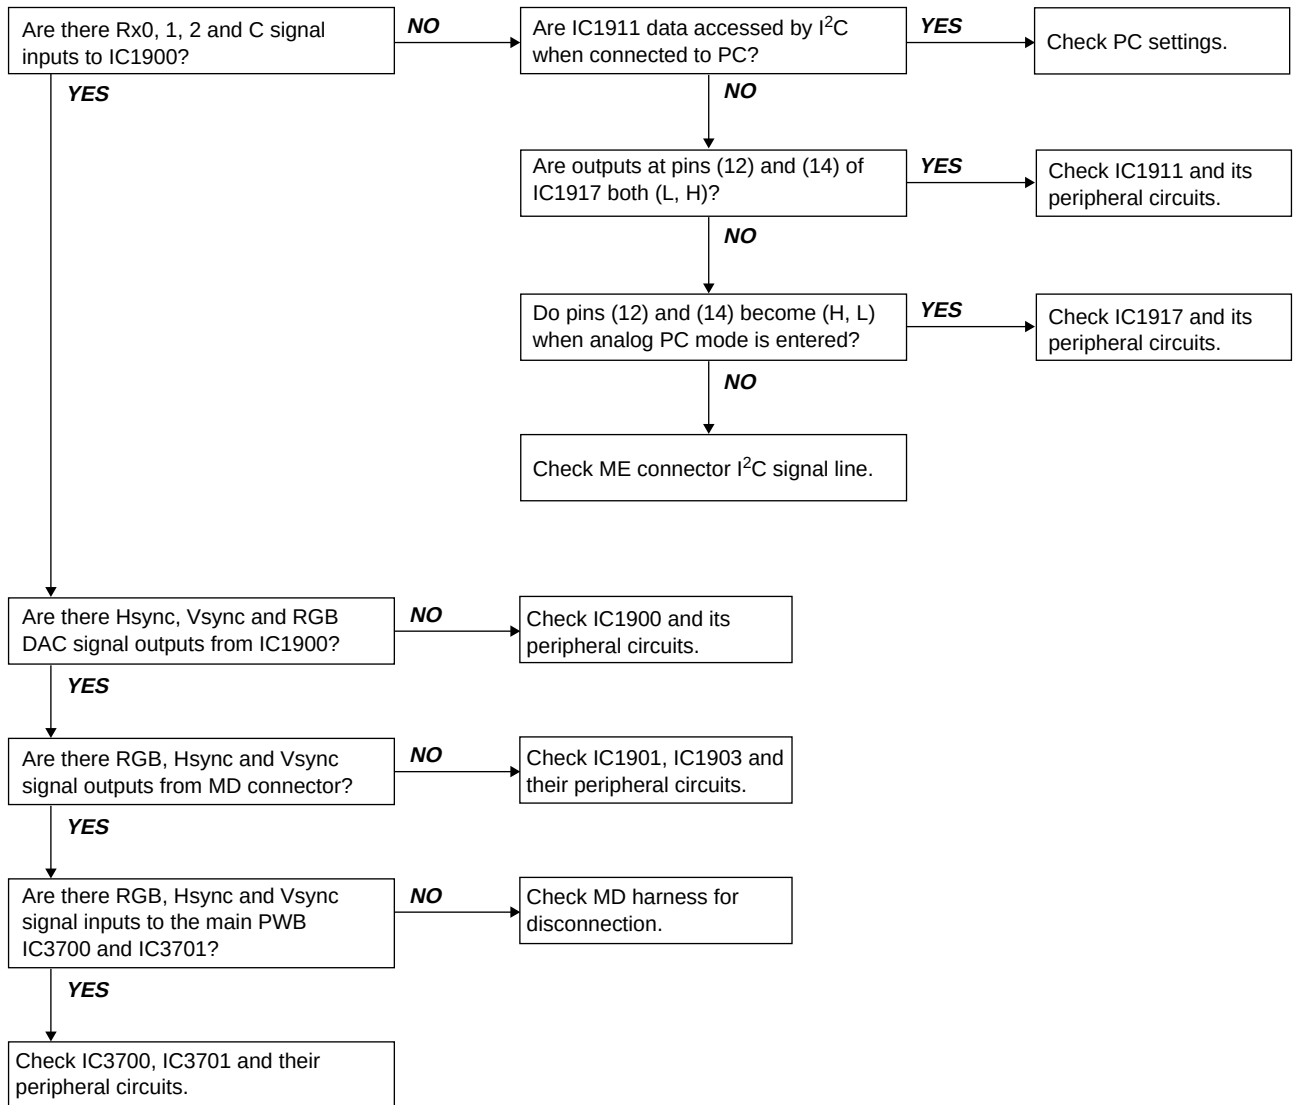


TROUBLE SHOOTING TABLE (Continued)


DVI Input (Analog AV mode)

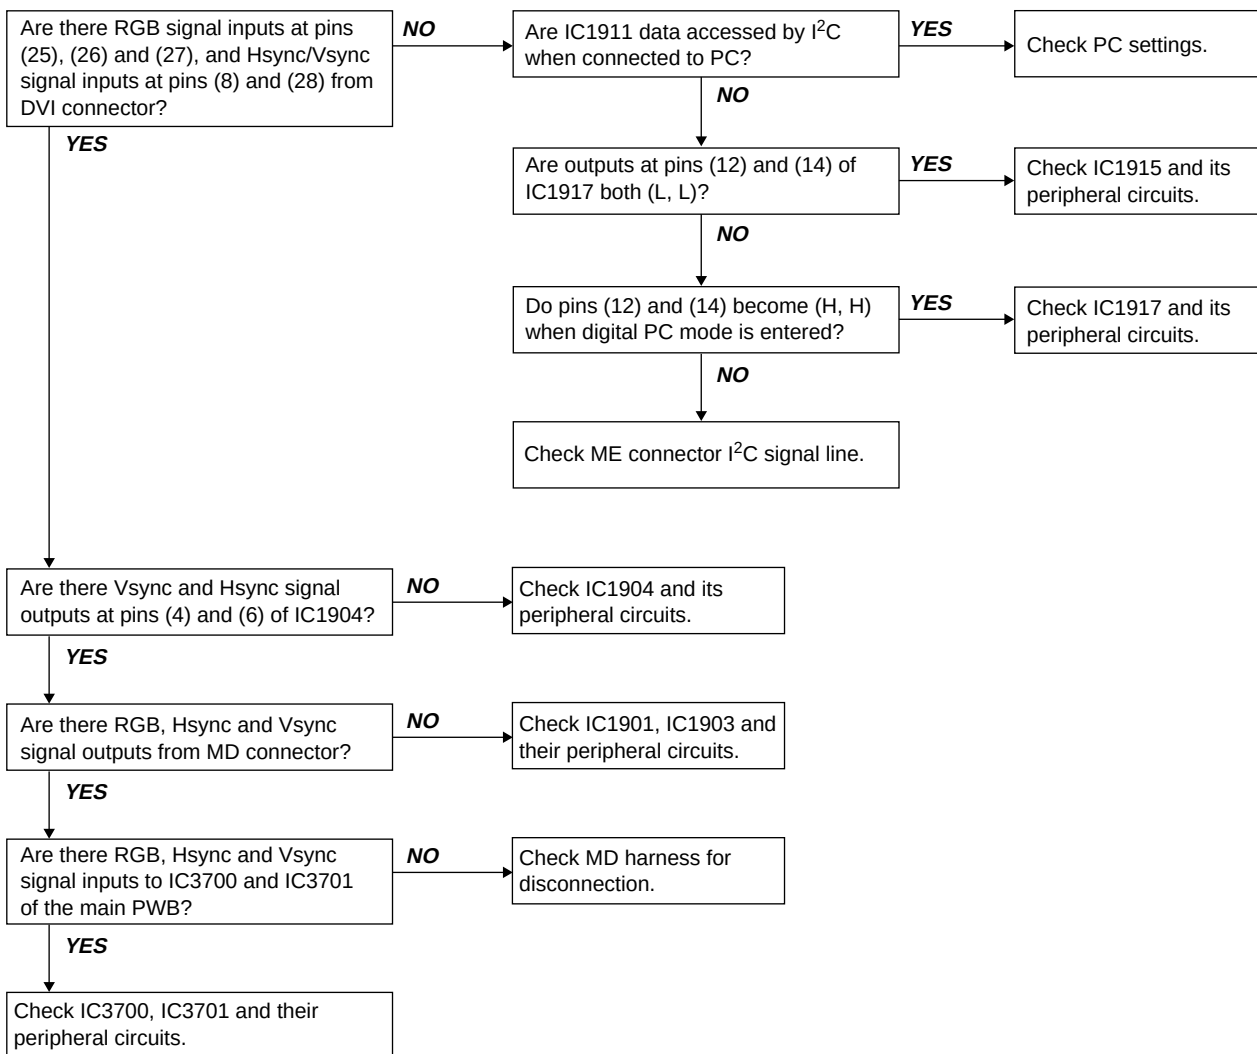


TROUBLE SHOOTING TABLE (Continued)

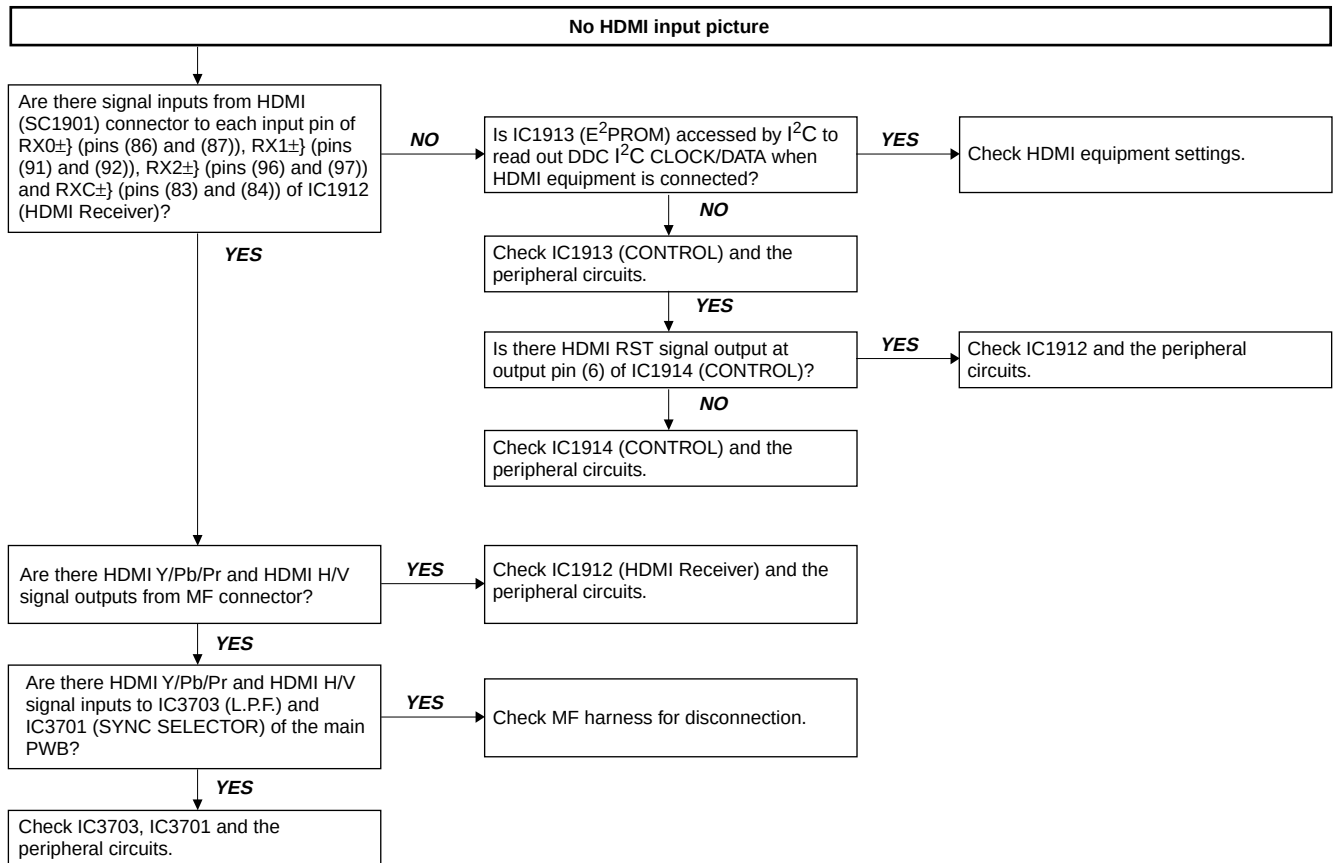


OVERALL WIRING DIAGRAM/CHASSIS LAYOUT

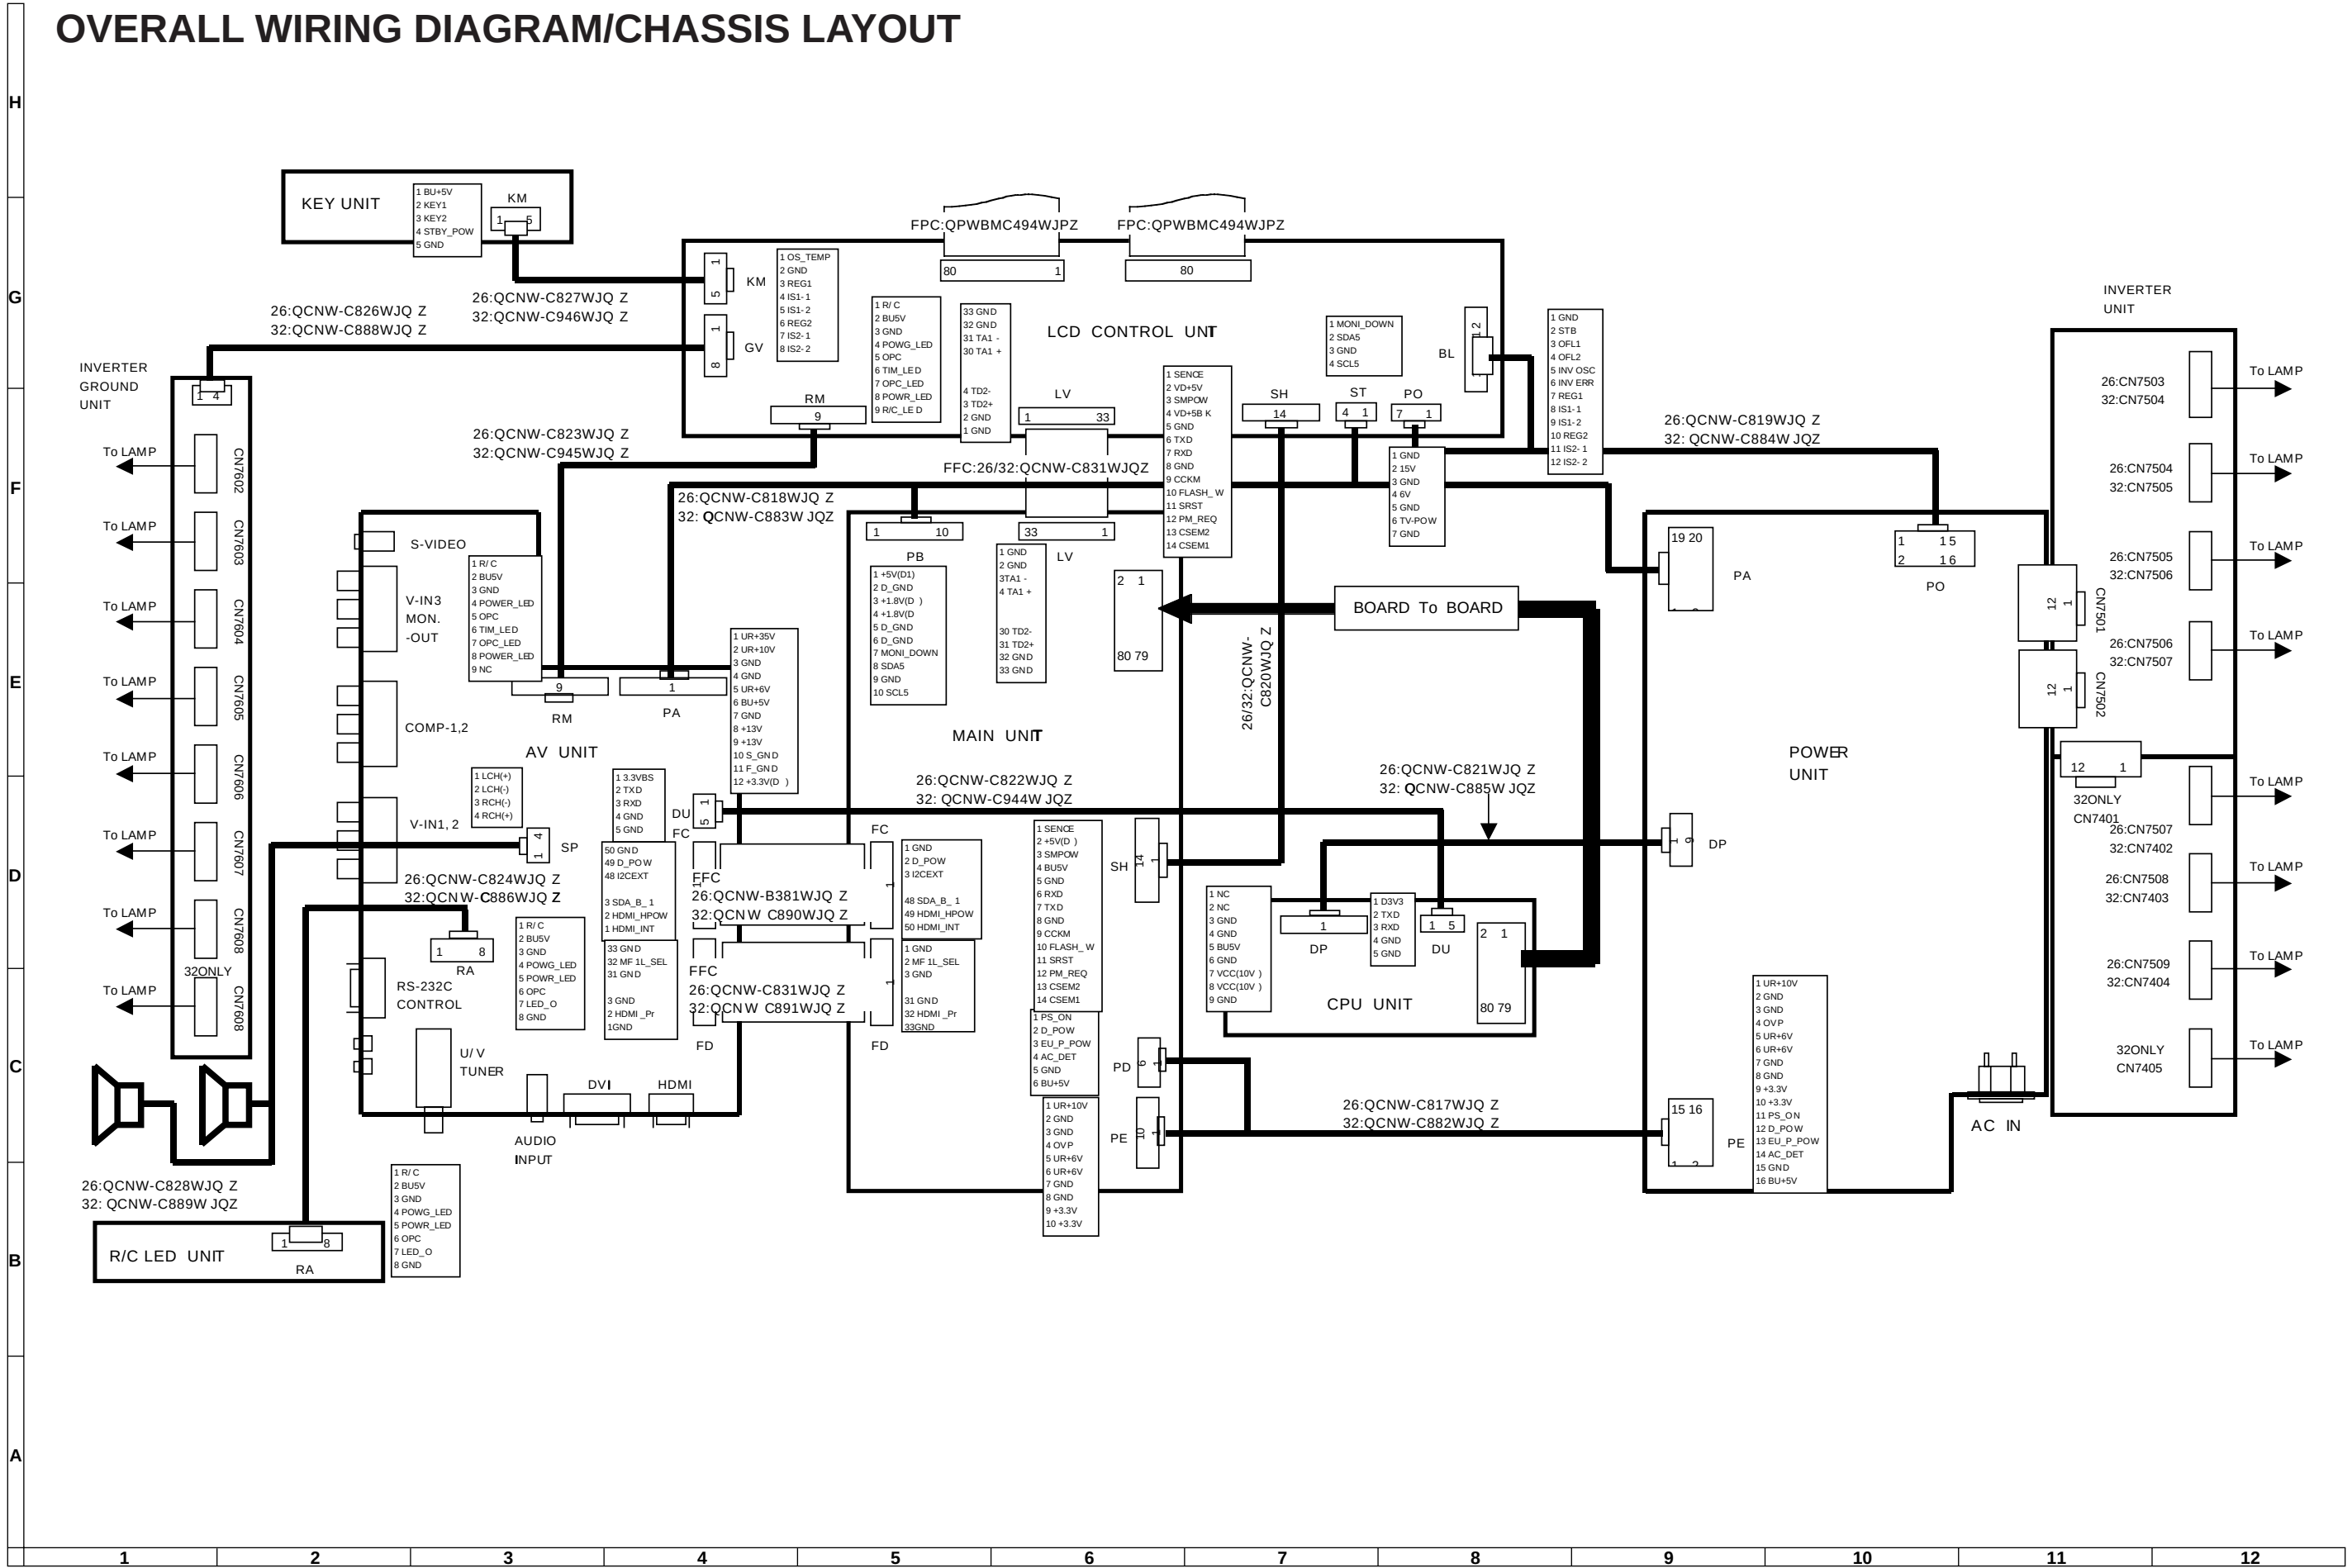


A
B
C
D
E
F
G
H




CPU BLOCK DIAGRAM

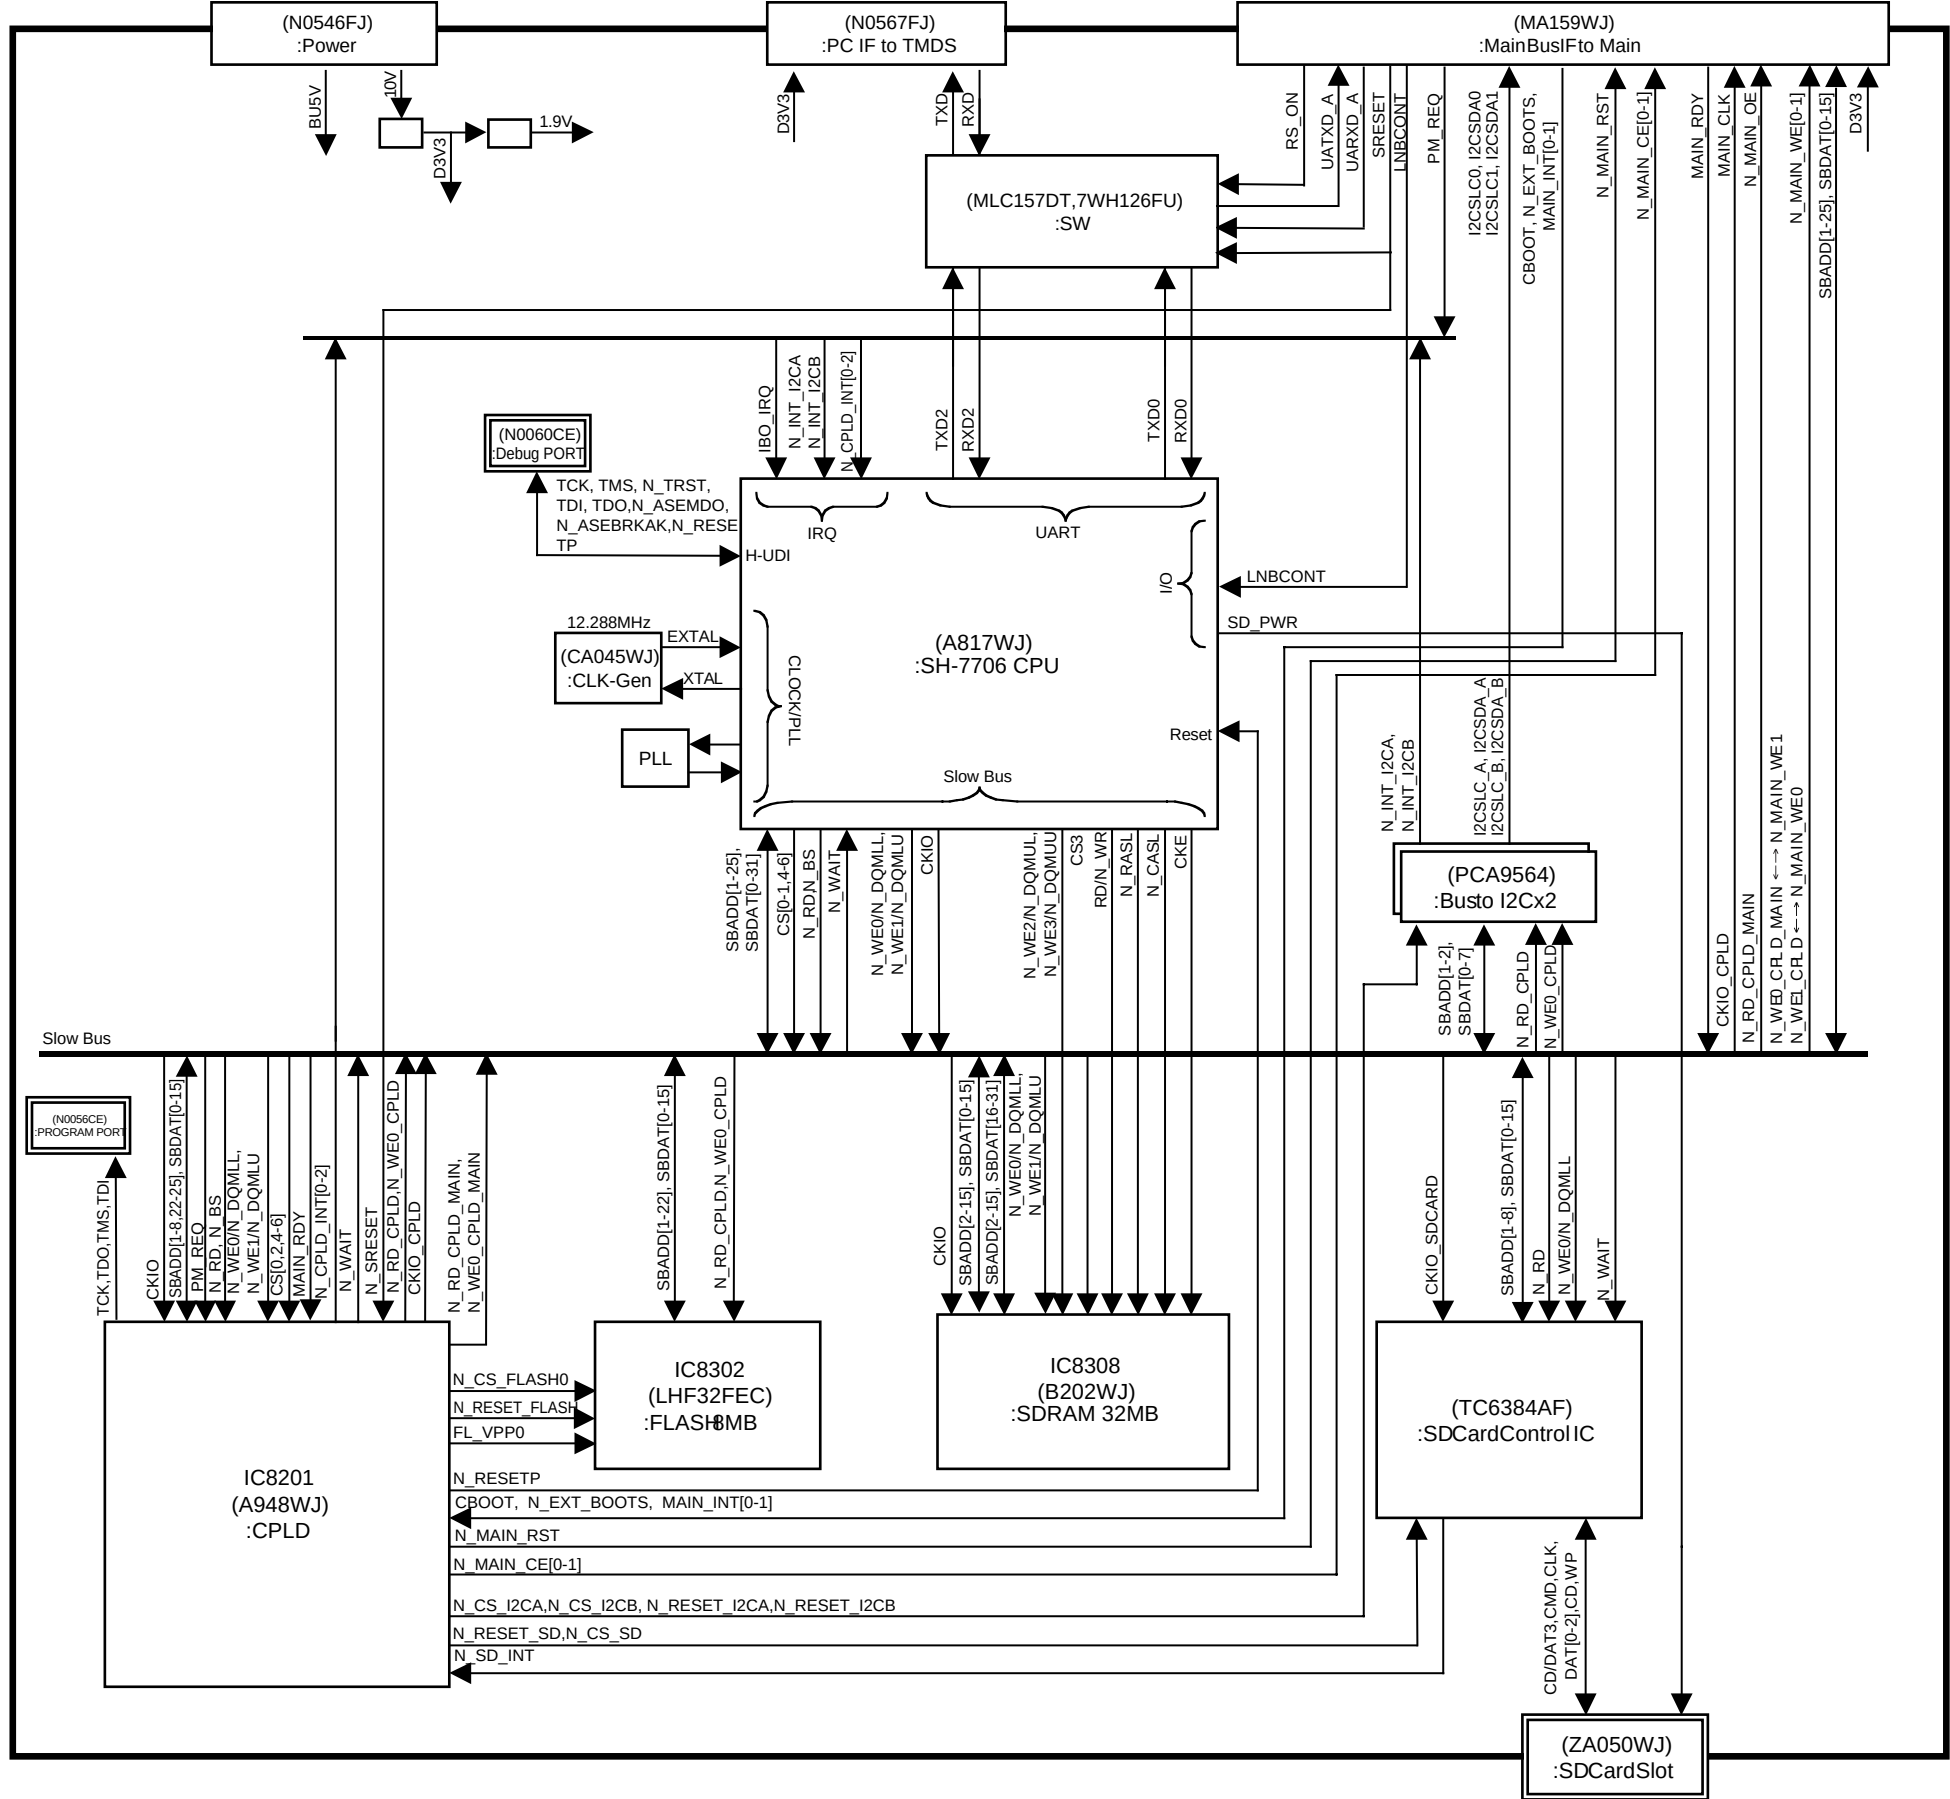


PRINTED WIRING BOARD ASSEMBLIES

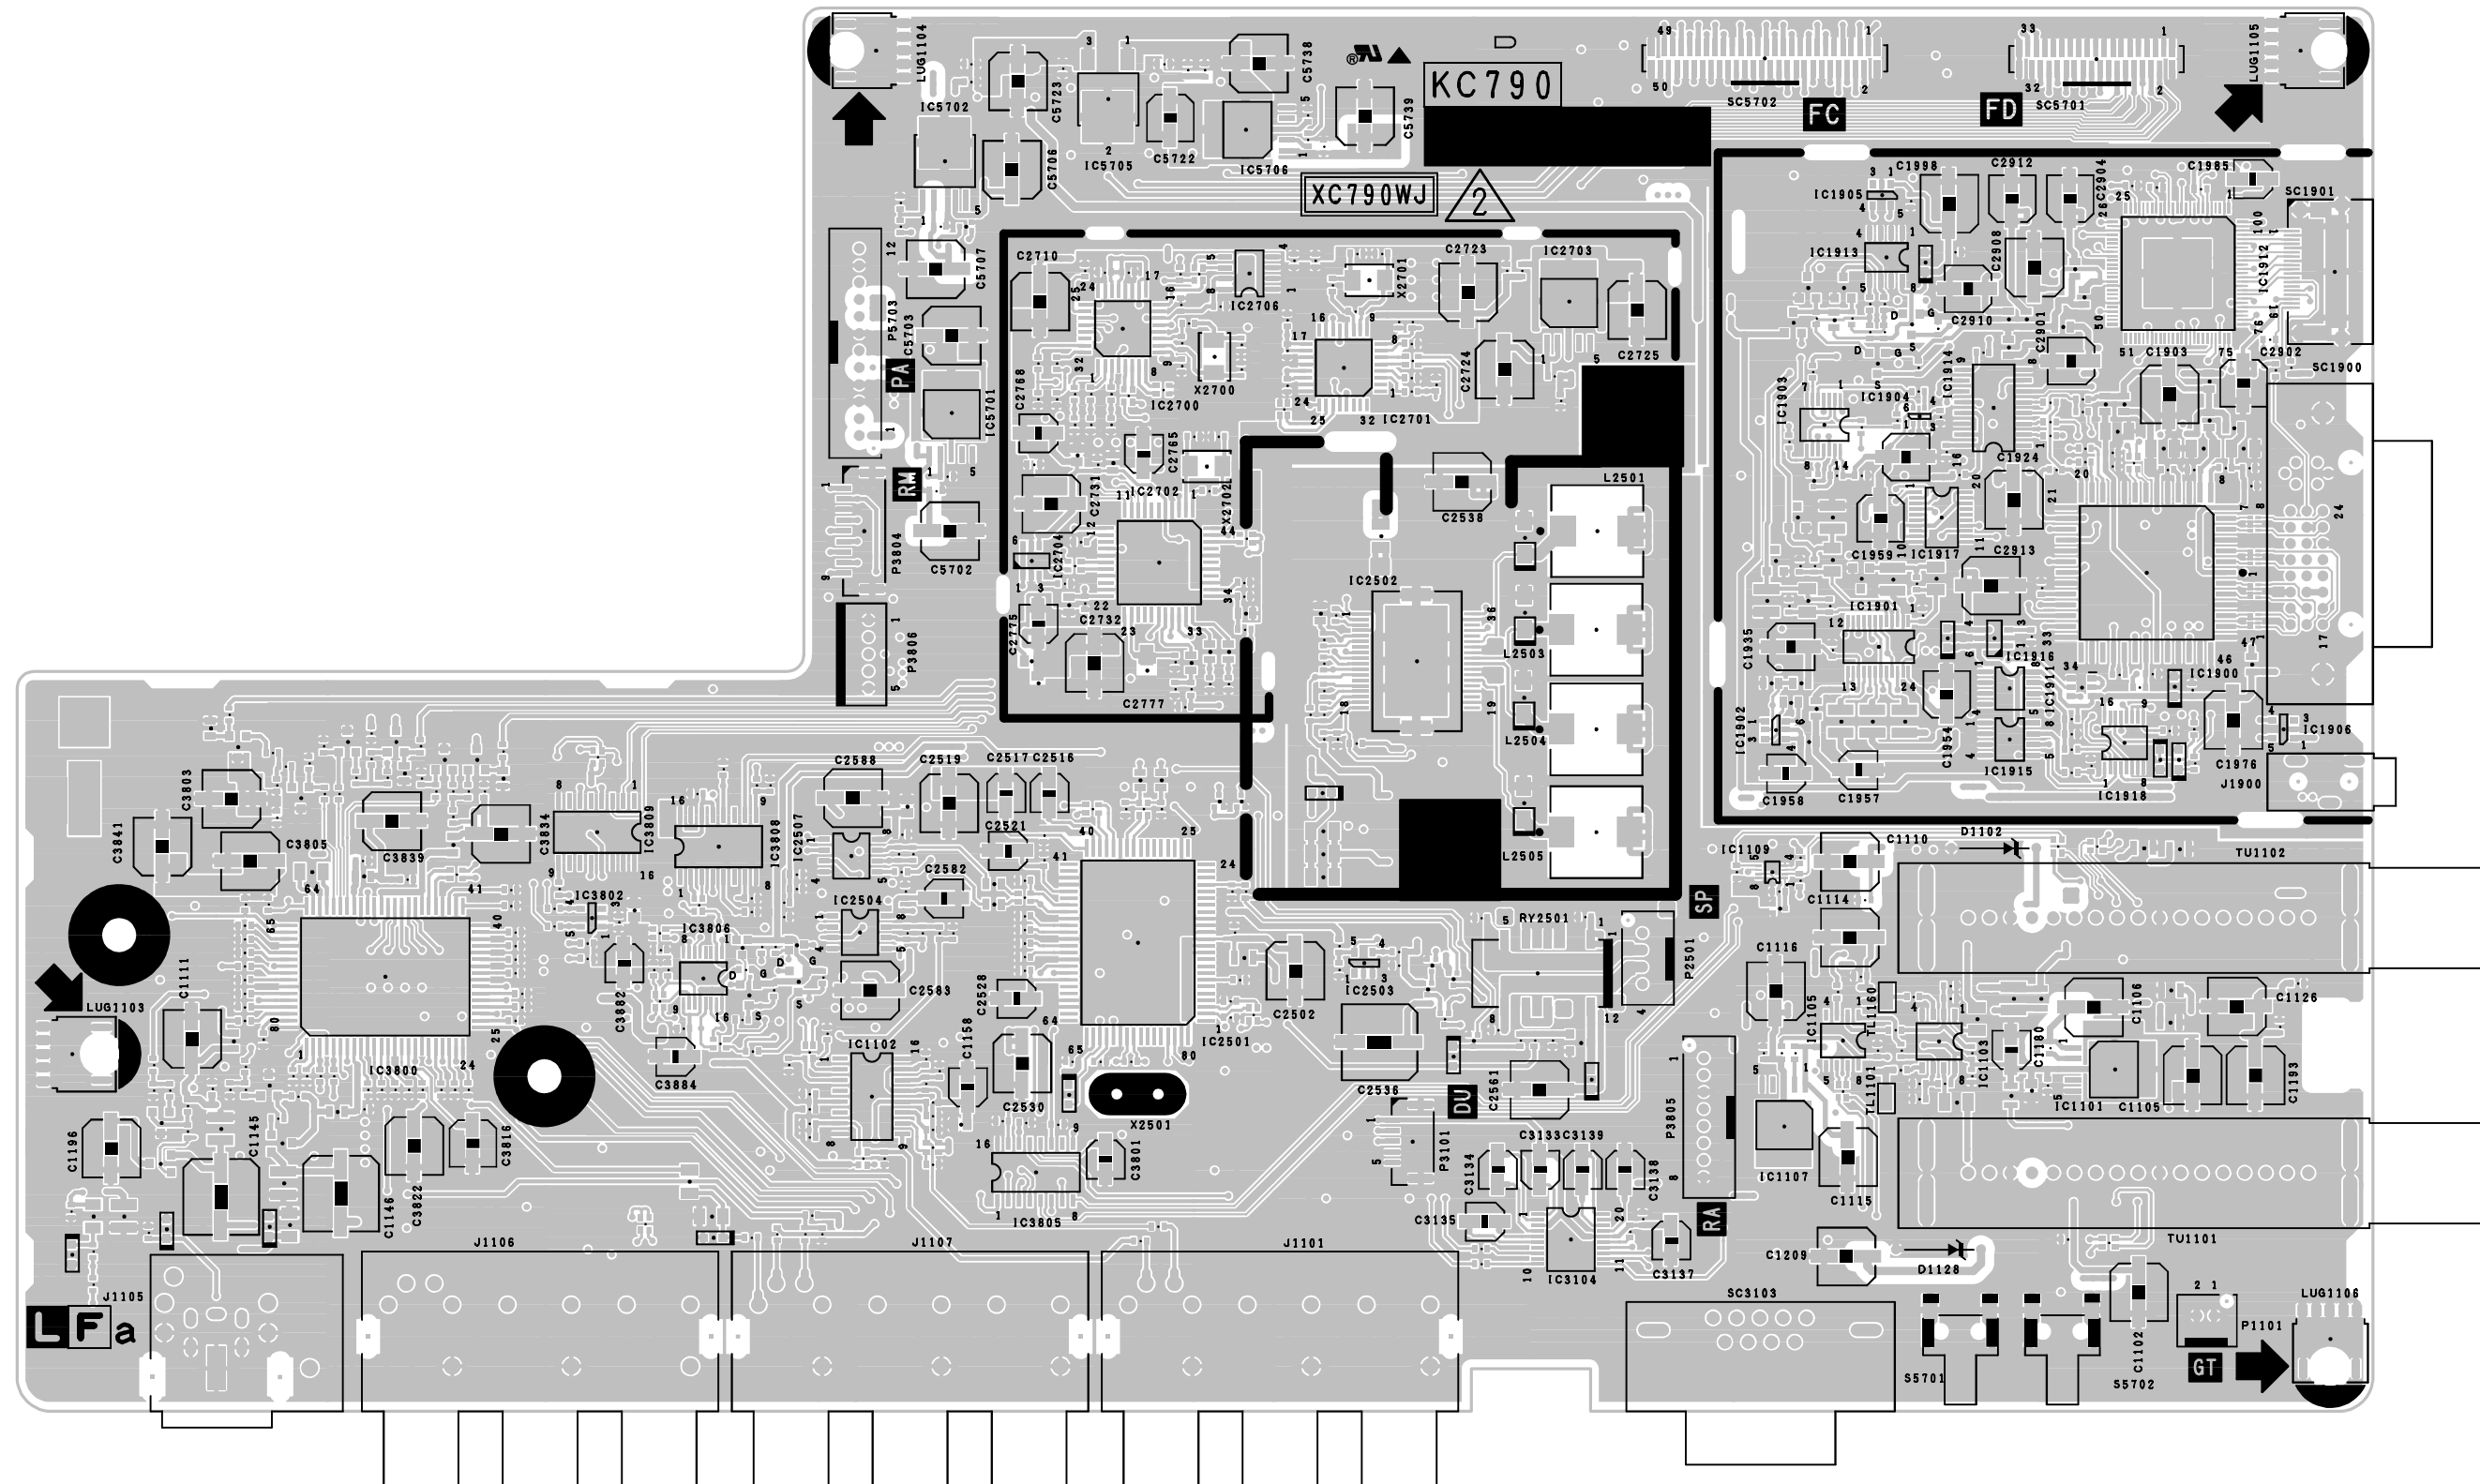


AV Unit (Side-A)

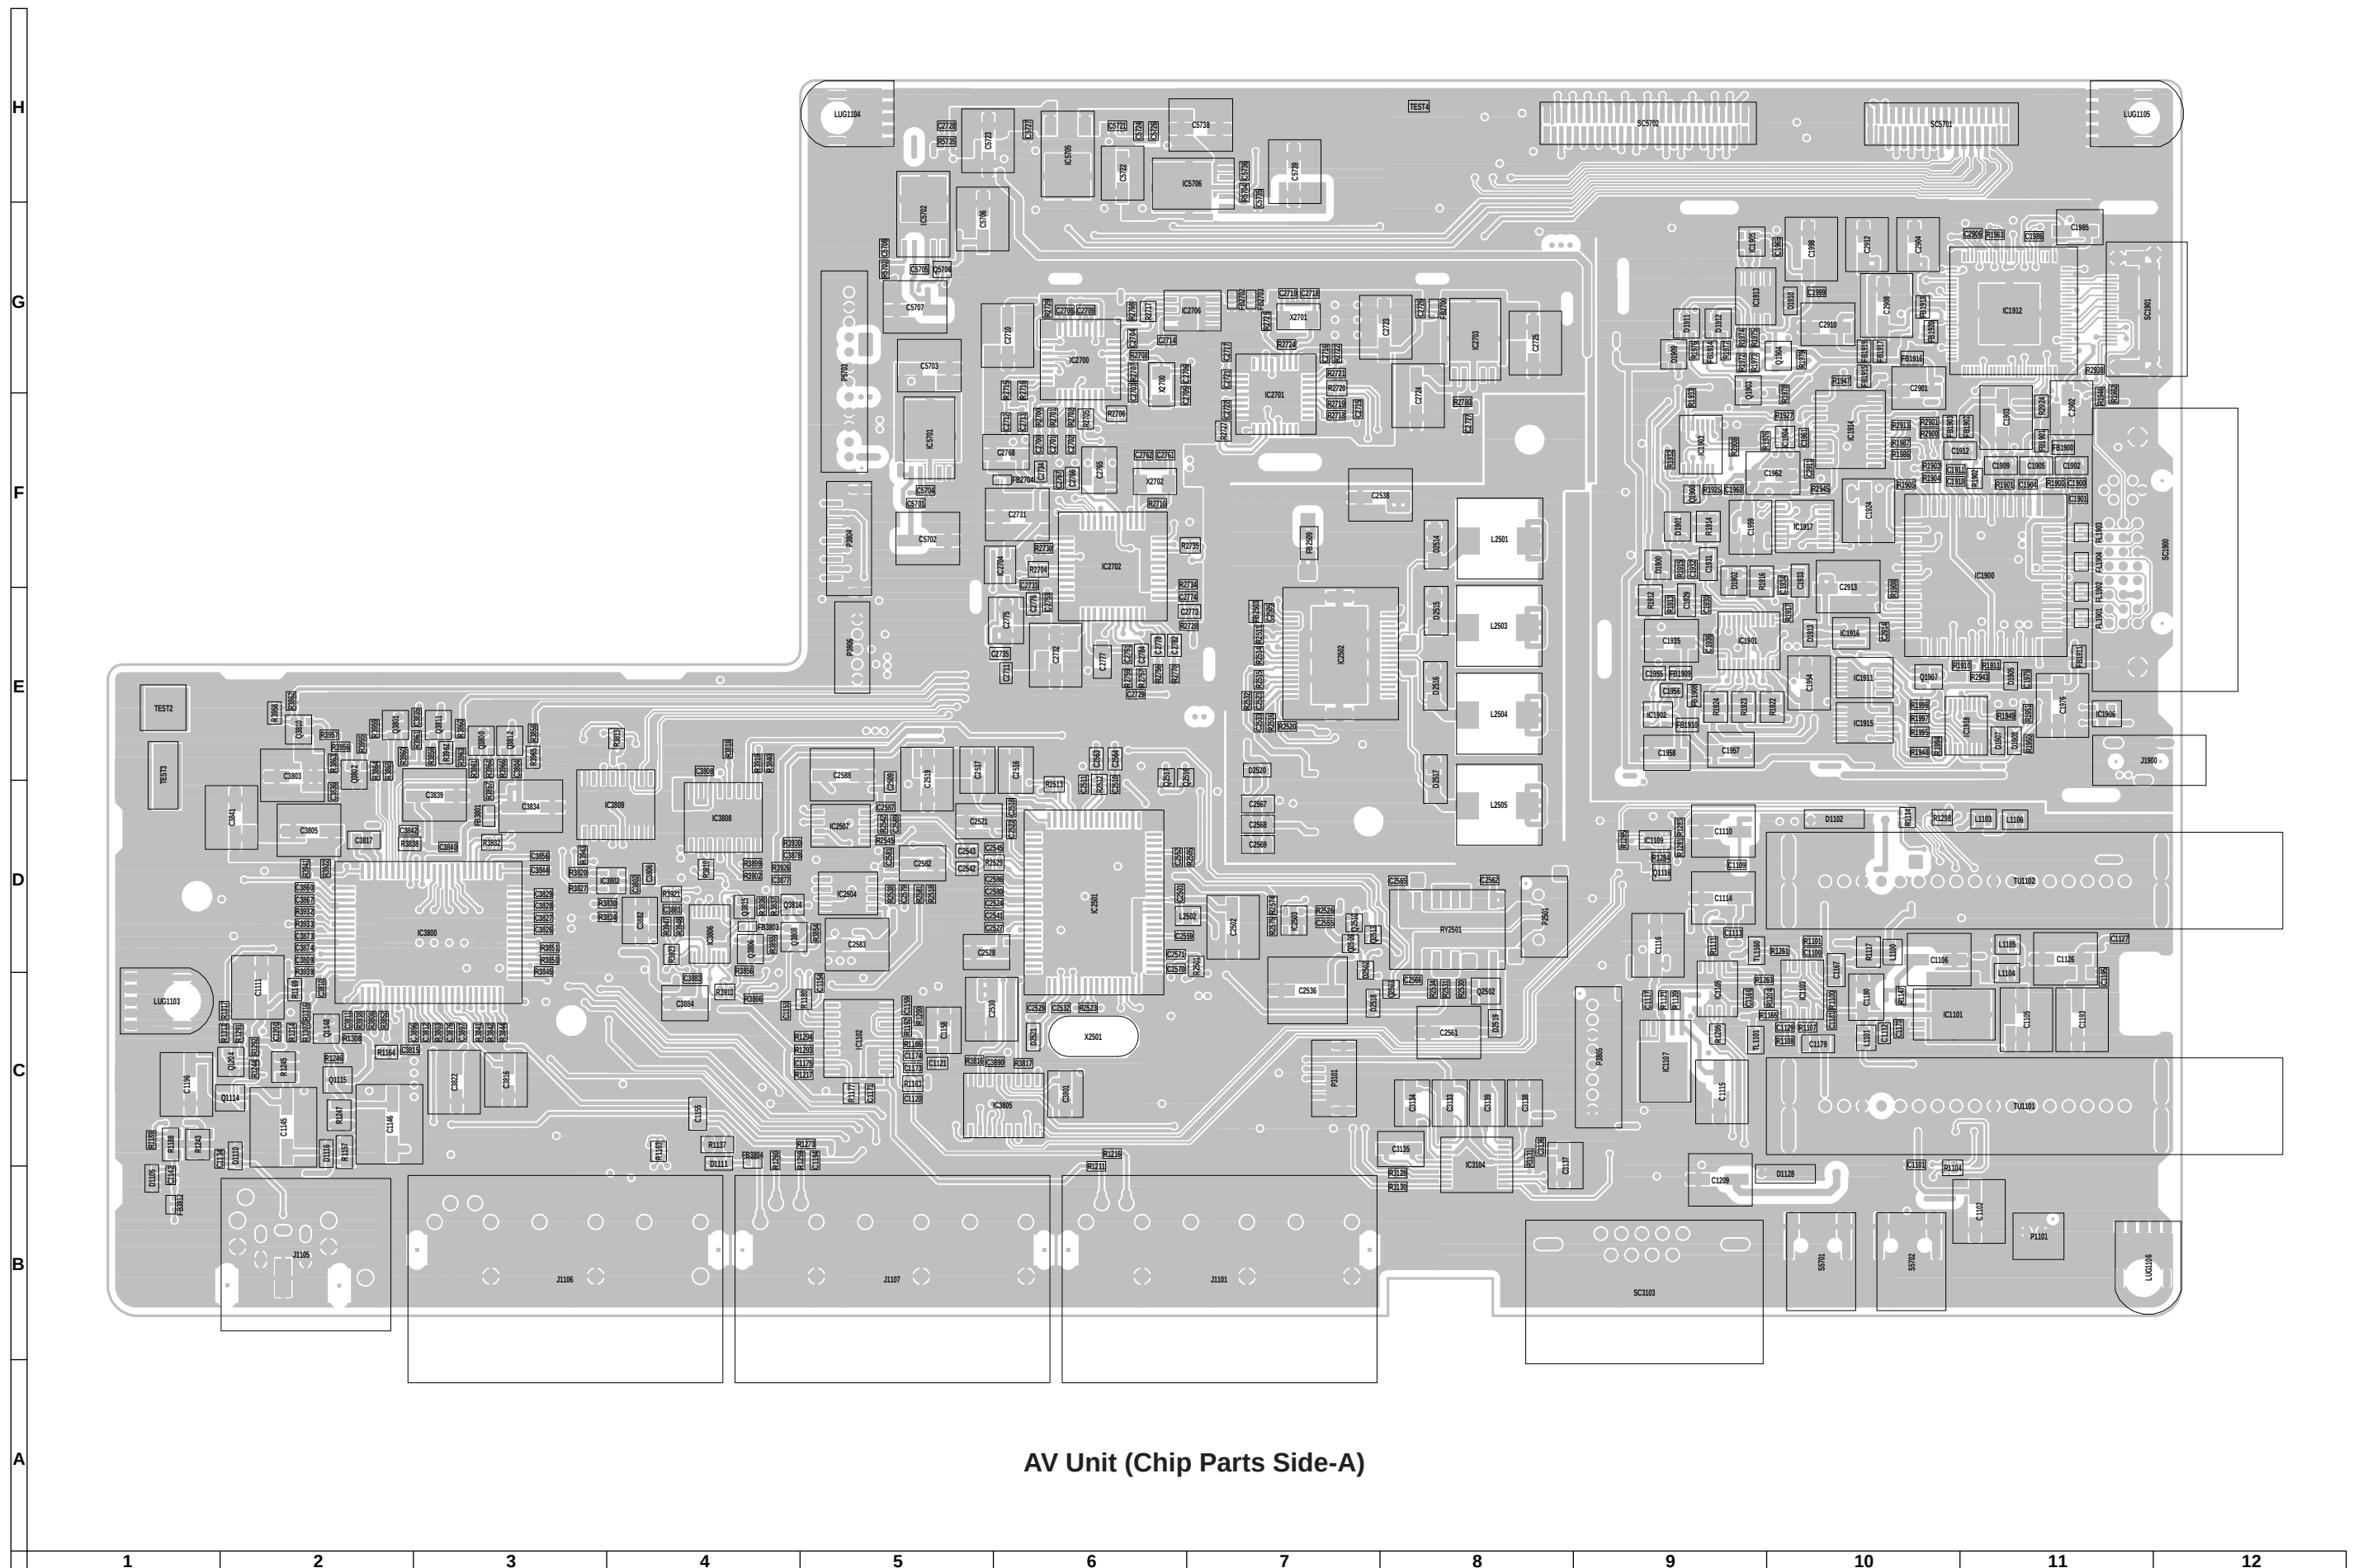


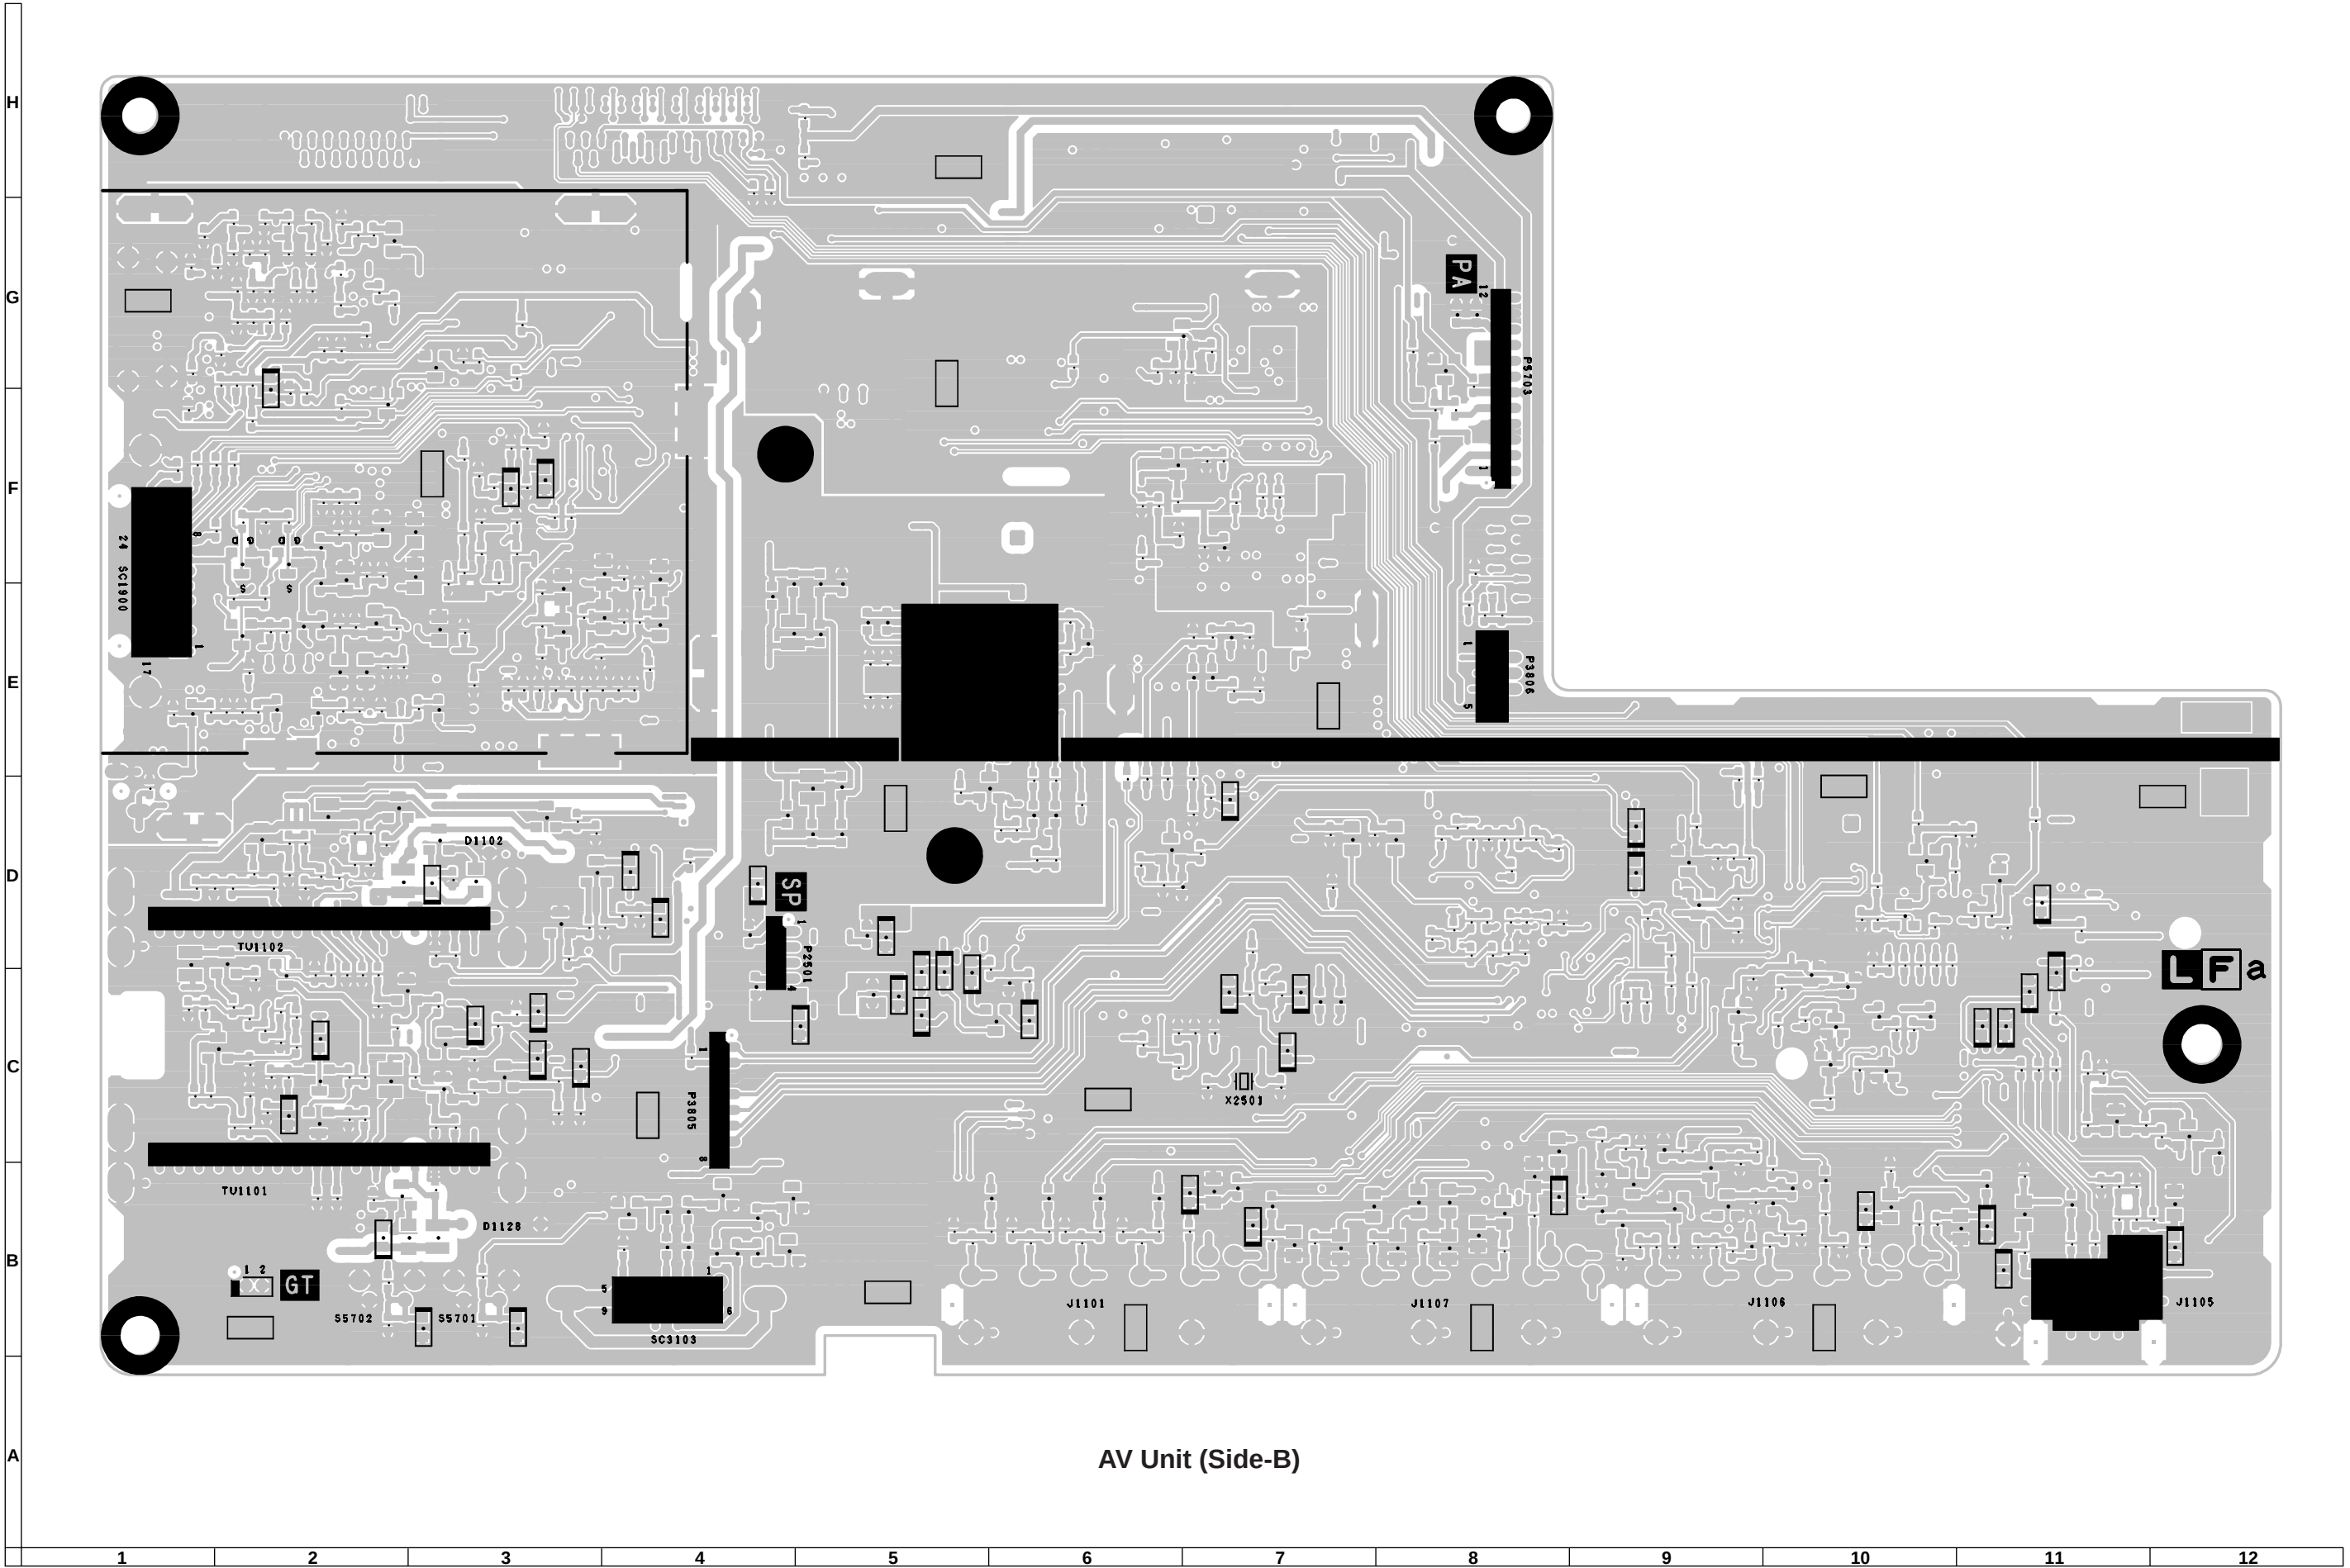


AV Unit (Side-B)

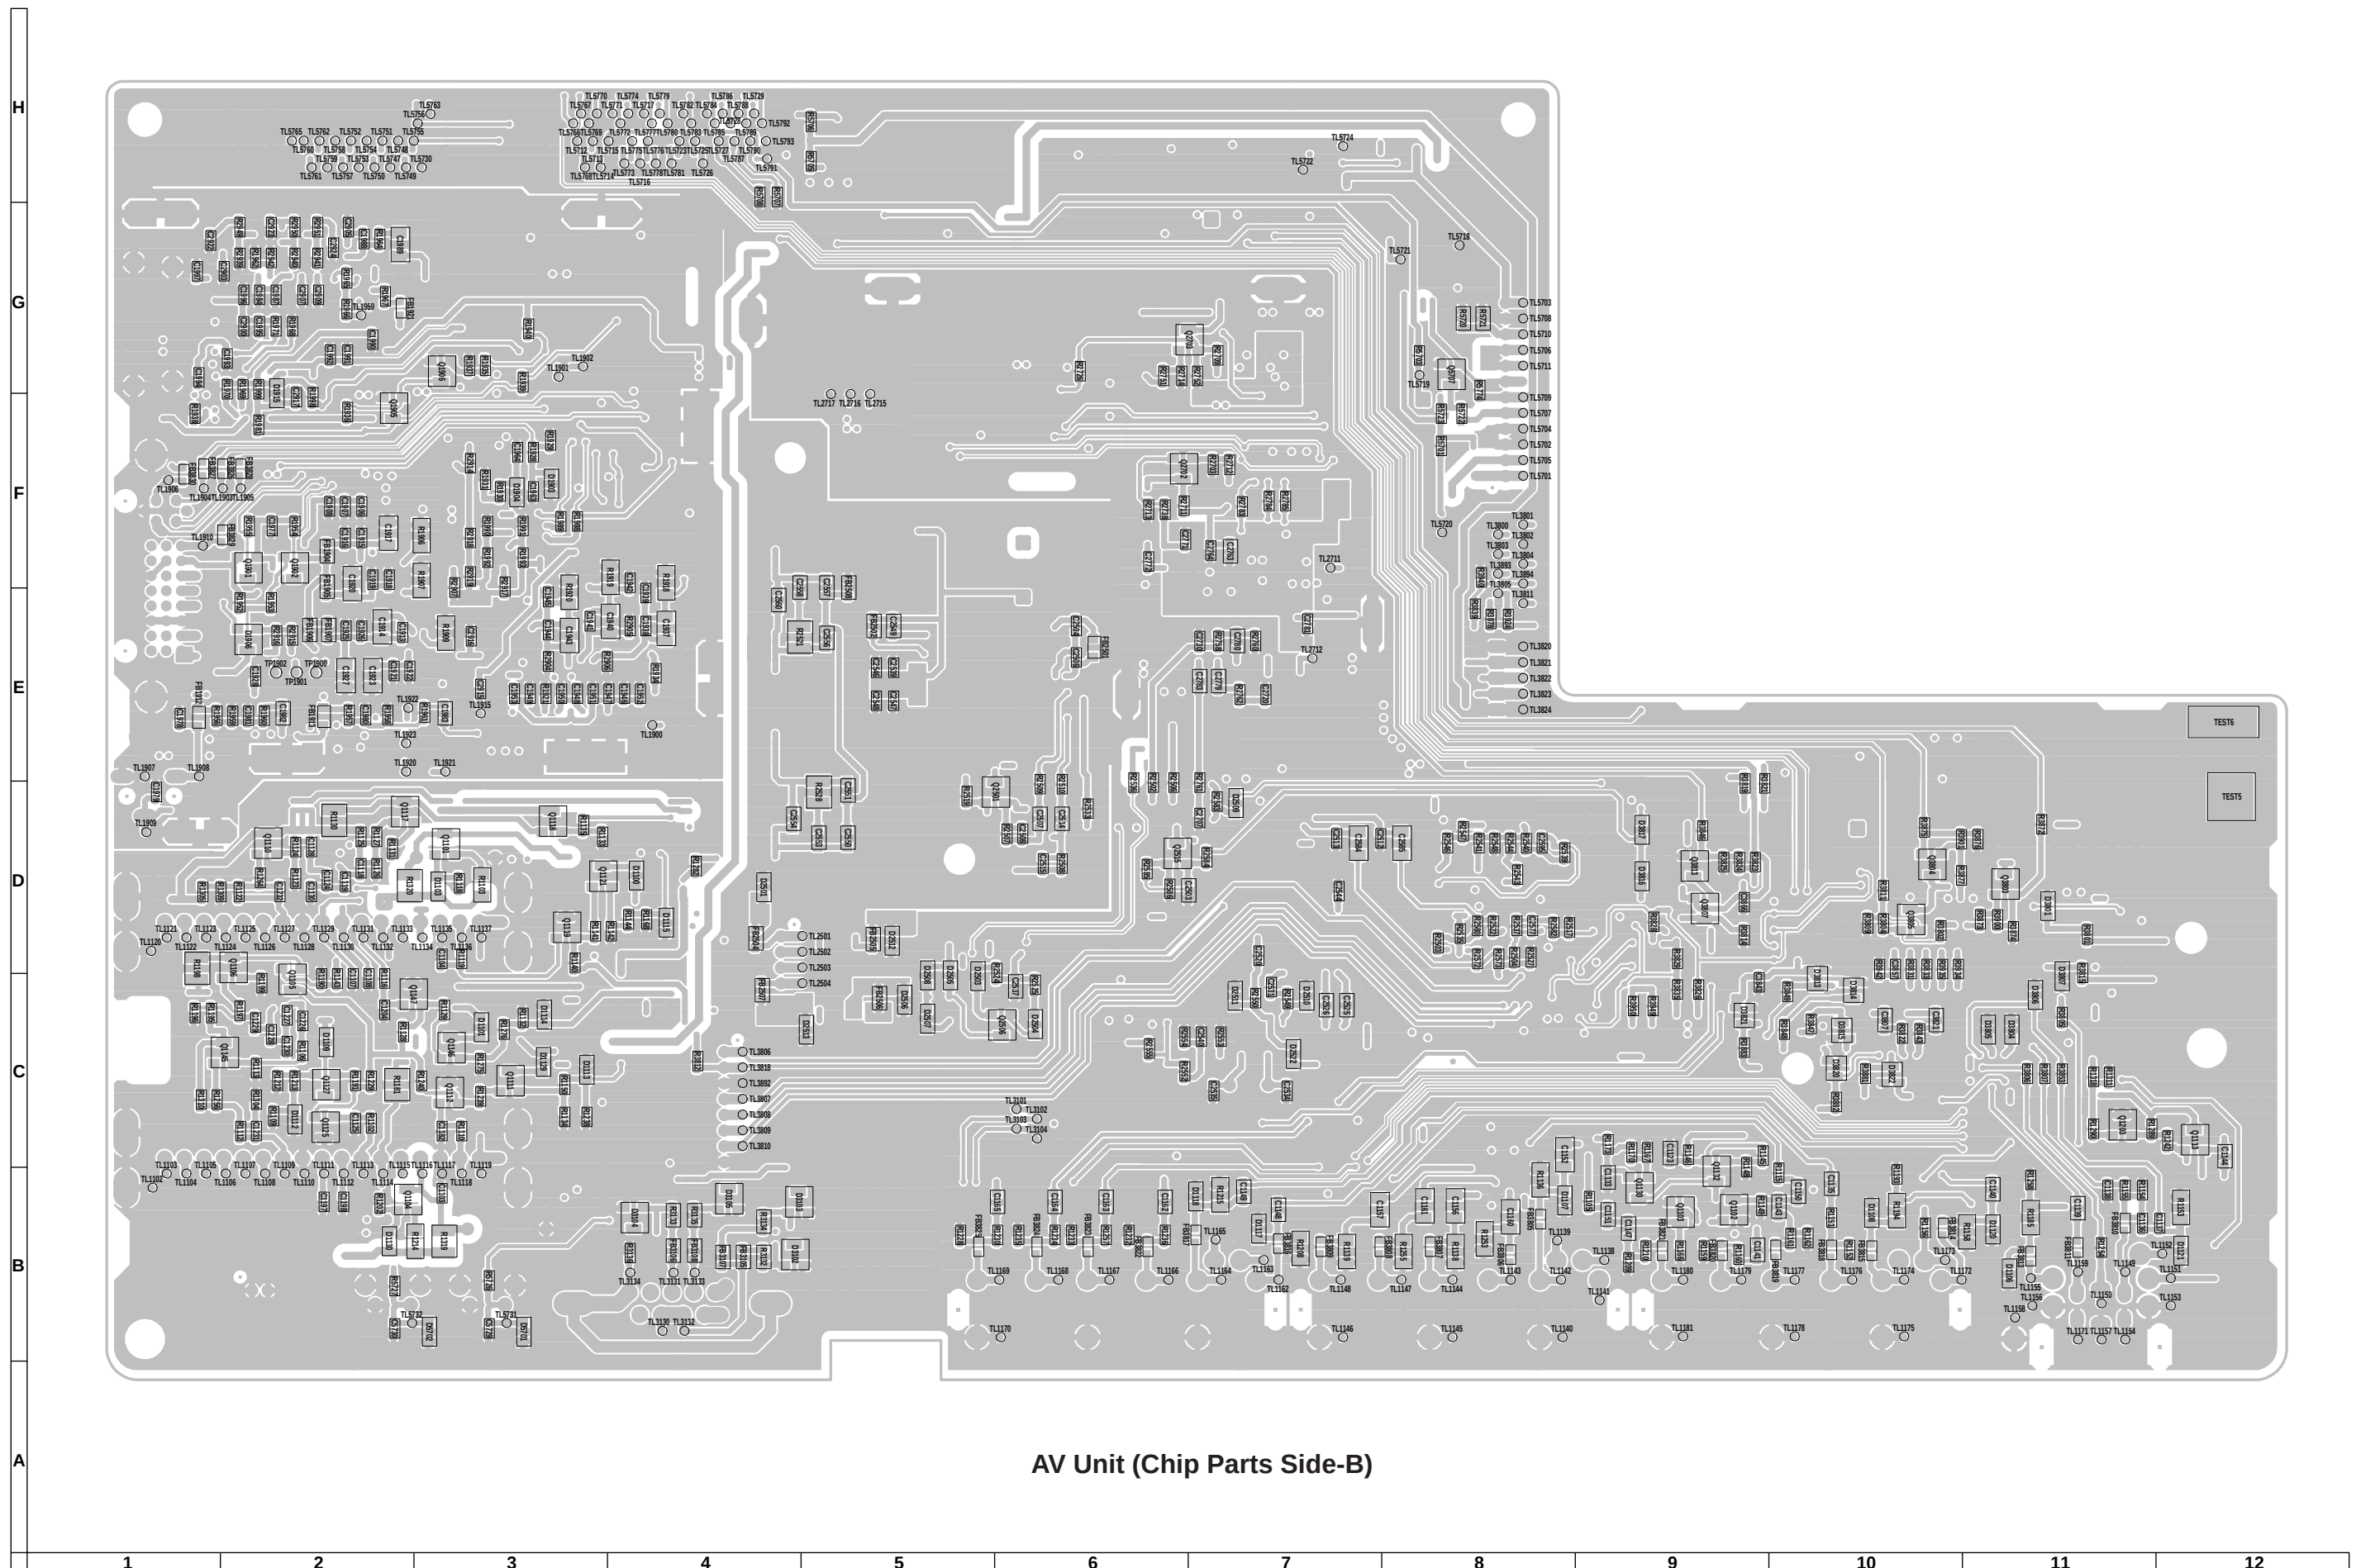




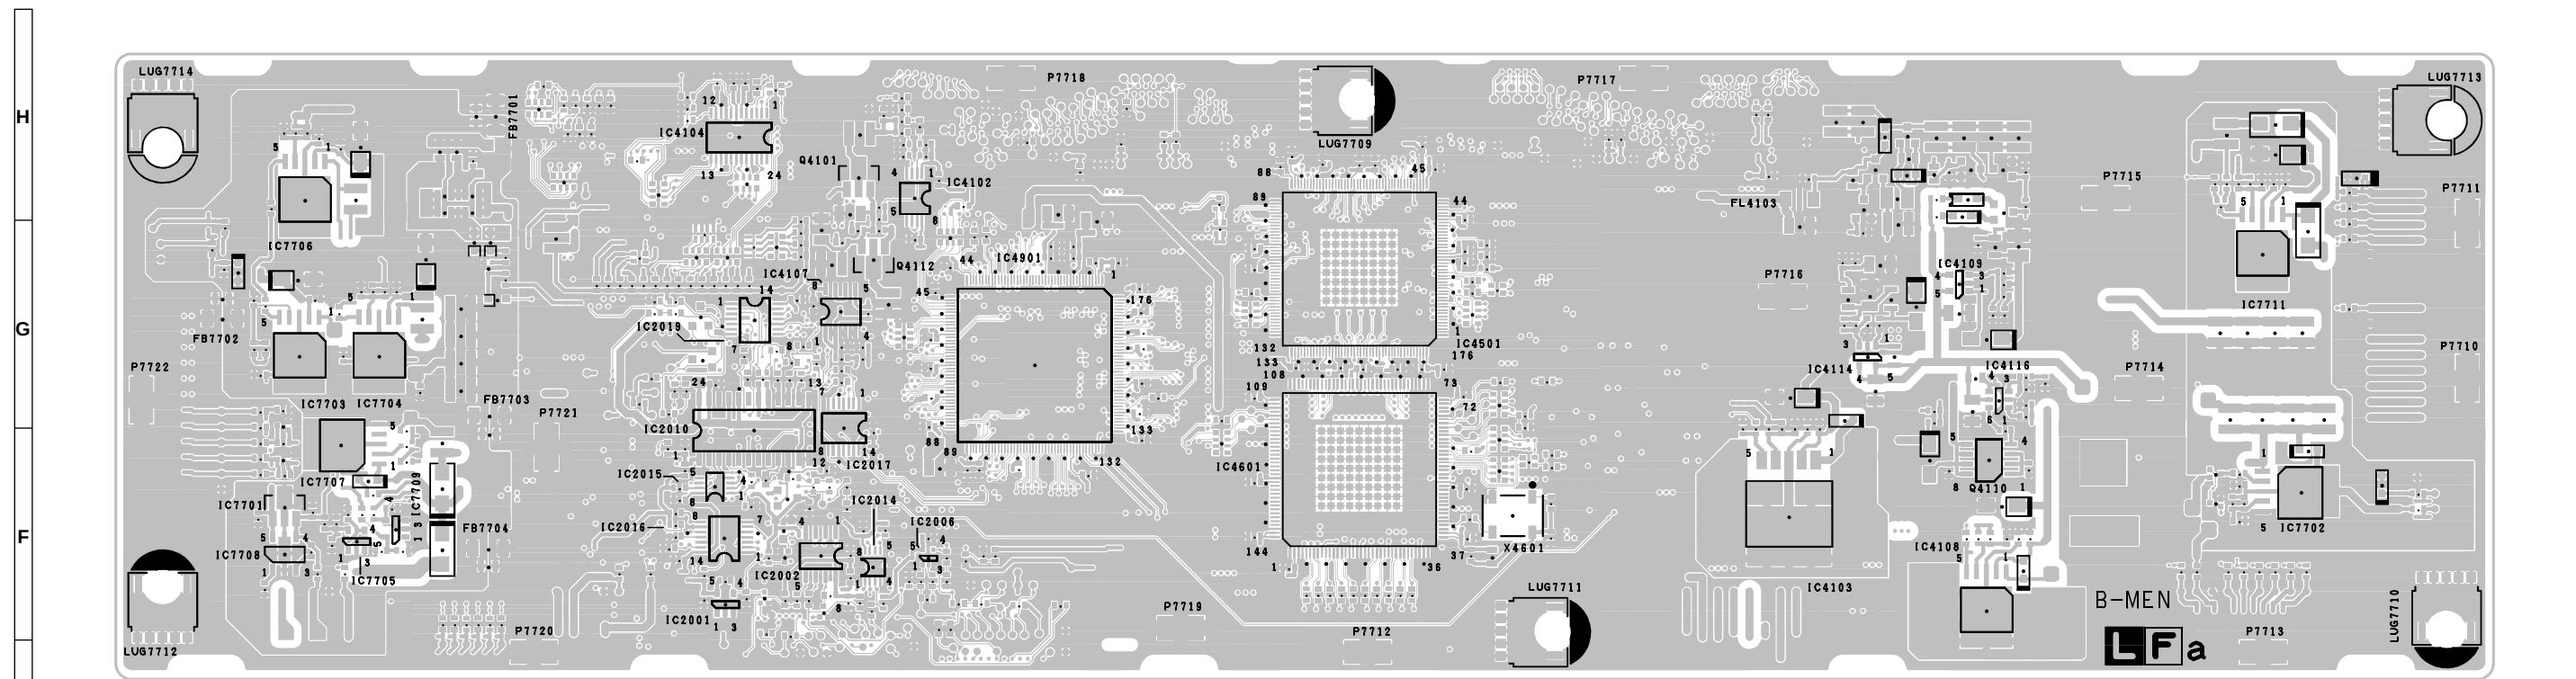



LCD CONTROL Unit (Side-B)

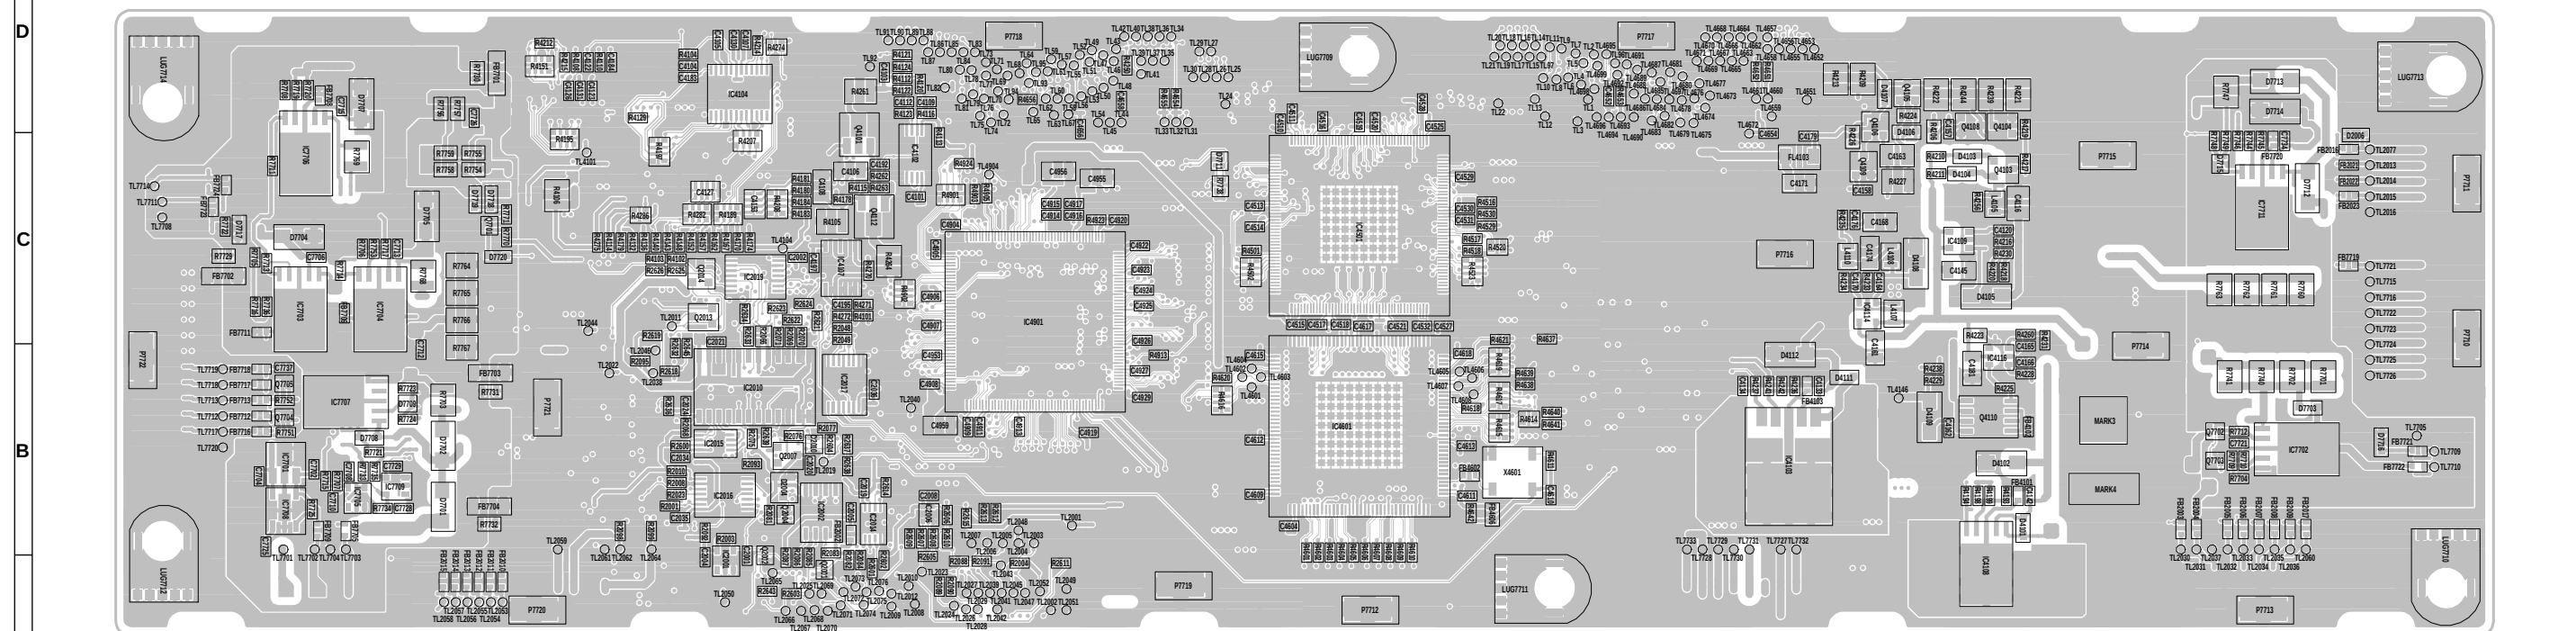


LCD CONTROL Unit (Chip Parts Side-B)

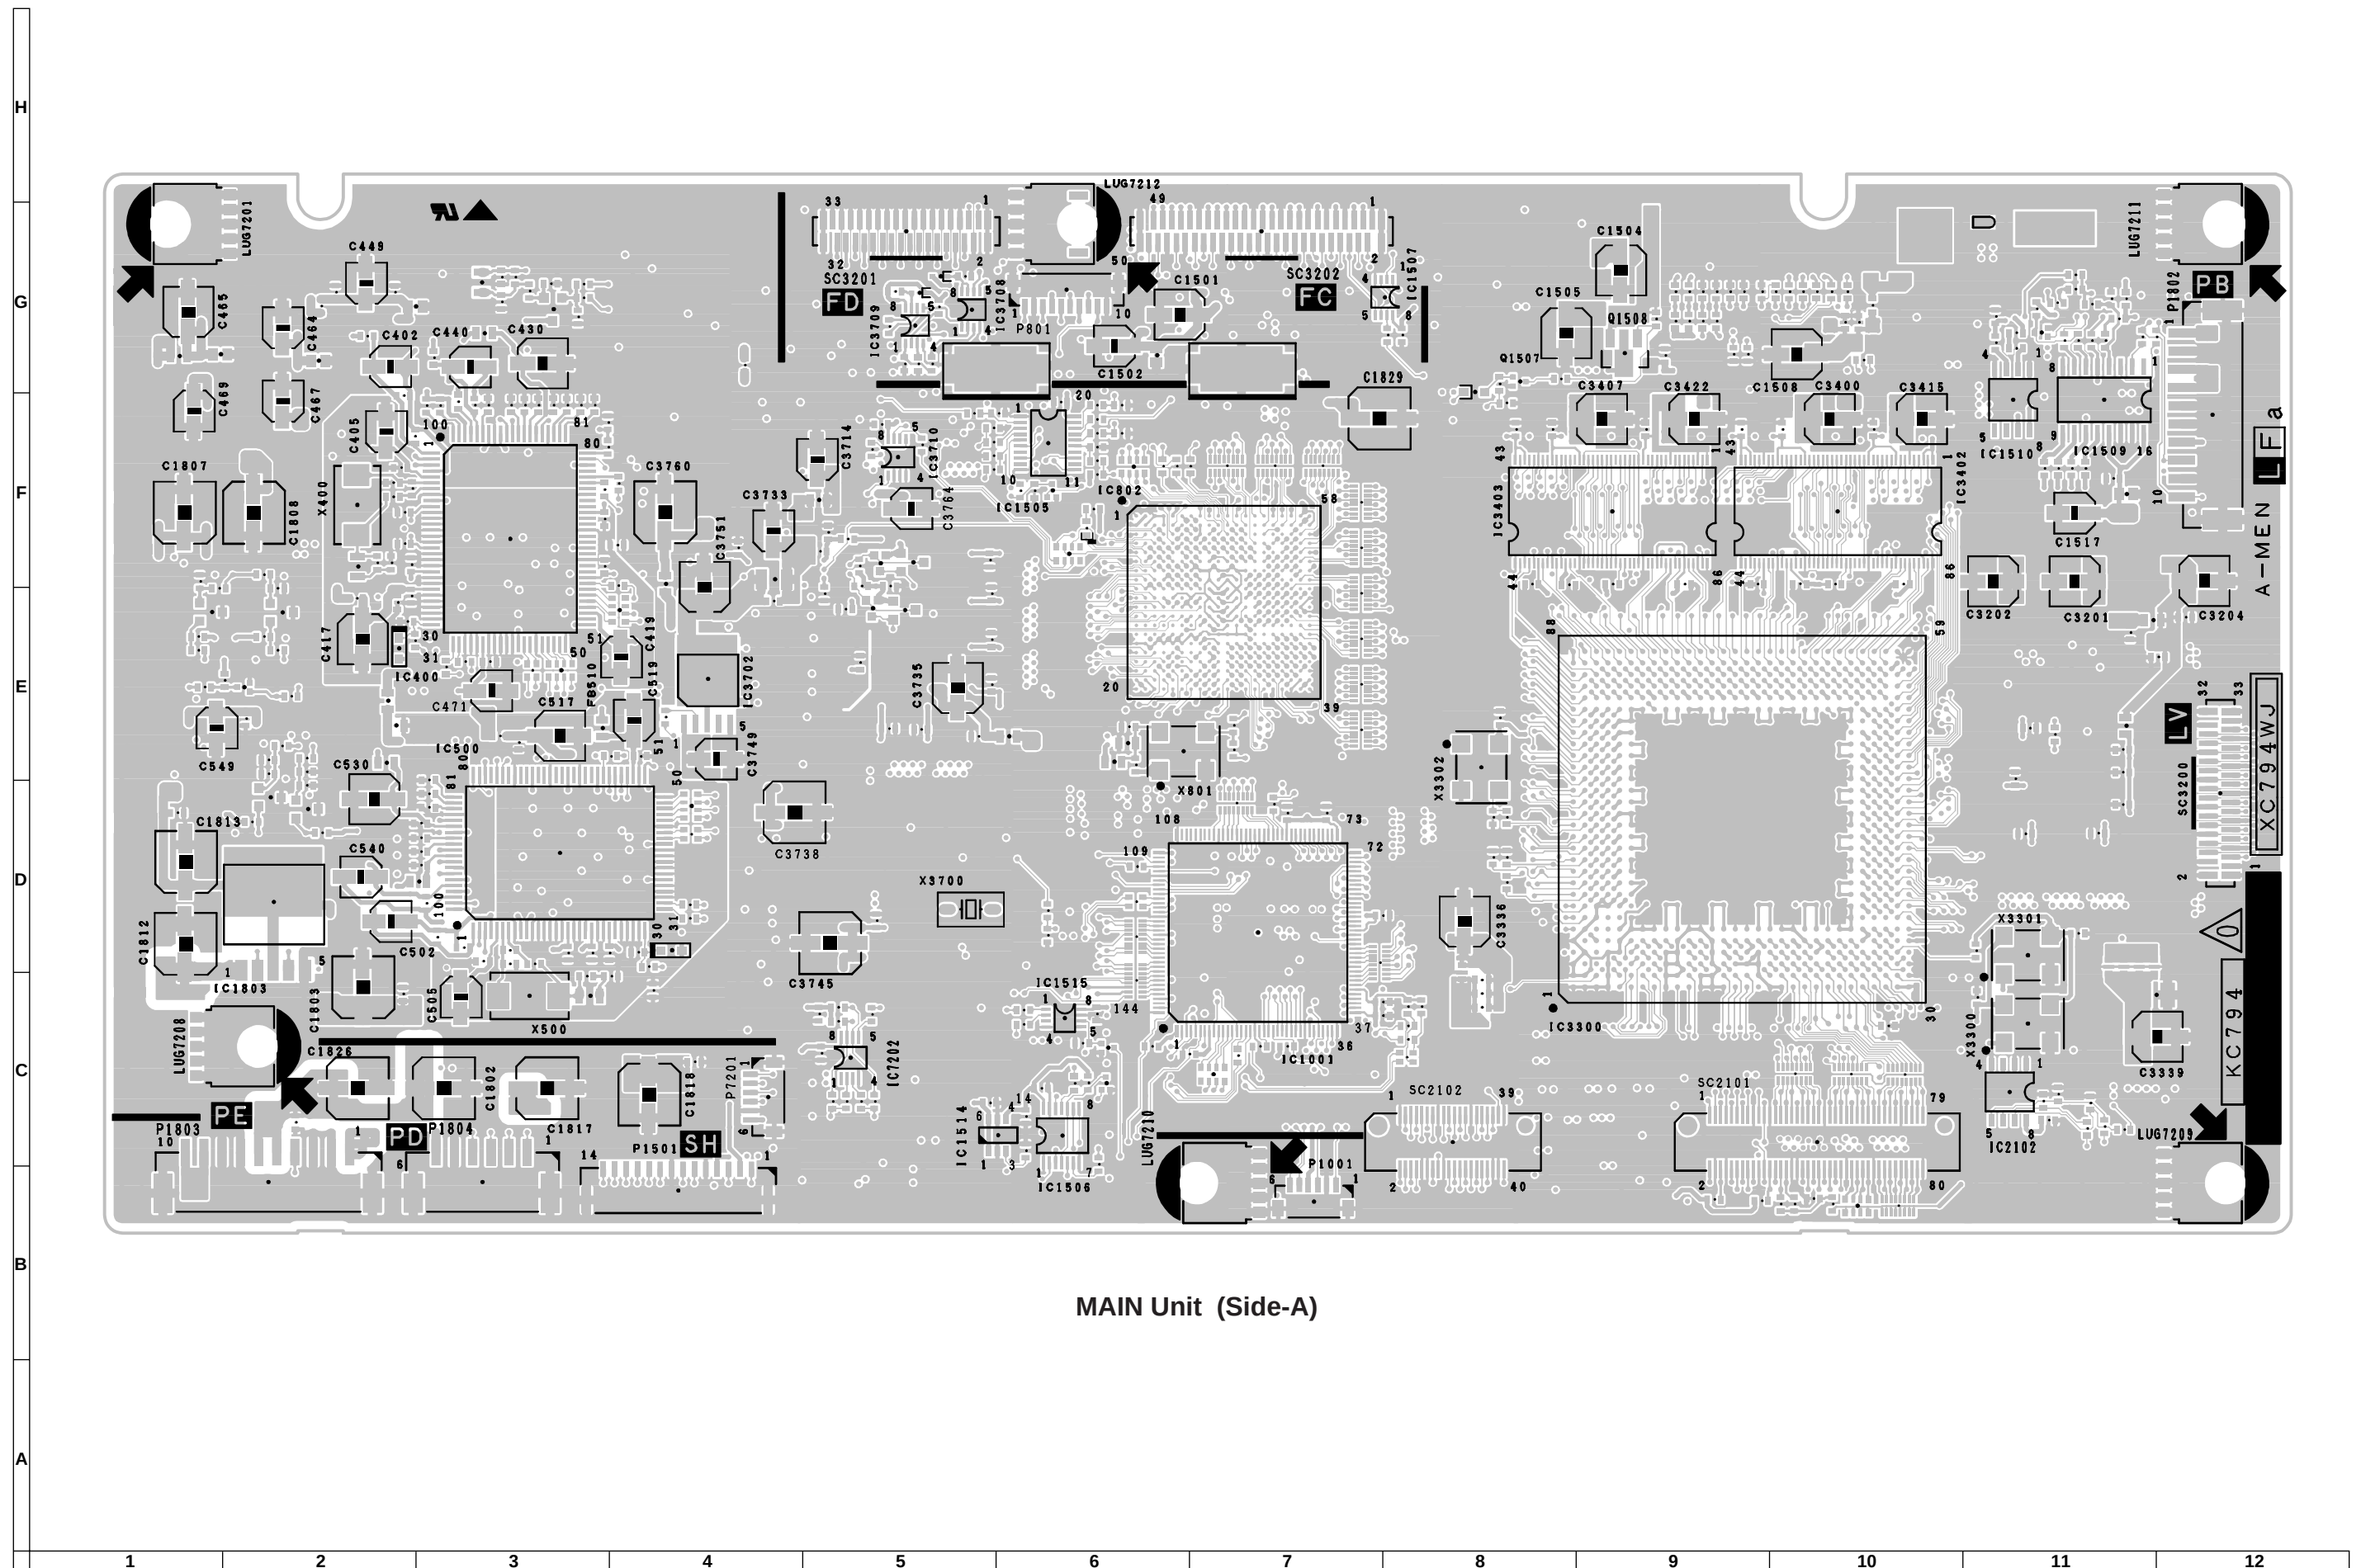


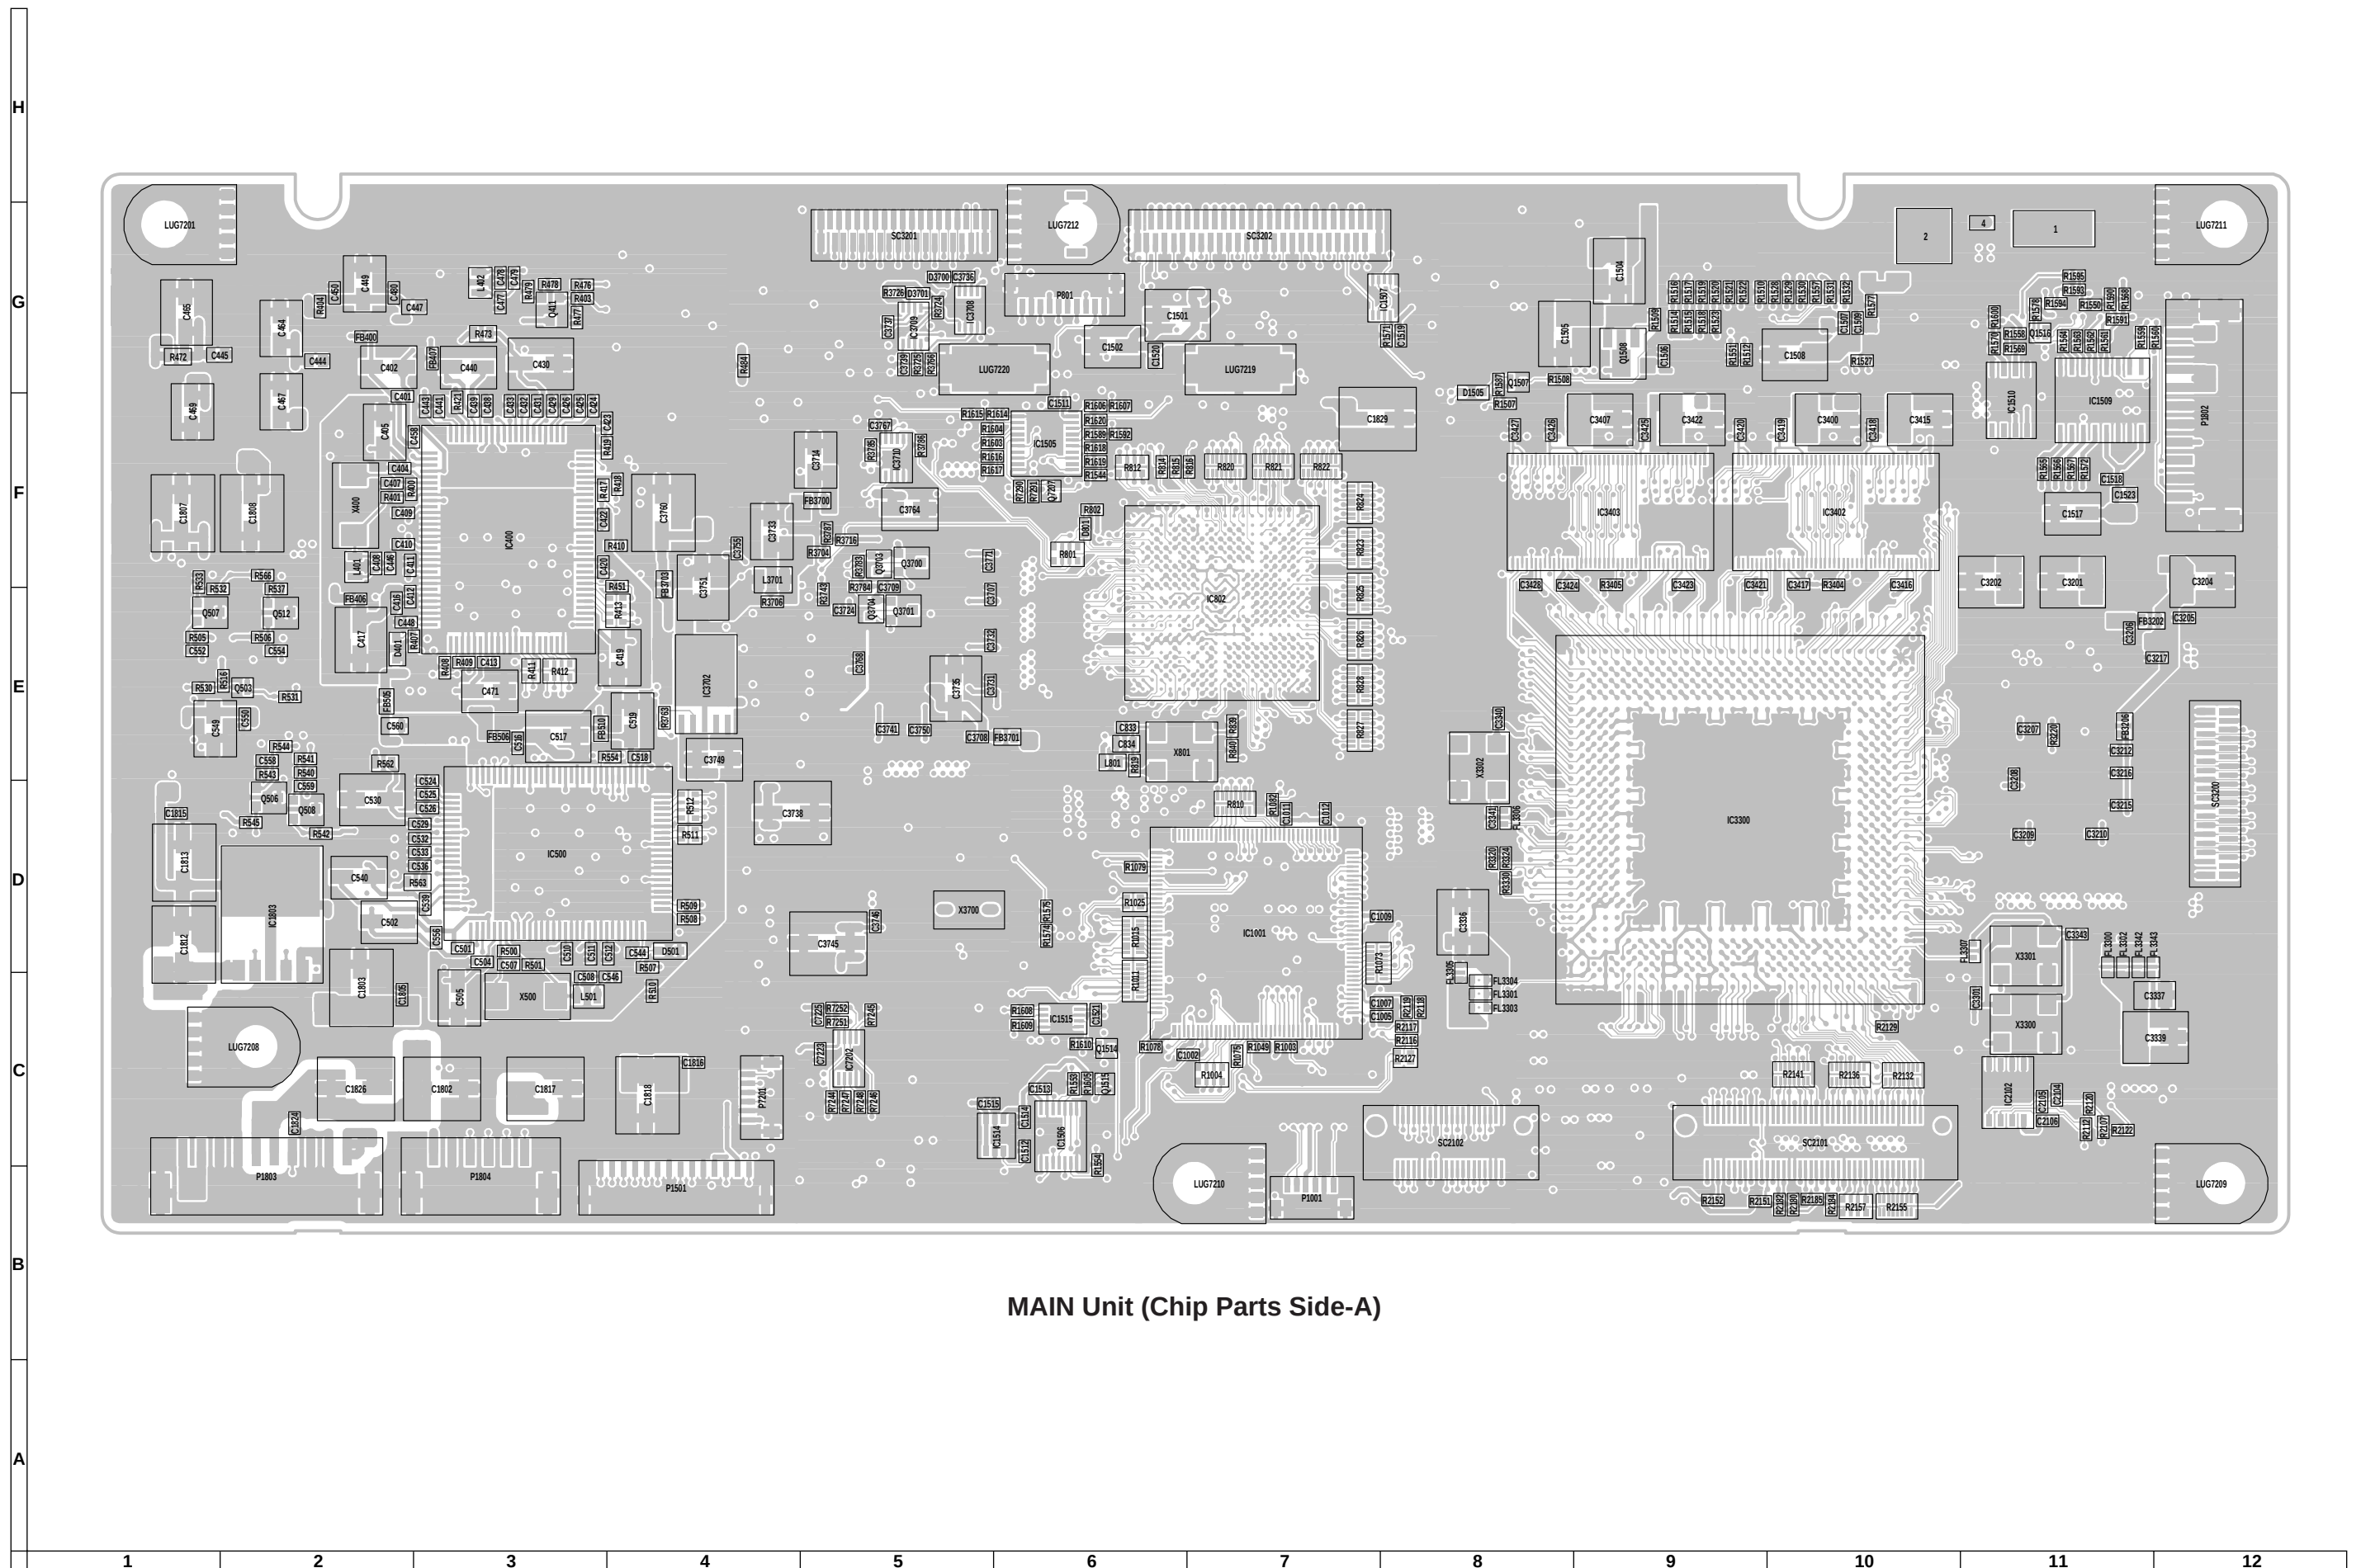

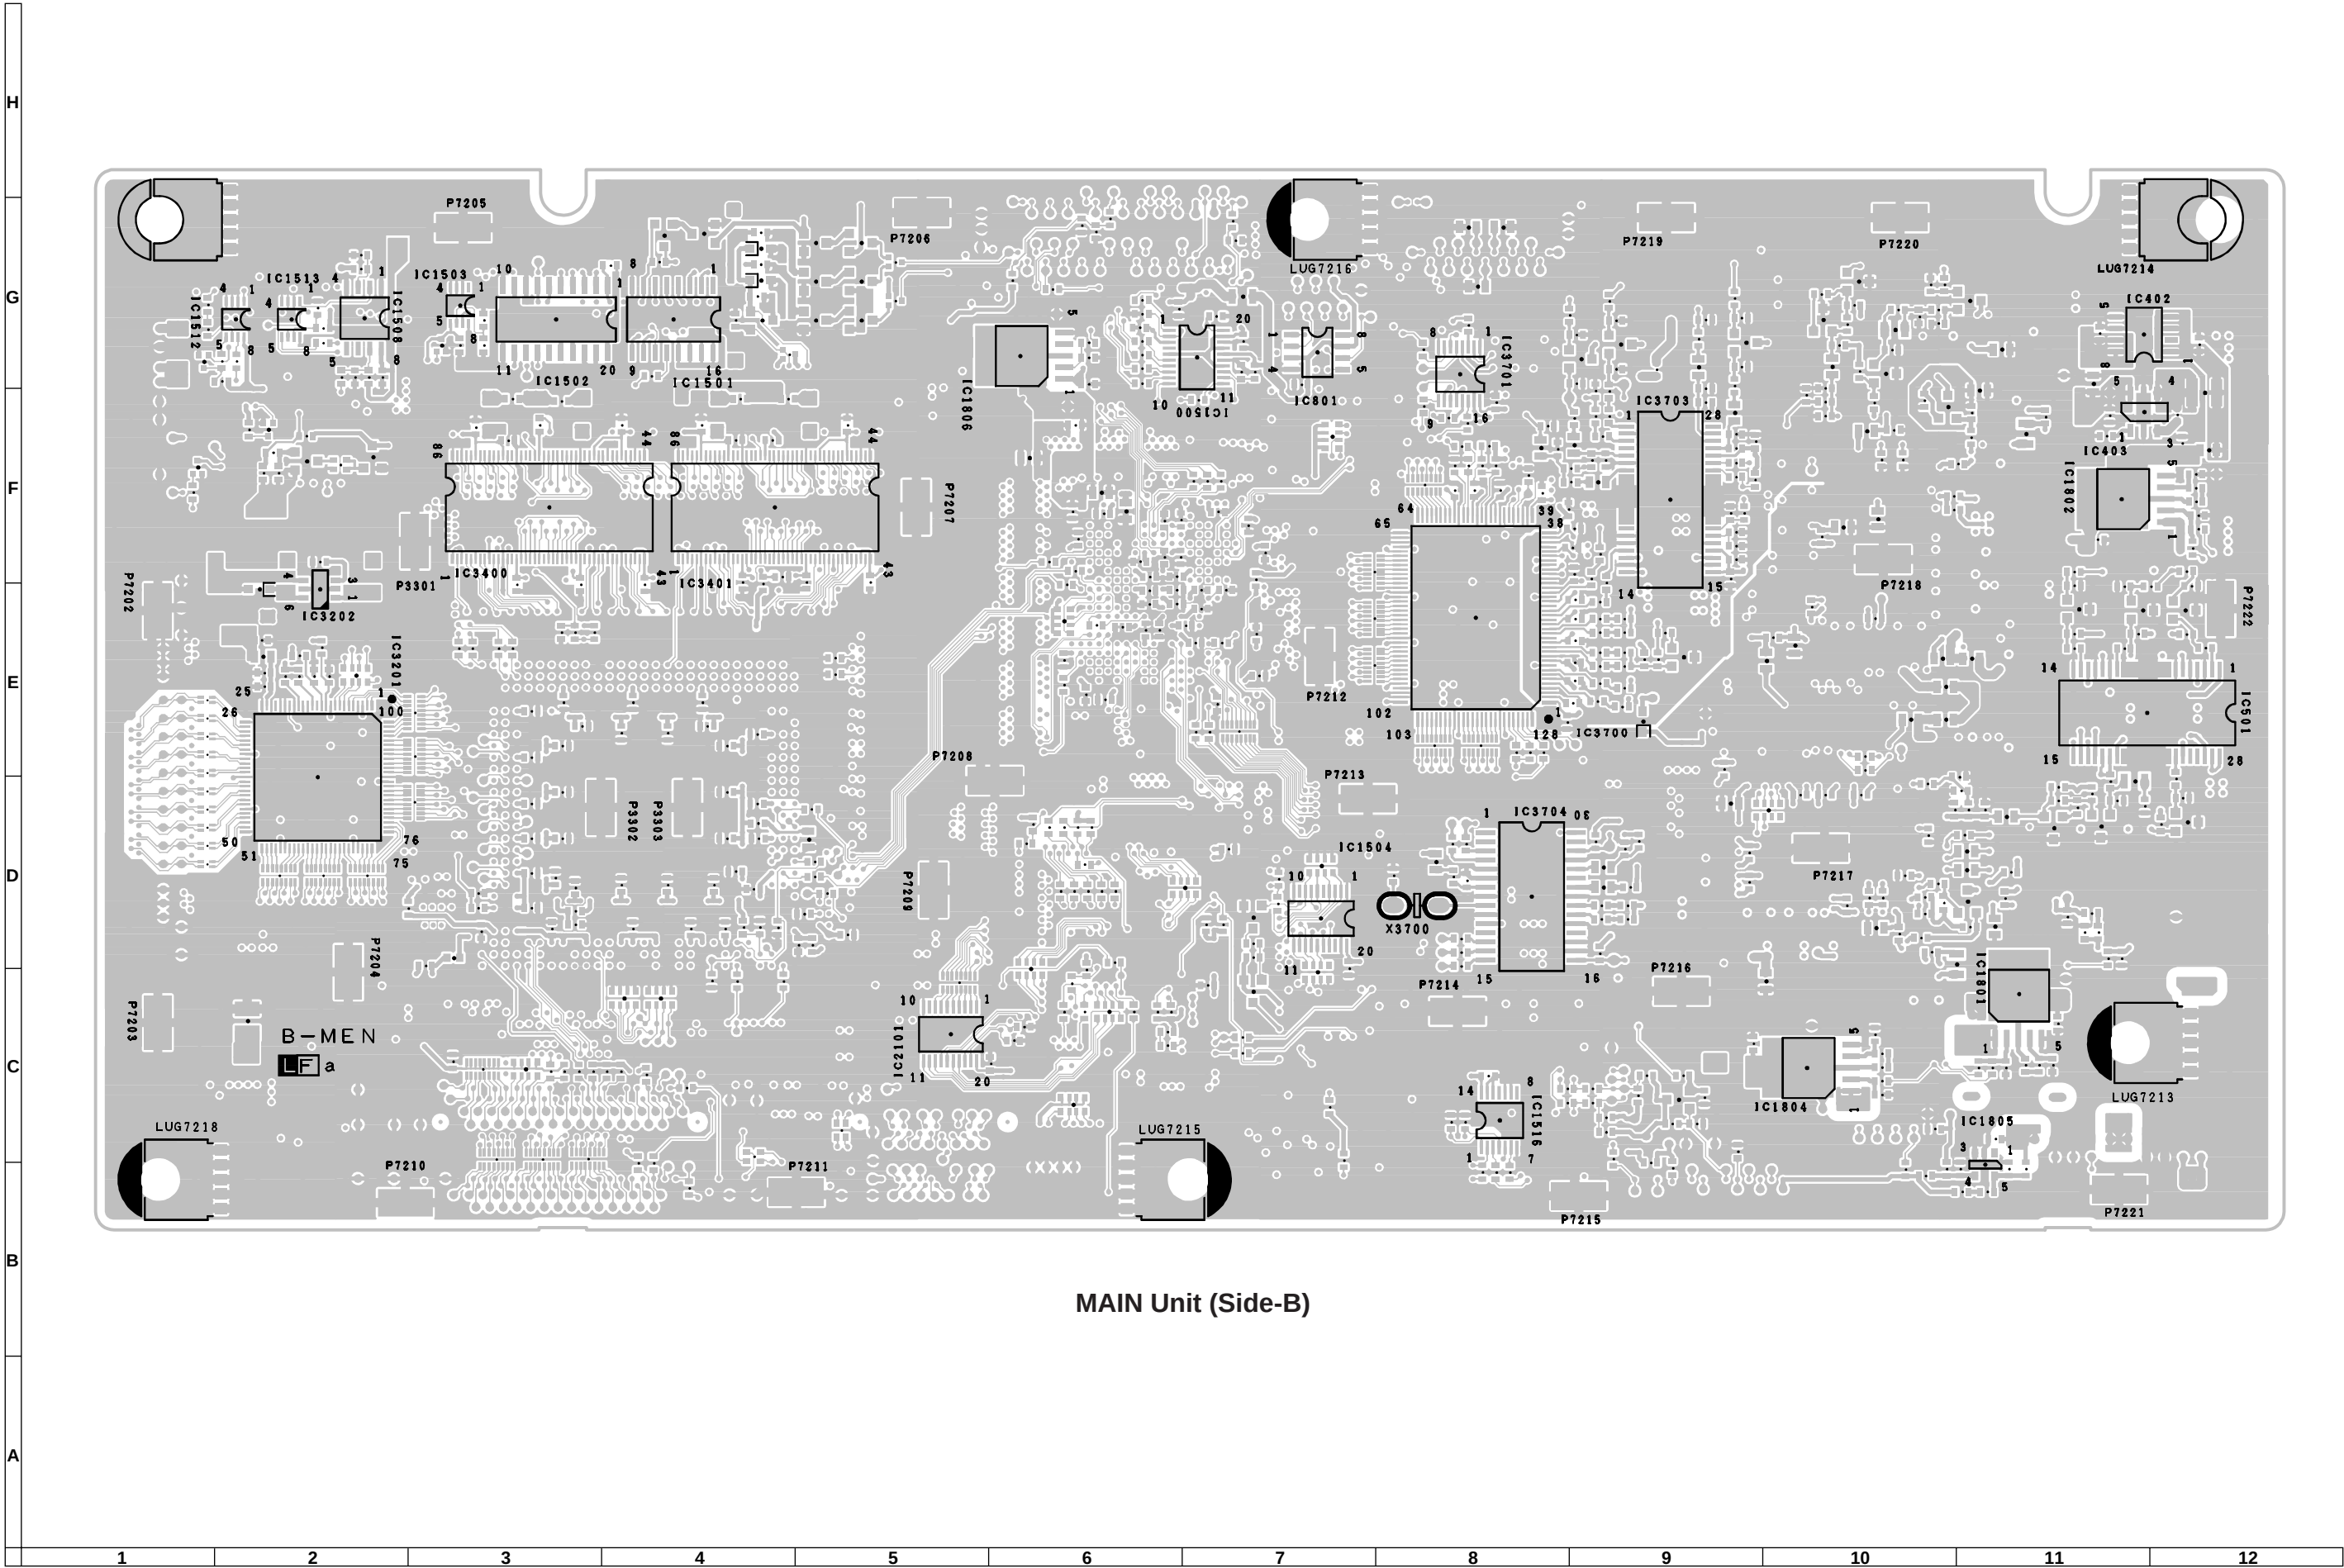


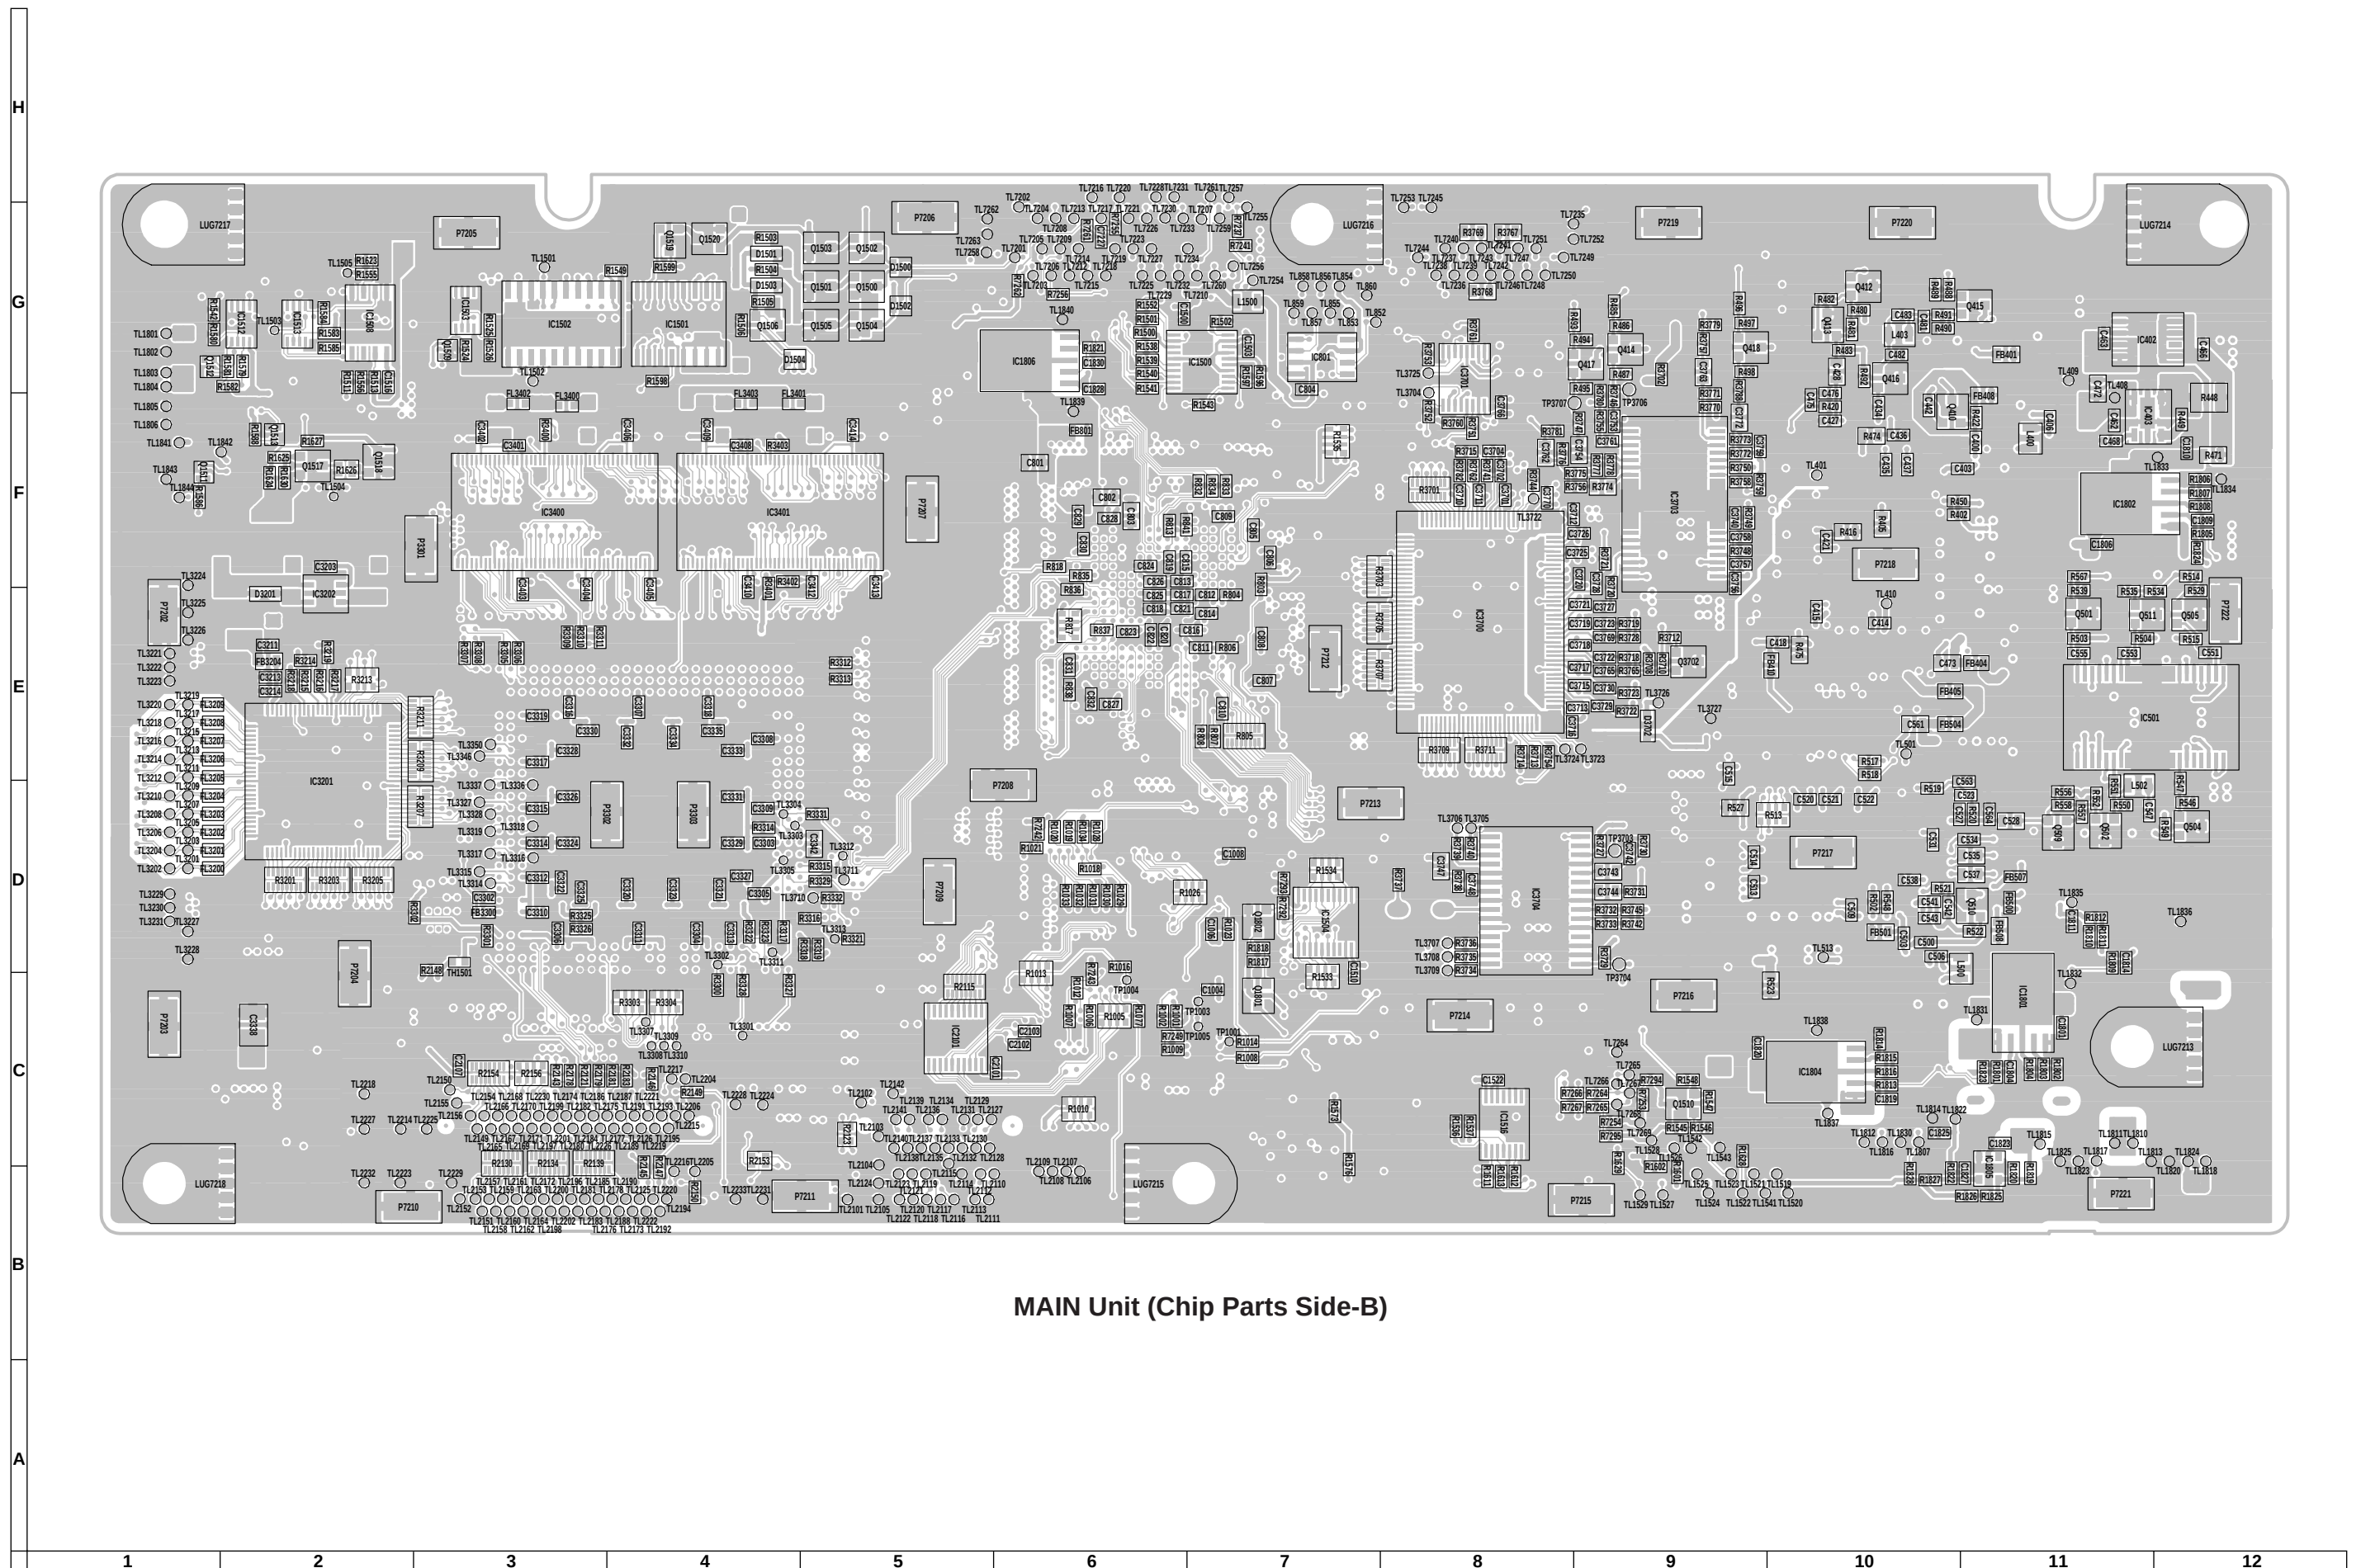




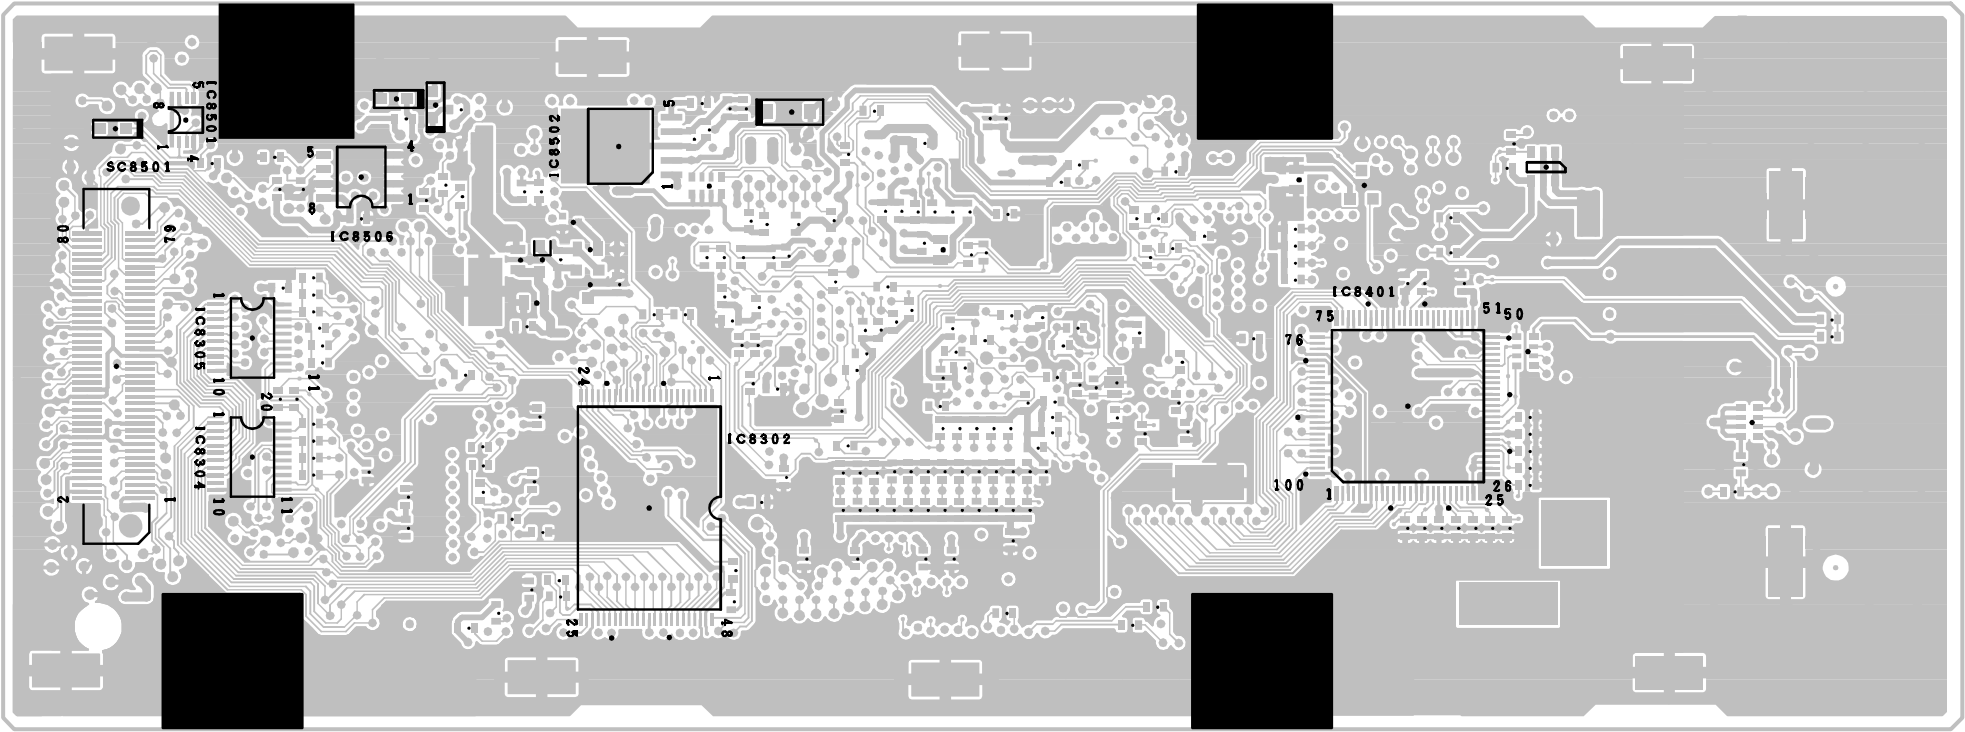



CPU Unit (Side-B)

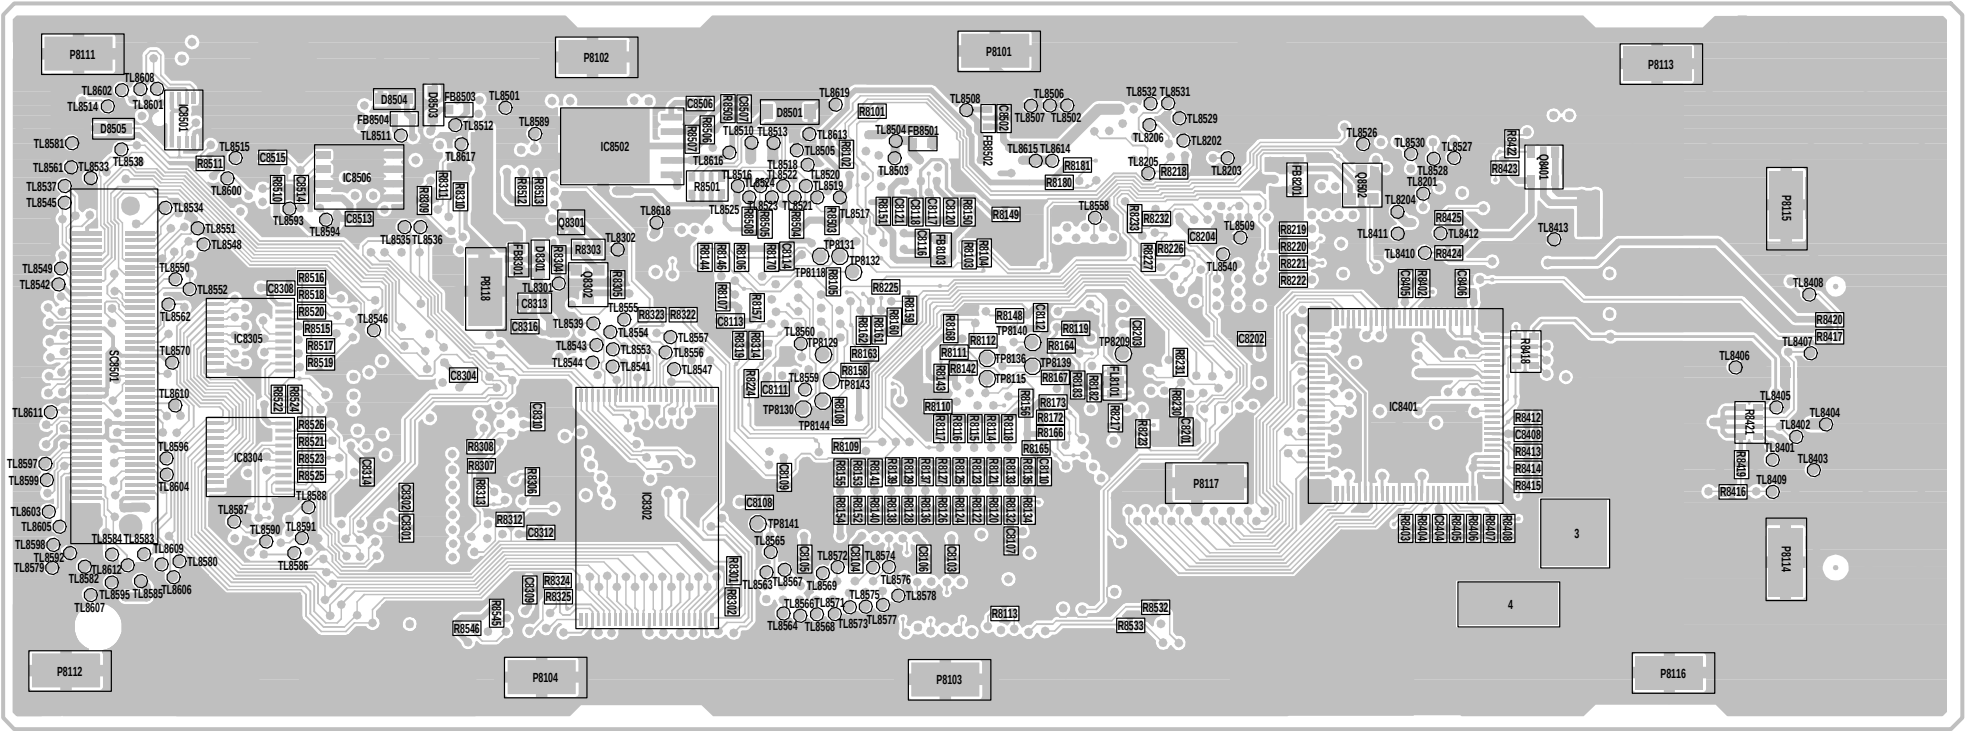


CPU Unit (Chip Parts Side-B)

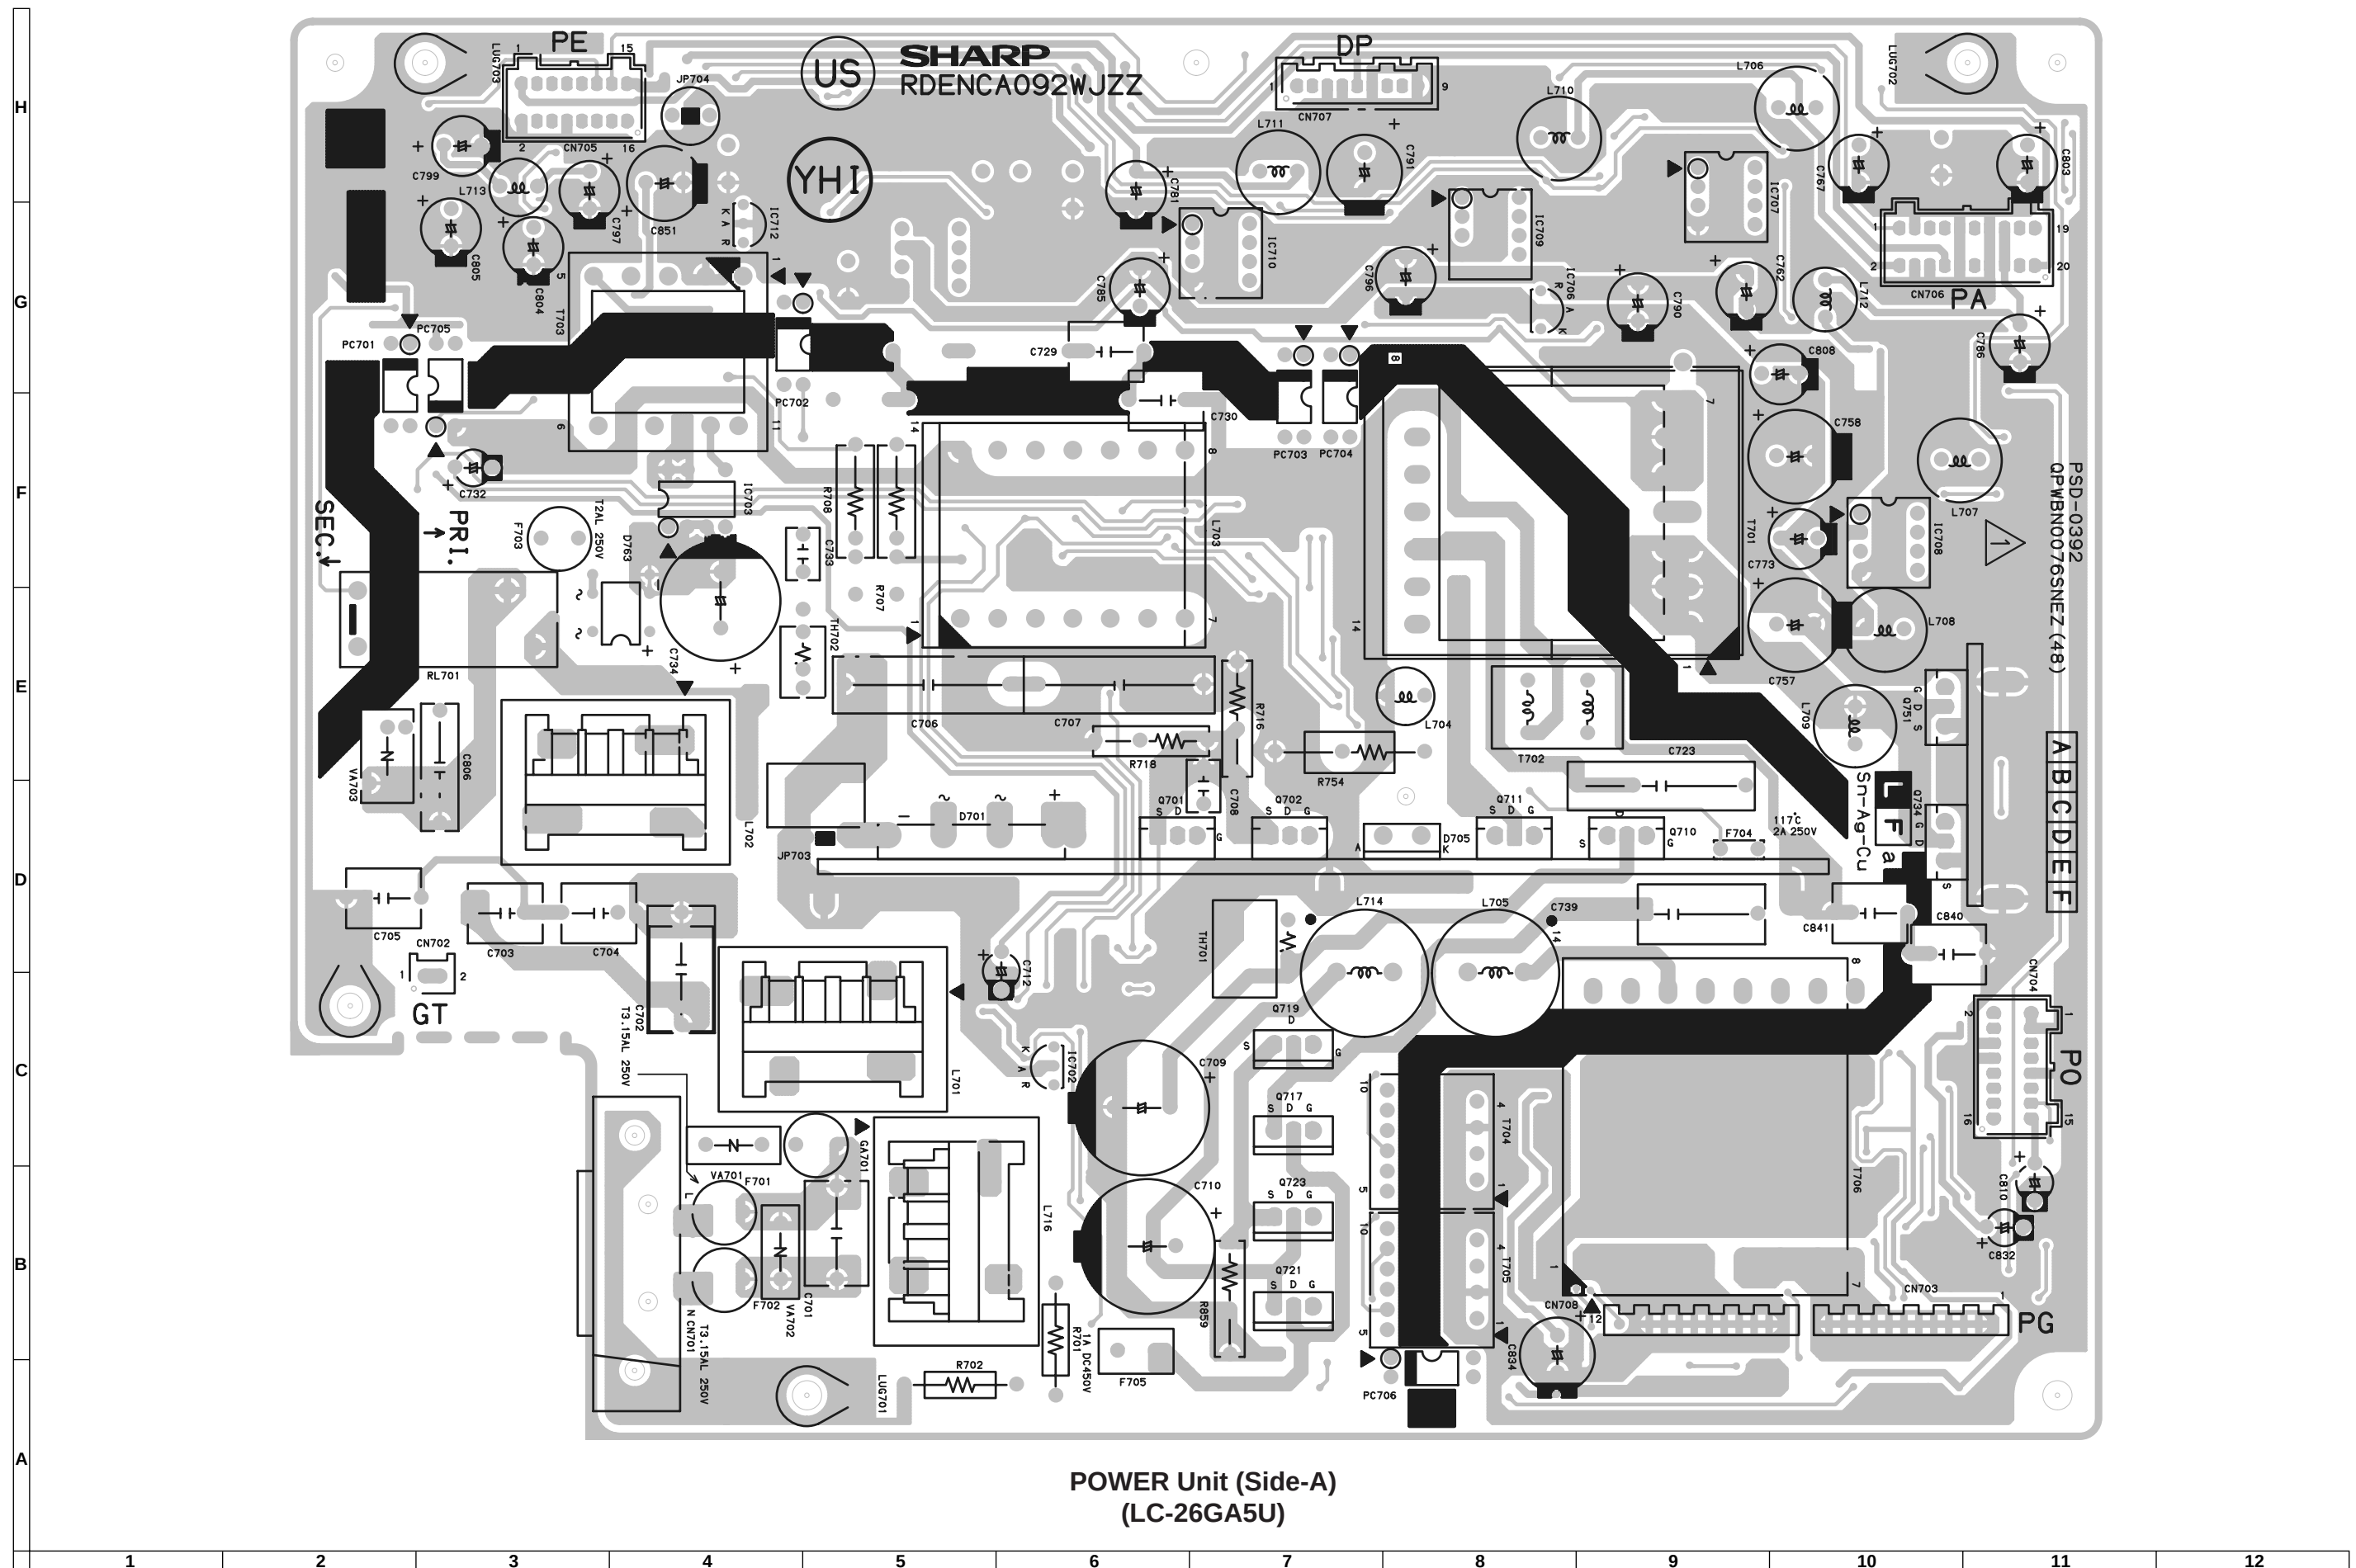

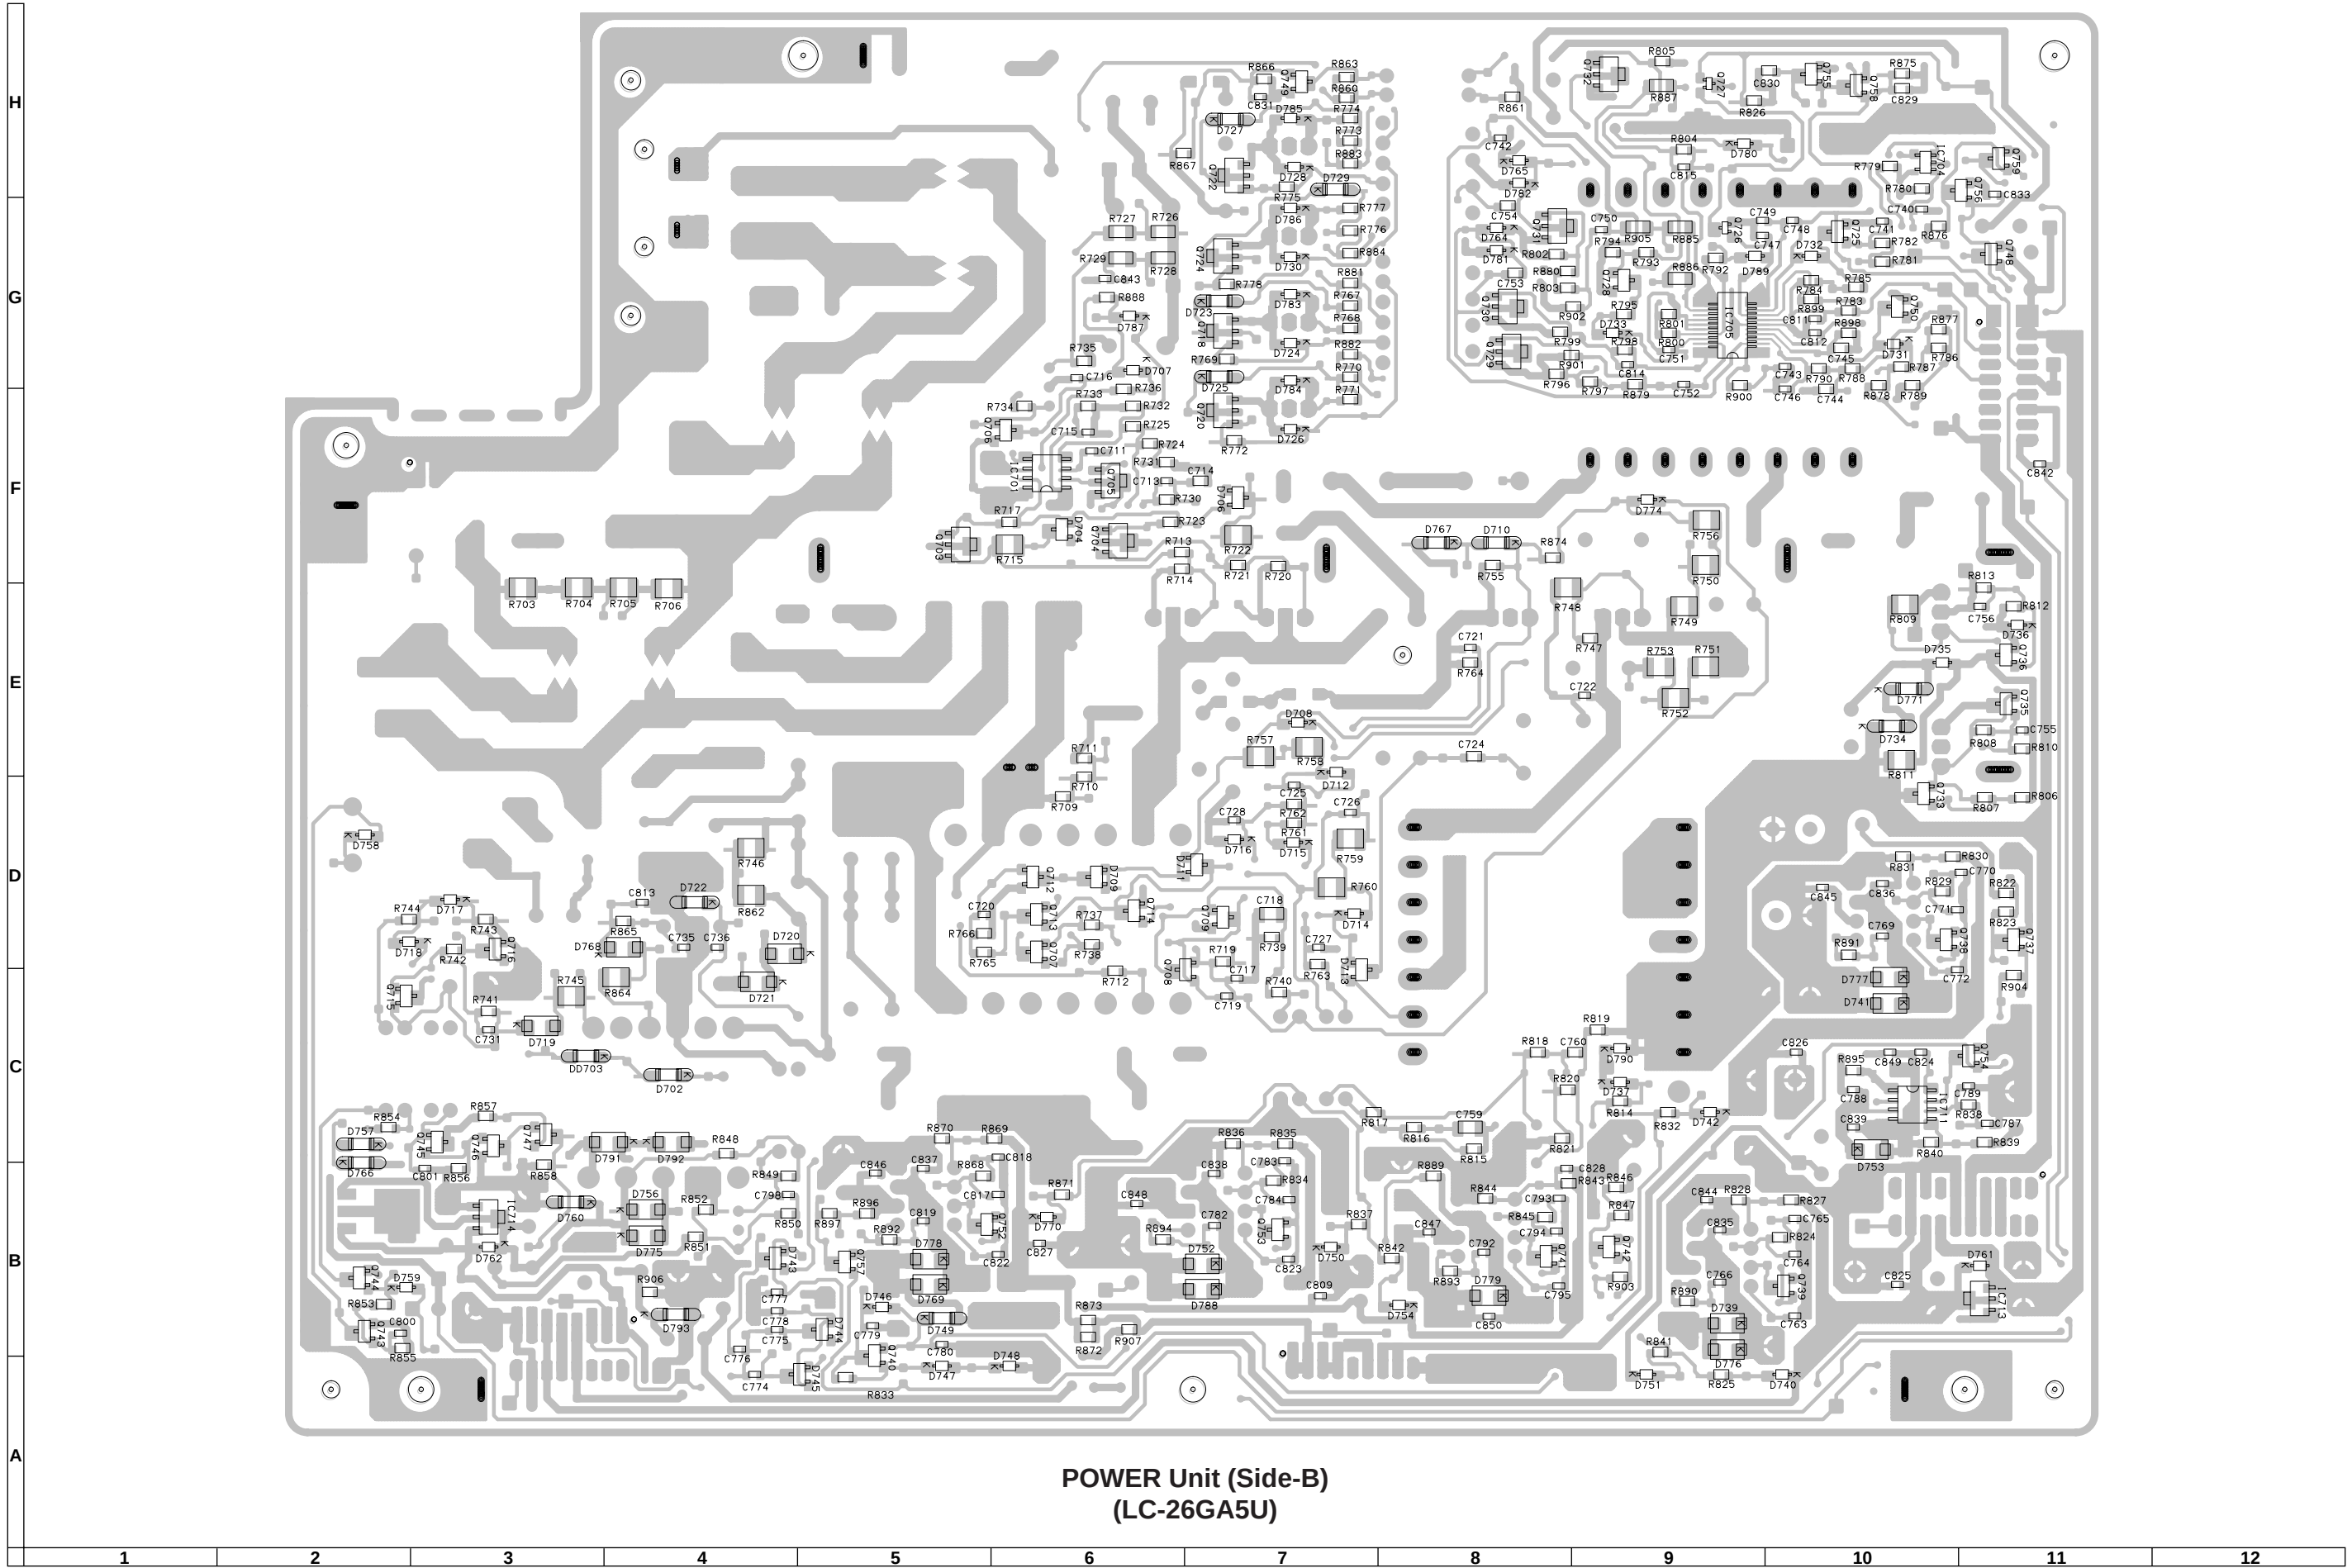


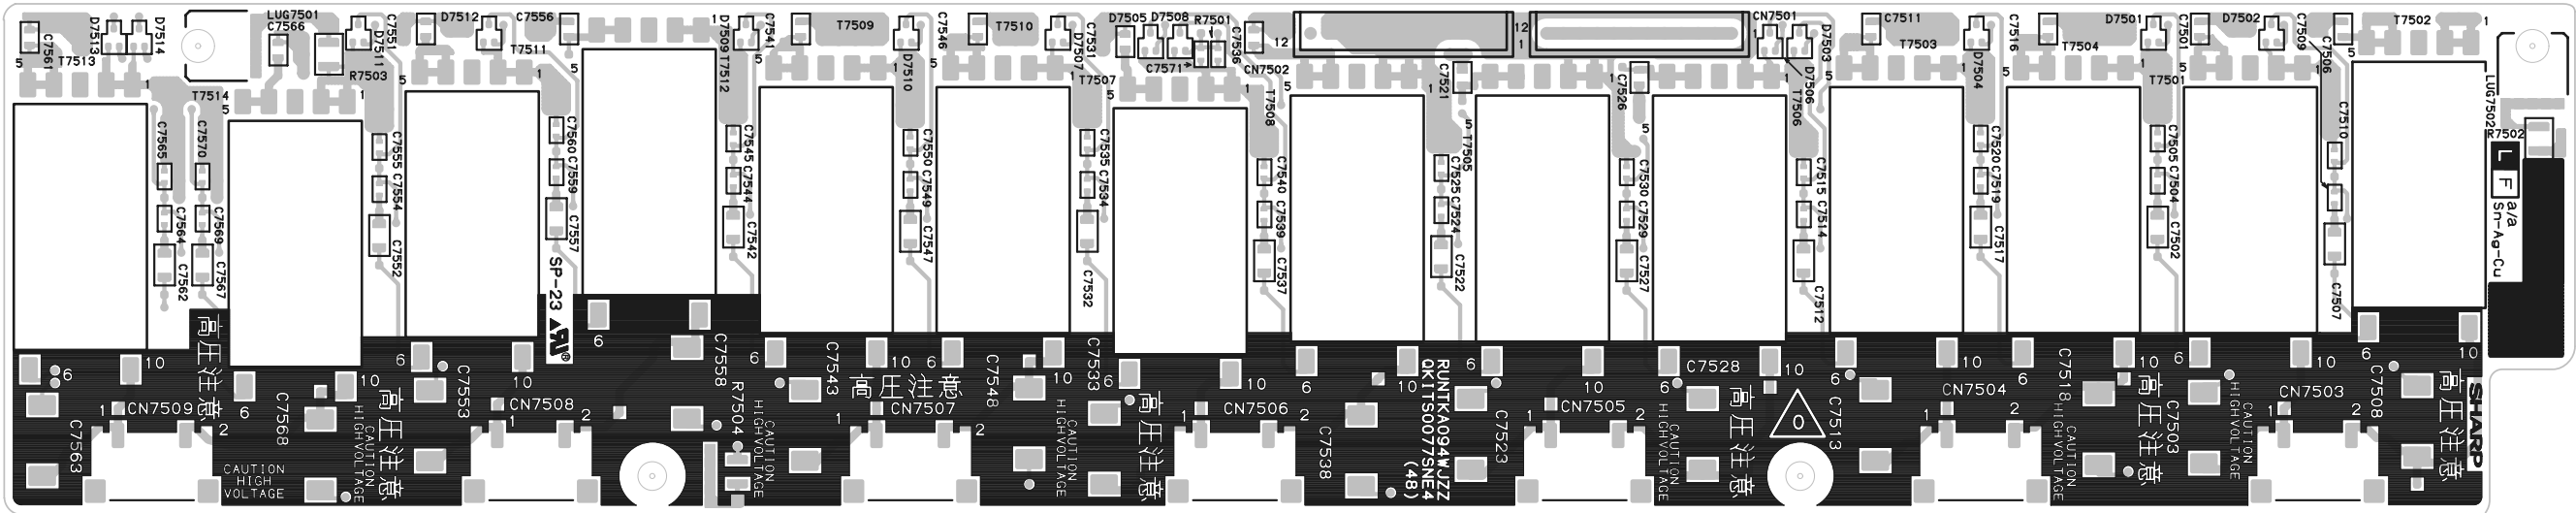


INVERTER Unit (Component Side)
(LC-26GA5U)

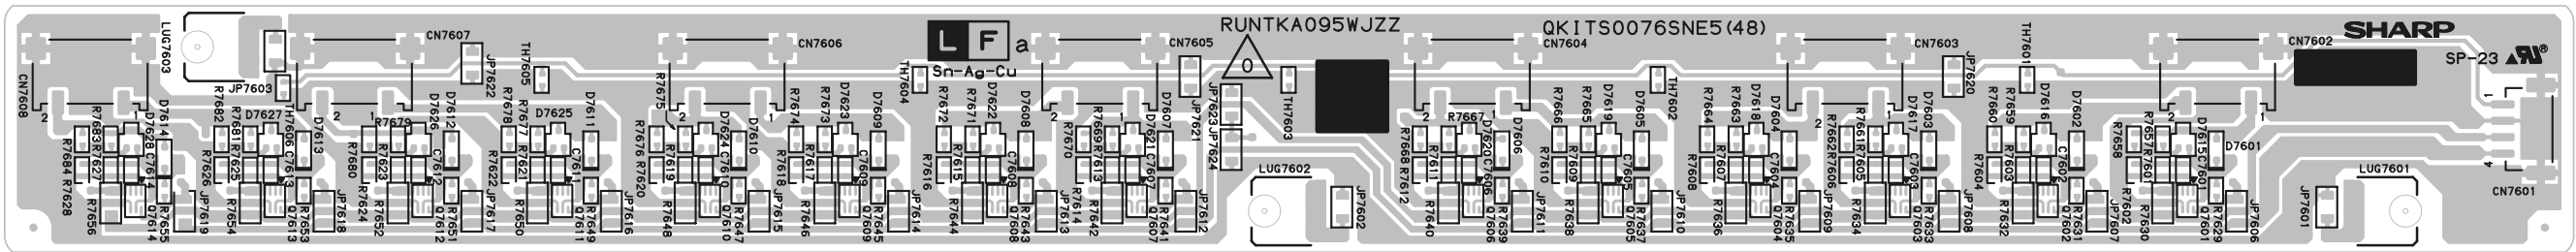


INVERTER-GND Unit (Component Side)
(LC-26GA5U)

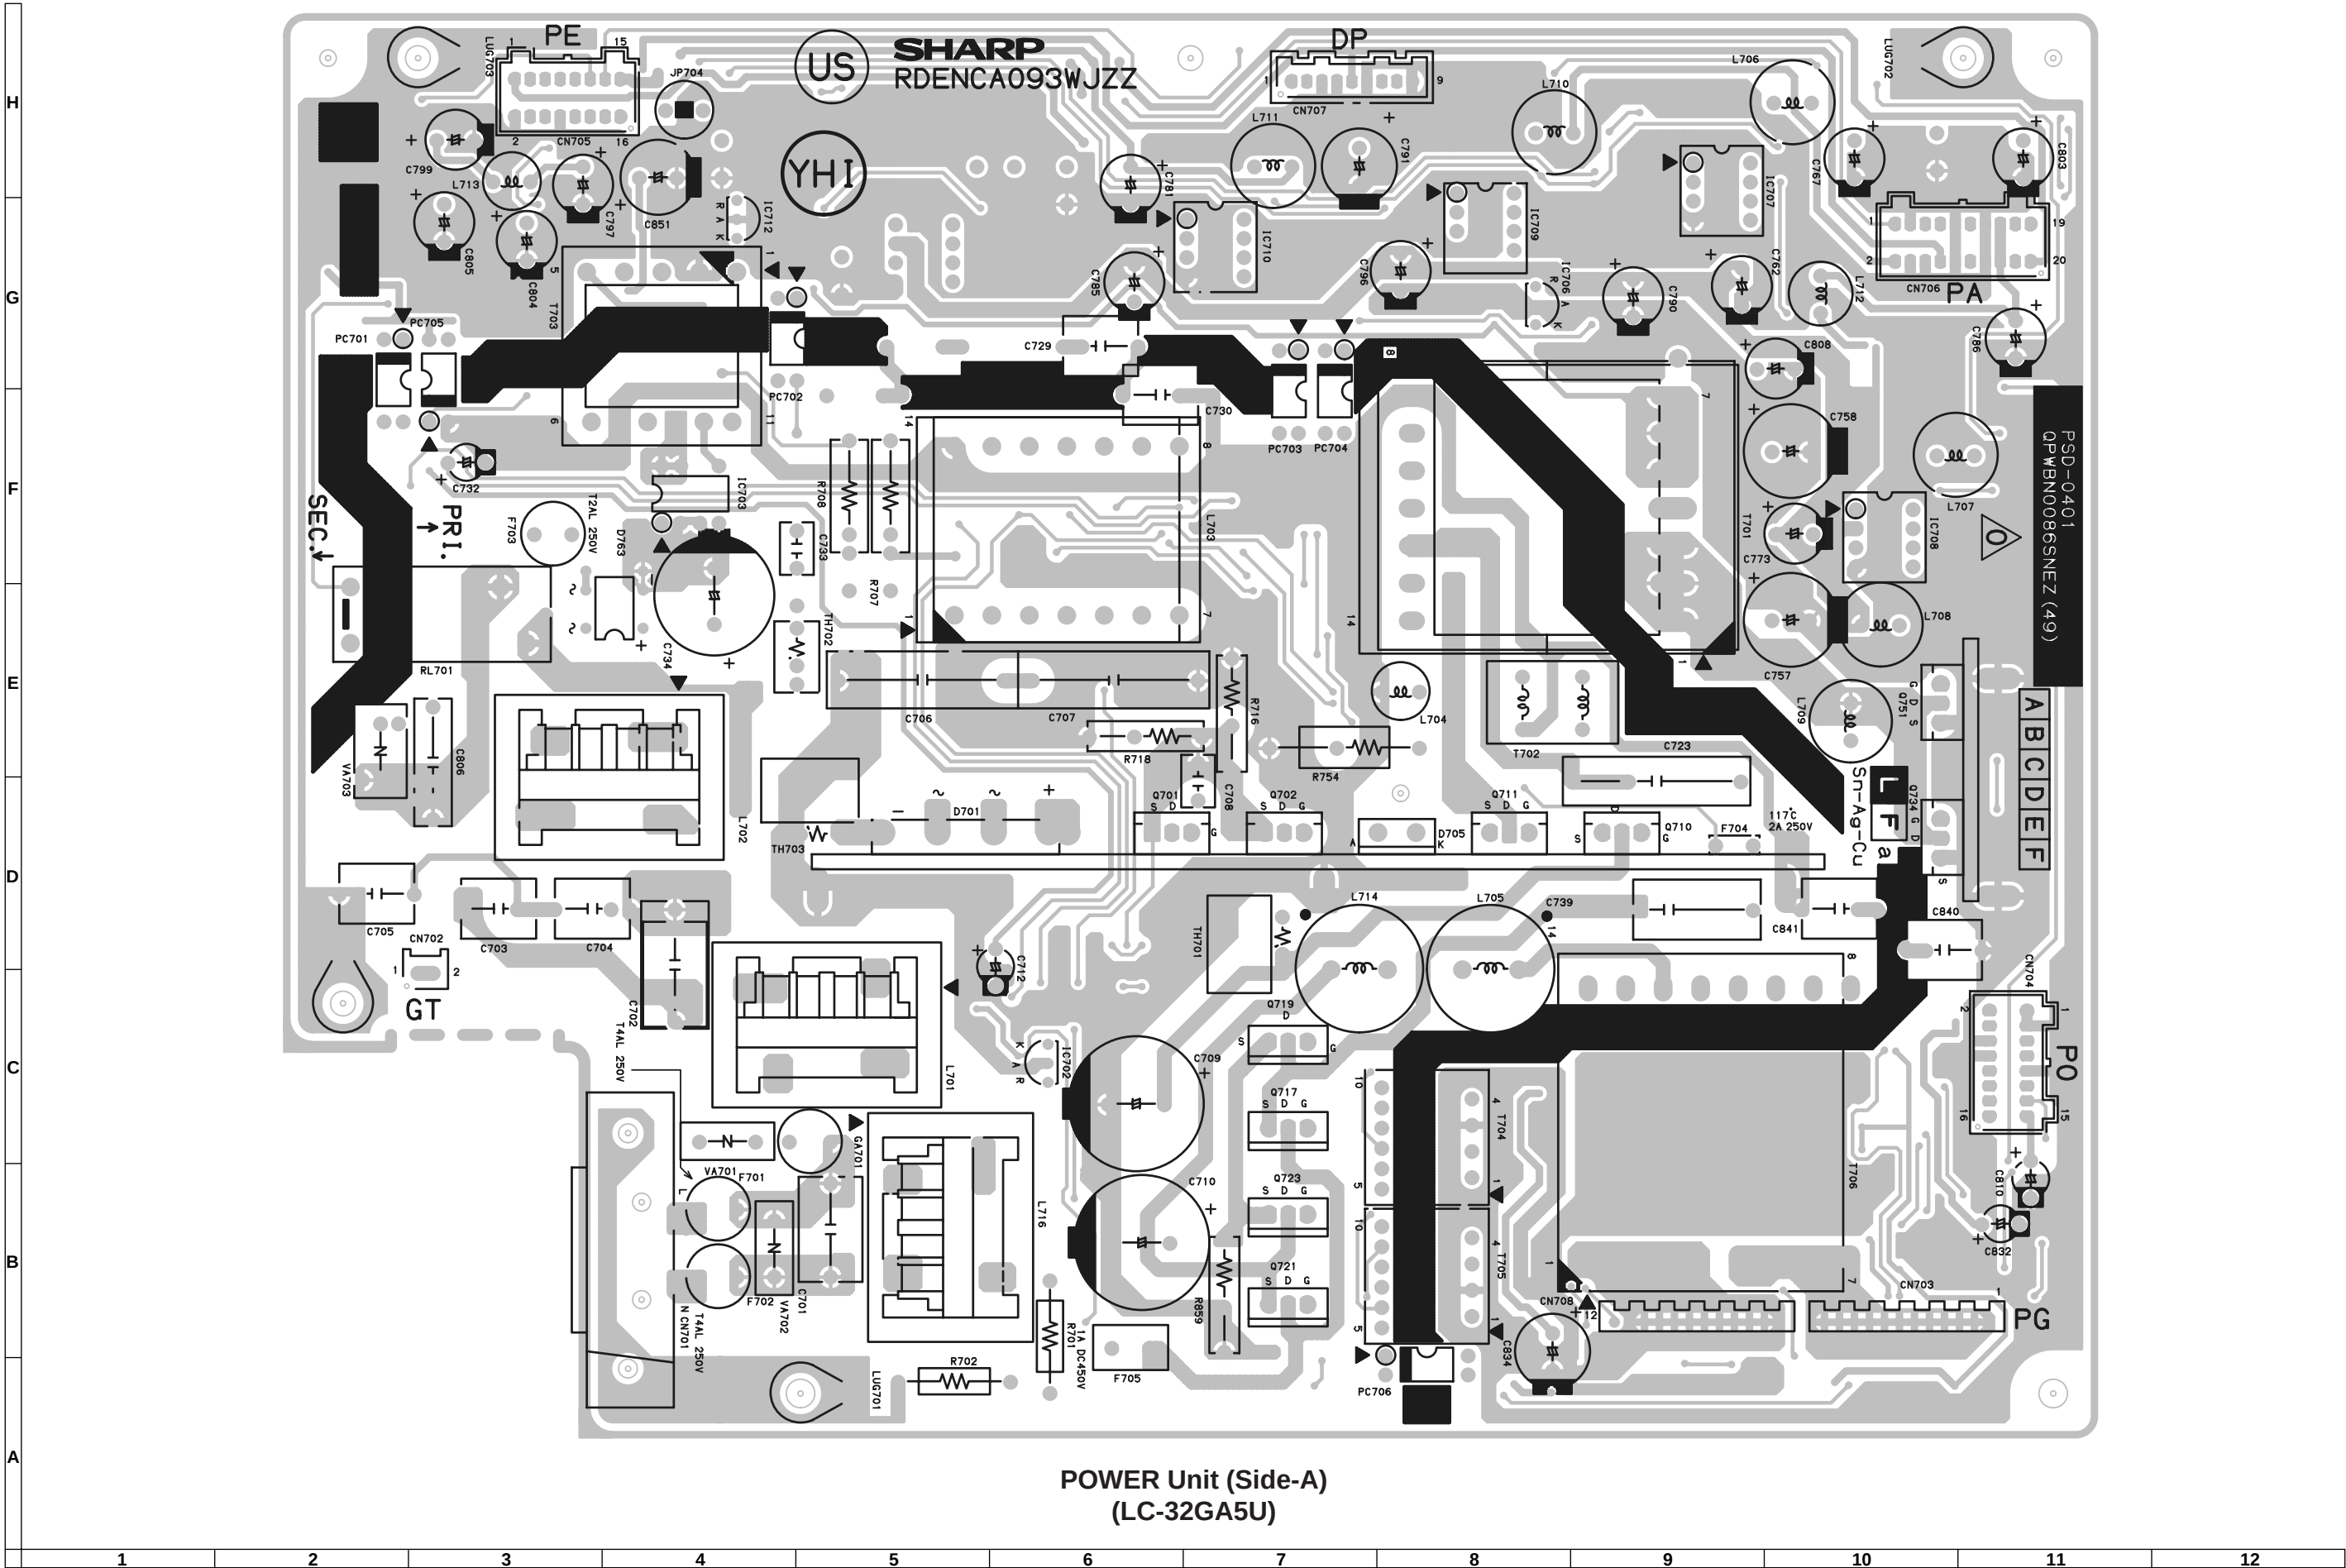


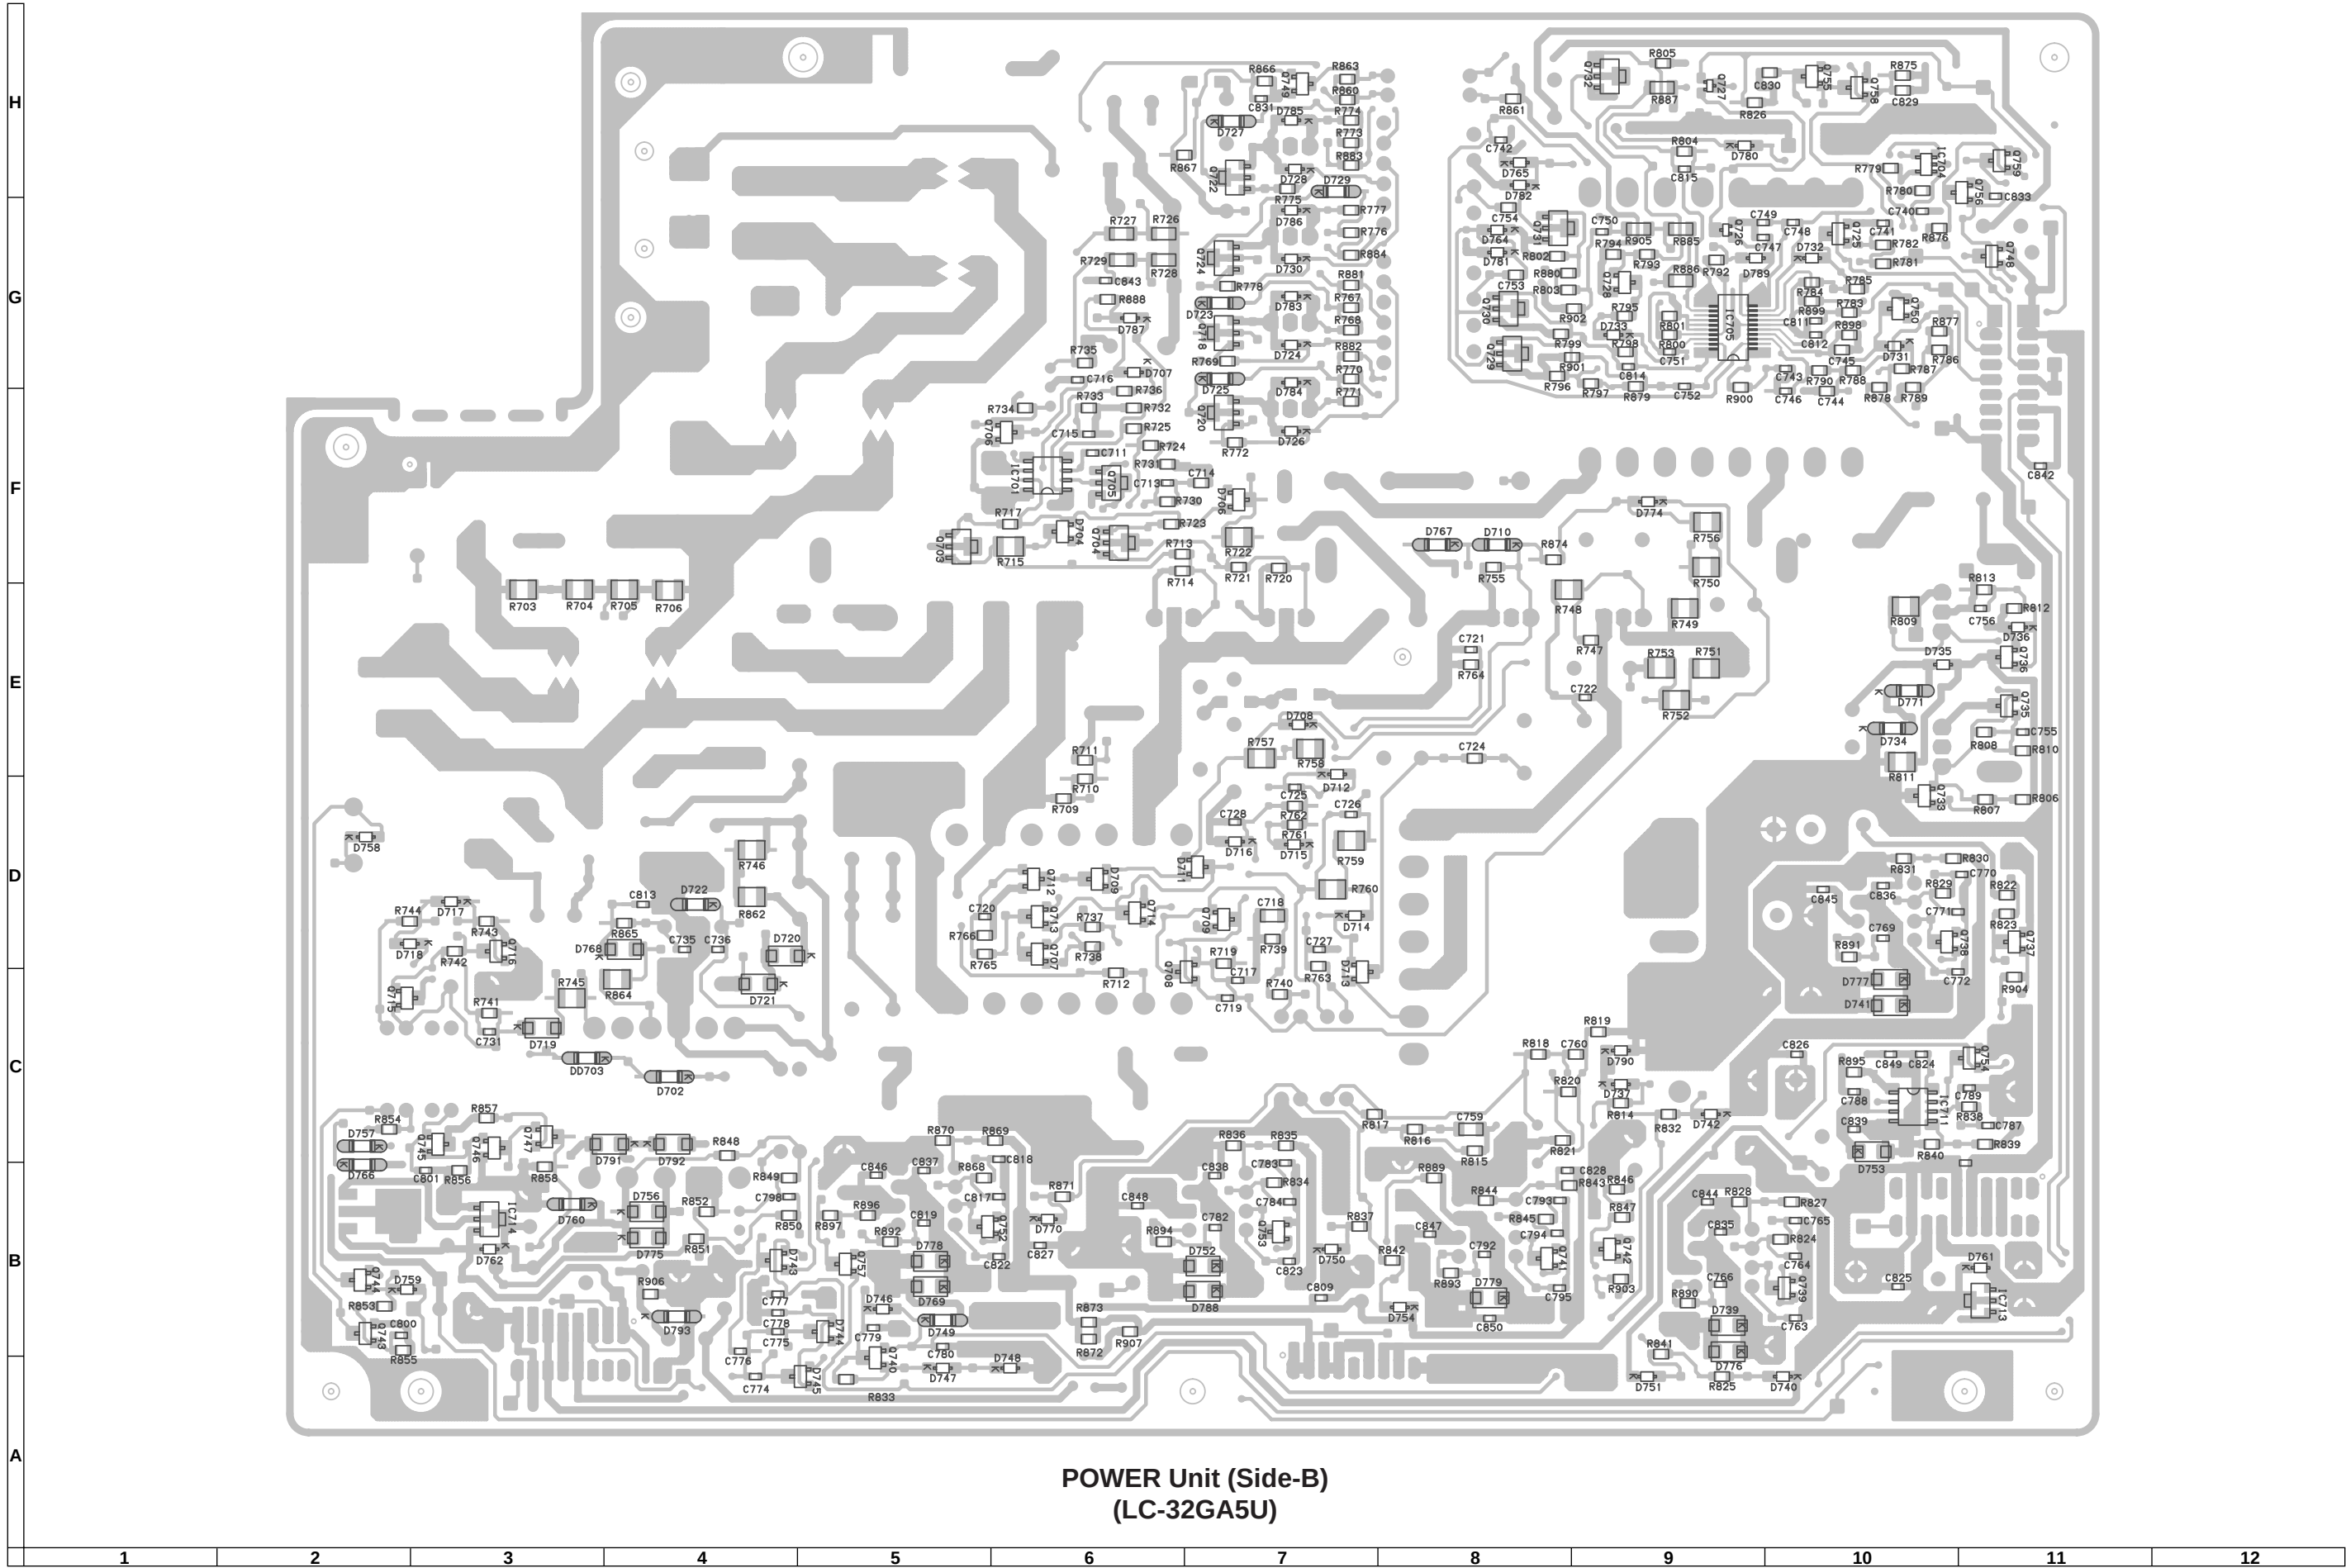


POWER Unit (Side-B)
(LC-32GA5U)

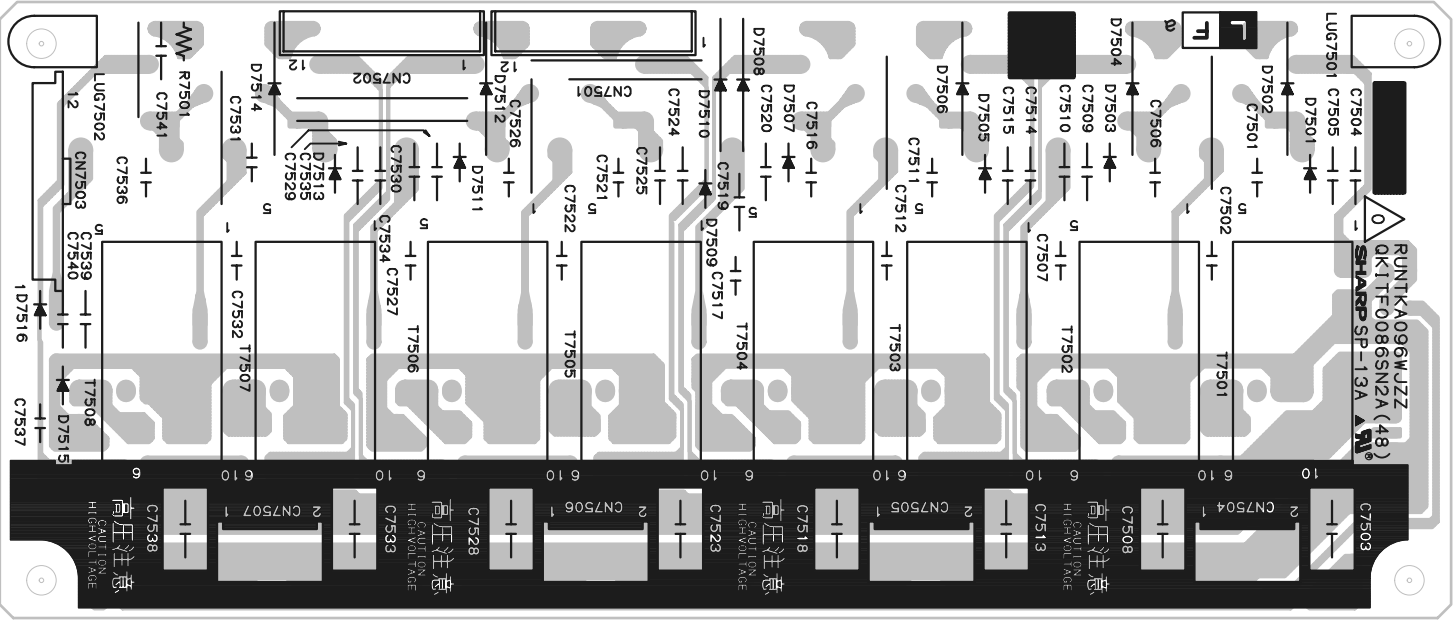

INVERTER-1 Unit (Component Side (LC-32GA5U))

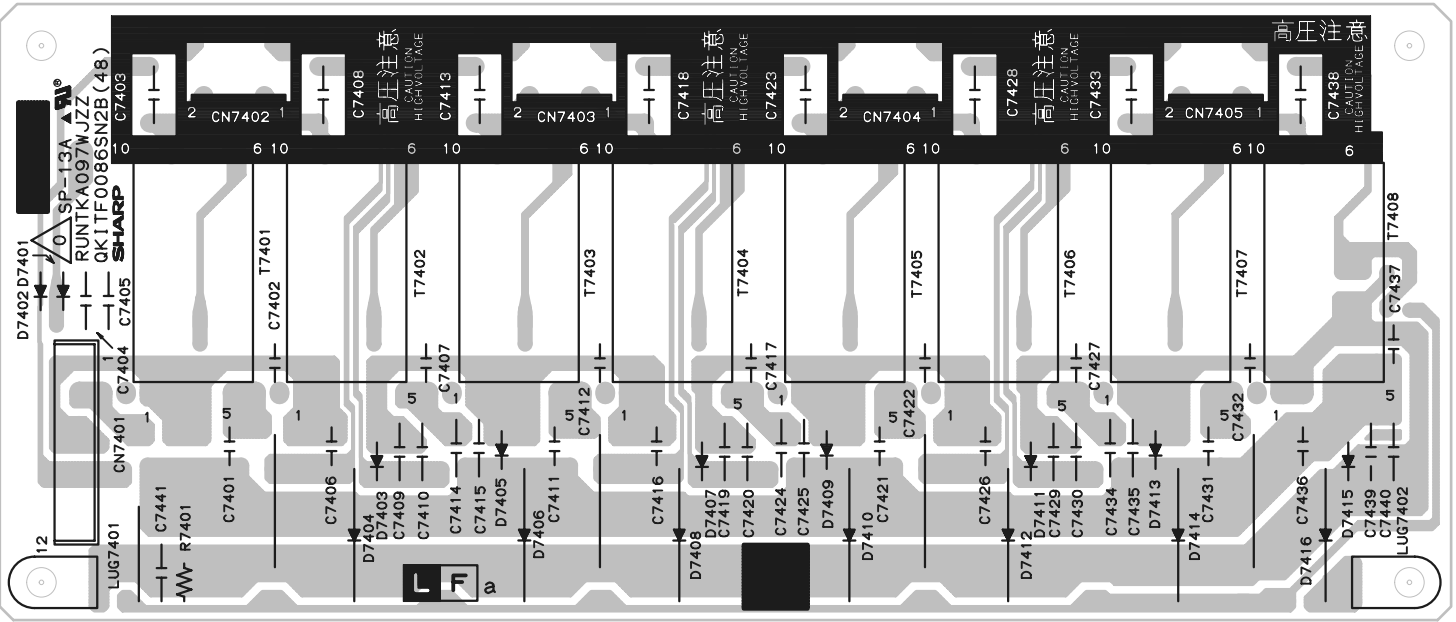


INVERTER-2 Unit (Component Side)

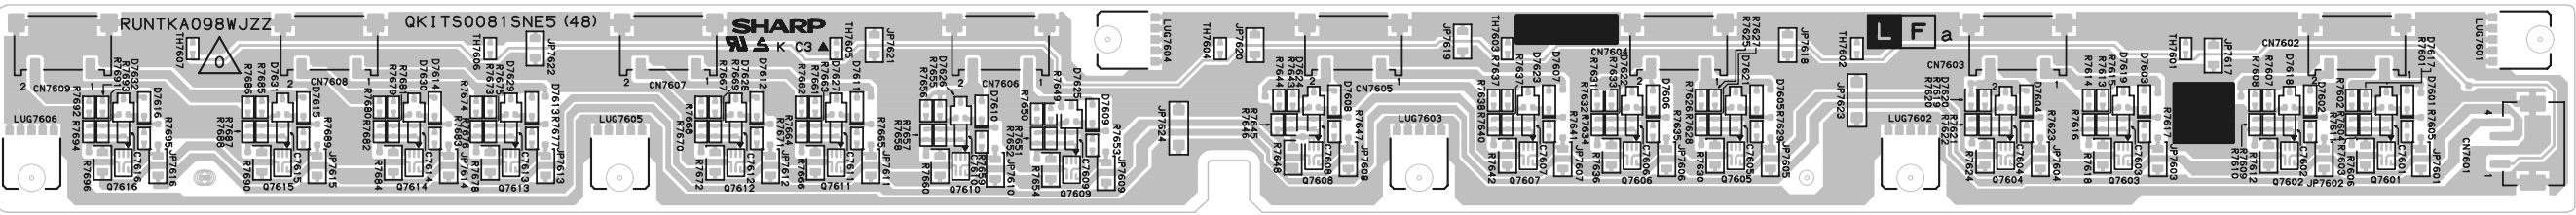


INVERTER-GND Unit (Component Side) (LC-32GA5U)

H

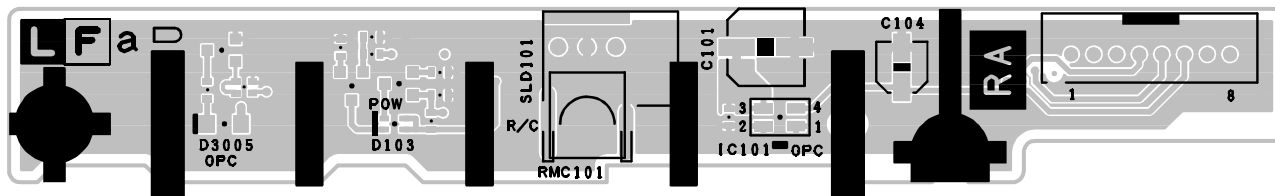


R/C, LED Unit (Component Side)

G

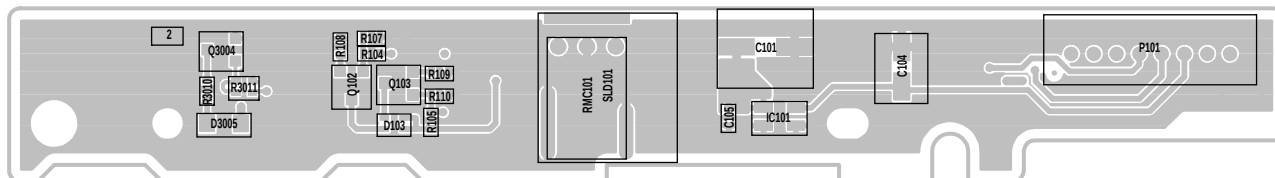

R/C, LED Unit (Chip Parts Side)

F

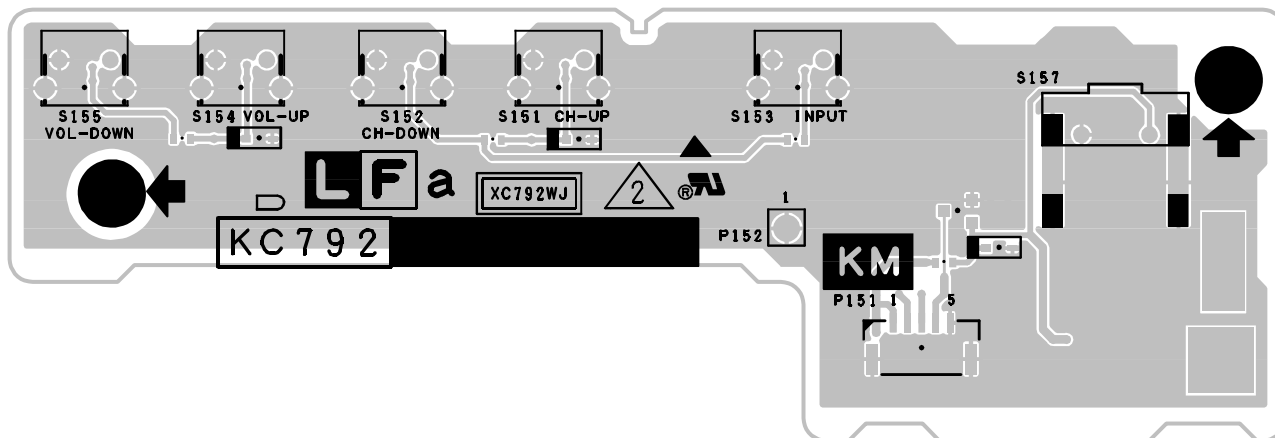


KEY Unit (Component Side)
(QPWBXC791WJN2)

E

D

C

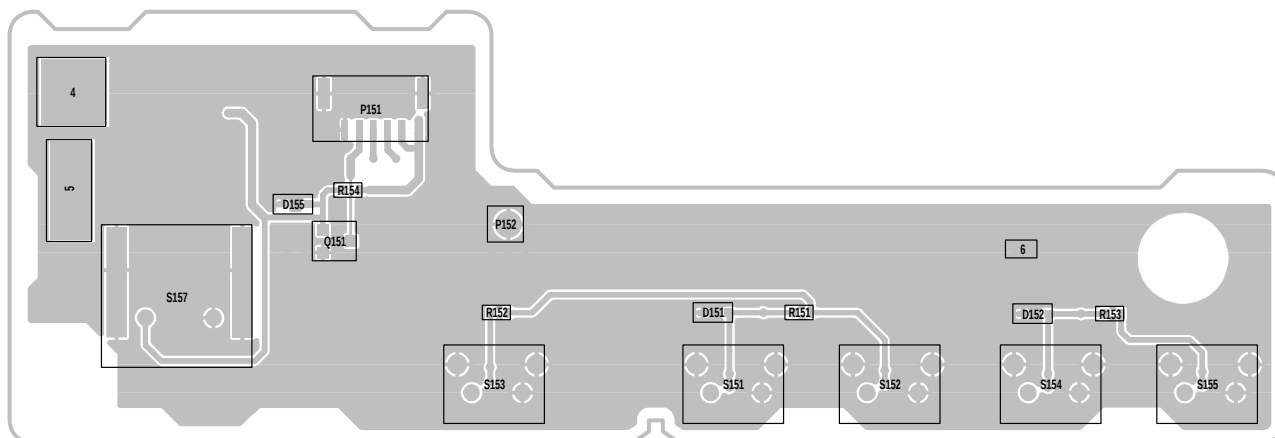

KEY Unit (Chip Parts Side)
(QPWBXC791WJN2)

B

A

1

2

3

4

5

6

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual; electrical components having such features are identified by  and shaded areas in the Replacement Parts Lists and Schematic Diagrams. The use of a substitute replacement part which does not have the same safety characteristic as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

"HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

- | | |
|-----------------|----------------|
| 1. MODEL NUMBER | 2. REF. NO. |
| 3. PART NO. | 4. DESCRIPTION |

in **USA**: Contact your nearest SHARP Parts Distributor to order.
For location of SHARP Parts Distributor, Please call Toll-Free; 1-800-BE-SHARP

★ MARK: SPARE PARTS-DELIVERY SECTION

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)

LC-26GA5U

DUNTKC790WEV2	—	AV Unit	—
DUNTKC791WEV0	—	R/C, LED Unit	—
DUNTKC792WEV0	—	KEY Unit	—
DUNTKC793FE21	—	LCD CONTROL Unit	—
DUNTKC794FE01	—	MAIN Unit	—
DUNTKC796FE11	—	CPU Unit	—
RUNTKA094WJZZ	—	INVERTER Unit	—
RUNTKA095WJZZ	—	INVERTER-GND Unit	—
RDENCA092WJZZ	—	POWER Unit	—

LC-32GA5U

DUNTKC790WEV2	—	AV Unit	—
DUNTKC791WEV0	—	R/C, LED Unit	—
DUNTKC792WEV0	—	KEY Unit	—
DUNTKC793FE22	—	LCD CONTROL Unit	—
DUNTKC794FE01	—	MAIN Unit	—
DUNTKC796FE12	—	CPU Unit	—
RUNTKA096WJZZ	—	INVERTER-1 Unit	—
RUNTKA097WJZZ	—	INVERTER-2 Unit	—
RUNTKA098WJZZ	—	INVERTER-GND Unit	—
RDENCA093WJZZ	—	POWER Unit	—

LCD PANEL

NOTE: THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY.

RLCDDTA039WJZZ	J	26" LCD Panel Unit (LC-26GA5U)	DQ
RLCDDTA037WJZZ	J	32" LCD Panel Unit (LC-32GA5U)	

ERSATZTEILLISTE

AUSTAUSCH VON TEILEN

Les pièces de rechange qui présentent ces caractéristiques spéciales de sécurité, sont identifiées dans ce manuel : les pièces électriques qui présentent ces particularités, sont repérées par la marque  et sont hachurées dans les listes de pièces et dans les diagrammes schématiques.

La substitution d'une pièce de rechange par une autre qui ne présente pas les mêmes caractéristiques de sécurité, peut provoquer une électrocution, un incendie ou tout autre sinistre.

"COMMENT COMMANDER LES PIÈCES DE RECHANGE"

Pour que votre commande soit rapidement et correctement remplie, veuillez fournir les renseignements suivants.

- | | |
|---------------------|----------------|
| 1. NUMERO DU MODELE | 2. NO. DE REF |
| 3. NO. DE PIECE | 4. DESCRIPTION |

in **CANADA**: Contact SHARP Electronics of Canada Limited
Phone (416) 890-2100

★ MARKIERUNG : ERSATZTEILE-LIEFERUNG

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

DUNTKC790WEV2 AV UNIT

TUNER

NOTE: THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY.

TU1101	VTUATMQH2-004	J	Tuner	BC
--------	---------------	---	-------	----

INTEGRATED CIRCUITS

IC1101	VHIPQ050DZ1-1Y	J	PQ050DZ01Z	AE
IC1102	VHIM62320FP-1Y	J	M62320FP	AH
IC1103	VHIBA7655AF-1Y	J	BA7655AF	AG
IC1105	VHIM62334FP-1Y	J	M62334FP	AH
IC1900	VHSI907+-1Y	J	SII907BCQG52	BG
IC1901	VHIAD8185+-1Y	J	AD8185ARU	AW
IC1902	VHILM2664+-1Y	J	LM2664M6X	AK
IC1903	VHIVHCT125A-1Y	J	TC74VHCT125AFT	AE
IC1904	VHINC7WZ14P-1Y	J	NC7WZ14P6X	AD
IC1911	VHI24LC2BiN2ES	J	24LC02B-I/5N	AH
IC1912	VHSI9993+-1Q	J	SII9993CTG100	BF
IC1913	VHI24LC2BiN2ES	J	24LC02B-I/5N	AH
IC1914	VHIM62320FP-1Y	J	M62320FP	AH
IC1915	VHI24LC21-15ES	J	24LC21T-I/5N	AK
IC1916	VHIPQ1R33/-1Y	J	PQ1R33	AE
IC1917	VHIPC9559+-1Y	J	PCA9559PW	AN
IC1918	VHITC4053BT-1Y	J	TC4053BFT	AG
IC2501	RH-IX3370CEN1Q	J	MSP3440G-QA-B8	AY
IC2502	VHITA2024+-1Y	J	TA2024	AX
IC2503	VHIBD4742G+-1Y	J	BD4742G-TR	AD
IC2504	VHIBA4560F+-1Y	J	BA4560F-E2	AD
IC2507	VHIBA4560F+-1Y	J	BA4560F-E2	AD
IC2700	VHINJU26150-1Q	J	NJU26150FR1	AV
IC2701	VHINJU26106-1Q	J	NJU26106FR1	AT
IC2702	VHIAK4586VQ-1Q	J	AK4586VQ	AY
IC2703	RH-IXA167WJZZY	J	PQ025EZ01ZZ	AL
IC2704	VHIPQ1R30+-1Y	J	PQ1R30	AD
IC2706	RH-IXA899WJN1Y	J	AT24C64AN-10SI	AL
IC3104	VHIUPD4721G-1Y	J	UPD4721GS-GJG	AN
IC3800	VHIMM1630AQ-1Q	J	MM1630AQ	AU
IC3802	VHILTC1694C-1Y	J	LTC1694CS5#TR	AM
IC3805	VHINJM2750M-1Y	J	NJM2750M(Te2)	
IC3808	VHIM62320FP-1Y	J	M62320FP	AH
IC3809	VHIM62320FP-1Y	J	M62320FP	AH
IC5701	VHIPQ09DZ1U-1Y	J	PQ09DZ1U	AG
IC5702	VHIBA08SFP+-1Y	J	BA08SFP-E2	AG

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

DUNKC790WEV2
AV UNIT (Continued)

IC5705	VHIBA033FP/-1Y	J	BA033FP-E2	AG
IC5706	VHiPQ05DZ1U-1Y	J	PQ05DZ1U	AG

TRANSISTORS

Q1102	VSDTC314TK/-1Y	J	DTC314TK	AC
Q1103	VSDTC314TK/-1Y	J	DTC314TK	AC
Q1104	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1105	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1106	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1111	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1112	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1113	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1114	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1115	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1130	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1132	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1145	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1148	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1203	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1204	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1900	VSDTC144EE/-1Y	J	DTC144EE	AA
Q1901	VS2SK536///-1Y	J	2SK536	AE
Q1902	VS2SK536///-1Y	J	2SK536	AE
Q1903	VS2SK536///-1Y	J	2SK536	AE
Q1904	VS2SK536///-1Y	J	2SK536	AE
Q1905	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1906	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1907	VSIMD2A///-1Y	J	IMD2A	AC
Q2501	VSDTC314TK/-1Y	J	DTC314TK	AC
Q2502	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q2503	VSRT1N441U/-1Y	J	RT1N441U	AB
Q2506	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q2509	VSRT1P441U/-1Y	J	RT1P441U	AB
Q2510	VSRT1N441U/-1Y	J	RT1N441U	AB
Q2513	VSRT1P441U/-1Y	J	RT1P441U	AB
Q2515	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q2516	VSRT1N141U/-1Y	J	RT1N141U	AB
Q2517	VSRT1N141U/-1Y	J	RT1N141U	AB
Q2702	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q2703	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q3800	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q3801	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q3802	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q3807	VSDTA114EKA-1Y	J	DTA114EKA	AB
Q3810	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q3811	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q3812	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q3813	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q5706	VSRT1N141U/-1Y	J	RT1N141U	AB
Q5707	VS2SC3928AR-1Y	J	2SC3928AR	AB

DIODES

D1105	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1106	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1107	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1108	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1110	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1111	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1113	RH-EX1234CEZZY	J	Zener Diode, 3.6V	AE
D1116	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1117	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1118	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1120	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1121	RH-EX1400CEZZY	J	Zener Diode, 10V	AB
D1128	RH-EX0674GEZZY	J	Zener Diode, 33V	AB
D1129	VHD1SS355// -1Y	J	Diode	AB
D1130	RH-EX1395CEZZY	J	Zener Diode, 6.2V	AC
D1900	VHDMA3120WA-1Y	J	Diode	AD
D1901	VHDMA3120WA-1Y	J	Diode	AD
D1902	VHDMA3120WA-1Y	J	Diode	AD
D1903	RH-EX1247CEZZY	J	Zener Diode, 5.6V	AB

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

D1904 RH-EX1247CEZZY J Zener Diode, 5.6V AB
D1905 VHD1SS355// -1Y J Diode AB
D1906 VHDDAN202K/-1Y J Diode AB
D1907 RH-EX1250CEZZY J Zener Diode, 6.2V AB
D1908 RH-EX1250CEZZY J Zener Diode, 6.2V AB
D1909 VHDDAN202K/-1Y J Diode AB
D1910 VHD1SS355// -1Y J Diode AB
D1913 VHD1SS355// -1Y J Diode AB
D2501 RH-EX1283CEZZY J Zener Diode, 18V AB
D2502 VHDDAN222// -1Y J Diode AA
D2503 VHD1SS355// -1Y J Diode AB
D2504 VHD1SS355// -1Y J Diode AB
D2505 VHD1SS355// -1Y J Diode AB
D2506 RH-EX1283CEZZY J Zener Diode, 18V AB
D2507 VHD1SS355// -1Y J Diode AB
D2508 VHD1SS355// -1Y J Diode AB
D2509 VHD1SS355// -1Y J Diode AB
D2512 RH-EX1283CEZZY J Zener Diode, 18V AB
D2513 RH-EX1283CEZZY J Zener Diode, 18V AB
D2514 VHDLi114+++ -1Y J Diode AC
D2515 VHDLi114+++ -1Y J Diode AC
D2516 VHDLi114+++ -1Y J Diode AC
D2517 VHDLi114+++ -1Y J Diode AC
D2519 VHD1SS355// -1Y J Diode AB
D3104 VHDMA3120WA-1Y J Diode AD
D3105 VHDMA3120WA-1Y J Diode AD
D3801 RH-EX1400CEZZY J Zener Diode, 10V AB
D3804 RH-EX1400CEZZY J Zener Diode, 10V AB
D3805 RH-EX1400CEZZY J Zener Diode, 10V AB
D3806 RH-EX1400CEZZY J Zener Diode, 10V AB
D3807 RH-EX1400CEZZY J Zener Diode, 10V AB
D3813 VHDDAN217U+ -1Y J Diode AB
D3814 VHDDAN217U+ -1Y J Diode AB
D3815 VHDDAN217U+ -1Y J Diode AB
D3816 VHD1SS355// -1Y J Diode AB
D3817 VHD1SS355// -1Y J Diode AB
D3820 VHDDAN217U+ -1Y J Diode AB
D3821 VHDDAN217U+ -1Y J Diode AB
D3822 VHDDAN217U+ -1Y J Diode AB
D5701 RH-EX1400CEZZY J Zener Diode, 10V AB
D5702 RH-EX1400CEZZY J Zener Diode, 10V AB

PACKAGED CIRCUITS

X2501	RCRSB0307CEZZ	J	Crystal	AG
X2700	RCRSCA090WJZZY	J	Crystal, 36.864MHz	
X2701	RCRSCA090WJZZY	J	Crystal, 36.864MHz	
X2702	RCRSCA089WJZZY	J	Crystal, 12.288MHz	

FILTERS AND COILS

FL1901	RCiLFA134WJZZY	J	Coil	
FL1902	RCiLFA134WJZZY	J	Coil	
FL1903	RCiLFA134WJZZY	J	Coil	
FL1904	RCiLFA134WJZZY	J	Coil	
L1101	VPD9M100KR86NY	J	Peaking 10μH	AC
L1104	VPD9M1R0MR20NY	J	Peaking 1μH	AB
L1105	VPD9M1R0MR20NY	J	Peaking 1μH	AB
L2501	RCiLPA001WJZZY	J	Coil	AF
L2502	VPD9M4R7MR53NY	J	Peaking 4.7μH	AB
L2503	RCiLPA001WJZZY	J	Coil	AF
L2504	RCiLPA001WJZZY	J	Coil	AF
L2505	RCiLPA001WJZZY	J	Coil	AF

CAPACITORS

C1100	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C1101	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C1102	VCAAPF0JJ107MY	J	100 6.3V Electrolytic	AF
C1103	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C1105	VCEASX1CN476MY	J	47 16V Electrolytic	AC
C1106	VCAAPF1CJ396MY	J	39 16V Electrolytic	AF
C1112	RC-KZA154WJZZY	J	4.7 16V Ceramic	
C1120	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C1121	RC-KZA154WJZZY	J	4.7 16V Ceramic	
C1123	VCKYTV1CB105KY	J	1 16V Ceramic	AC
C1125	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
C1129	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC790WEV2									
AV UNIT (Continued)									
C1133	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1920	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1134	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1921	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C1135	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1922	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1136	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1923	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1137	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1924	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C1138	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1925	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C1139	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1926	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1140	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1927	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1141	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1928	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1142	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1929	RC-KZA074WJZZY	J 4.7	16V Ceramic	AC
C1143	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1930	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1144	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1931	RC-KZA074WJZZY	J 4.7	16V Ceramic	AC
C1145	VCEASY1CN477MY	J 470	16V Electrolytic	AD	C1932	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1146	VCEASY1CN477MY	J 470	16V Electrolytic	AD	C1933	RC-KZA074WJZZY	J 4.7	16V Ceramic	AC
C1147	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1934	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1148	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1935	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C1149	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1936	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1150	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB	C1937	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1151	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB	C1938	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1152	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1939	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C1153	VCCCCY1HH330JY	J 33p	50V Ceramic	AA	C1940	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1154	VCCCCY1HH330JY	J 33p	50V Ceramic	AA	C1941	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1155	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1942	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C1156	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1943	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1157	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1944	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1159	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1945	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C1160	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1946	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1161	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1947	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1162	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1948	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1163	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1949	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1164	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1950	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1165	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C1951	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1166	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1952	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1170	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1953	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1171	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1954	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C1173	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1955	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C1174	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1956	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C1175	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1957	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C1179	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1958	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C1181	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1959	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C1182	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1960	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1193	VCEASX1CN476MY	J 47	16V Electrolytic	AC	C1961	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1195	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1962	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C1196	VCEASY1CN107MY	J 100	16V Electrolytic	AC	C1963	VCCCCY1HH470JY	J 47p	50V Ceramic	AA
C1200	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1964	VCCCCY1HH470JY	J 47p	50V Ceramic	AA
C1209	VCEASY1HN226MY	J 22	50V Electrolytic	AC	C1975	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1226	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	C1976	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C1227	VCKYCY1HB182KY	J 1800p	50V Ceramic	AA	C1977	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1228	VCKYCY1HB152KY	J 1500p	50V Ceramic	AA	C1978	VCCCCY1HH560JY	J 56p	50V Ceramic	AB
C1229	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C1979	VCCCCY1HH560JY	J 56p	50V Ceramic	AB
C1230	VCKYCY1HB822KY	J 8200p	50V Ceramic	AB	C1980	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1900	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1981	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1901	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1982	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C1902	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1983	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C1903	VCEASX1CN476MY	J 47	16V Electrolytic	AC	C1984	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1904	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1985	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C1905	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1986	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1906	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1987	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1907	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1988	VCKYCY1EB473KY	J 0.047	25V Ceramic	AA
C1908	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1989	RC-KZA073WJZZY	J 10	16V Ceramirc	AD
C1909	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1990	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1910	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1991	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1911	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1992	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1912	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1993	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1913	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1994	VCKYCY1AB105KY	J 1	10V Ceramic	AB
C1914	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1995	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1915	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1996	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1916	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C1997	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C1917	RC-KZA073WJZZY	J 10	16V Ceramirc	AD	C1998	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C1918	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C1999	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1919	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C2501	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
					C2502	VCEASY1CN107MY	J 100	16V Electrolytic	AC
					C2503	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
					C2504	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
					C2505	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
DUNTKC790WEV2				
AV UNIT (Continued)				
C2506	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2507	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2508	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2509	RC-KZA154WJZZY	J 4.7	16V Ceramic	AA
C2510	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C2511	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C2512	VCKYCY1HB682KY	J 6800p	50V Ceramic	AA
C2513	VCKYCY1HB682KY	J 6800p	50V Ceramic	AA
C2514	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2515	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2516	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C2517	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C2518	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2519	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C2520	VCCCCY1HH560JY	J 56p	50V Ceramic	AB
C2521	VCEASX1HN335MY	J 3.3	50V Electrolytic	AB
C2522	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2523	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2524	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2525	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2526	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2527	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2528	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C2529	VCCCCY1HH471JY	J 470p	50V Ceramic	AA
C2530	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C2531	VCCCCY1HH560JY	J 56p	50V Ceramic	AB
C2532	VCCCCY1HH560JY	J 56p	50V Ceramic	AB
C2533	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2534	VCCCCY1HH3R0CY	J 3p	50V Ceramic	AA
C2535	VCCCCY1HH3R0CY	J 3p	50V Ceramic	AA
C2536	VCEASY1CN477MY	J 470	16V Electrolytic	AD
C2537	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2538	VCEASY1CN227MY	J 220	16V Electrolytic	AC
C2539	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2541	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2542	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2543	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2544	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2545	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2546	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2547	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2548	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2549	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2550	VCKYTV1EB474KY	J 0.47	25V Ceramic	AC
C2551	VCKYTV1EB474KY	J 0.47	25V Ceramic	AC
C2552	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C2553	VCKYTV1EB474KY	J 0.47	25V Ceramic	AC
C2554	VCKYTV1HB104KY	J 0.1	50V Ceramic	AA
C2555	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2556	VCKYTV1EB474KY	J 0.47	25V Ceramic	AC
C2557	VCKYTV1EB474KY	J 0.47	25V Ceramic	AC
C2558	VCKYTV1EB474KY	J 0.47	25V Ceramic	AC
C2560	VCKYTV1HB104KY	J 0.1	50V Ceramic	AA
C2561	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C2562	VCKYCY1HF223ZY	J 0.022	50V Ceramic	AB
C2563	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2564	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2565	VCCCCY1HH151JY	J 150p	50V Ceramic	AA
C2566	VCCCCY1HH151JY	J 150p	50V Ceramic	AA
C2570	VCCCCY1HH470JY	J 47p	50V Ceramic	AA
C2571	VCCCCY1HH470JY	J 47p	50V Ceramic	AA
C2577	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C2579	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C2580	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2581	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2583	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C2584	RC-KZ0075TAZZY	J 2.2	16V Ceramic	AC
C2585	RC-KZ0075TAZZY	J 2.2	16V Ceramic	AC
C2586	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C2587	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2588	VCEASX1CN476MY	J 47	16V Electrolytic	AC

Ref. No.	Part No.	★	Description	Code
C2589	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C2595	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C2700	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C2701	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C2702	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C2703	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2704	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2705	VCCCCY1HH6R0DY	J 6p	50V Ceramic	AA
C2706	VCCCCY1HH6R0DY	J 6p	50V Ceramic	AA
C2707	VCKYCY1HB153KY	J 0.015	50V Ceramic	AA
C2708	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2709	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2710	VCEASY1CN476MY	J 47	16V Electrolytic	AC
C2711	RC-KZA154WJZZY	J 4.7	16V Ceramic	AA
C2712	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C2713	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C2714	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2715	VCCCCY1HH220JY	J 22p	50V Ceramic	AA
C2716	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2717	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2718	VCCCCY1HH6R0DY	J 6p	50V Ceramic	AA
C2719	VCCCCY1HH6R0DY	J 6p	50V Ceramic	AA
C2720	VCKYCY1HB153KY	J 0.015	50V Ceramic	AA
C2721	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2722	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2723	VCEASY1CN476MY	J 47	16V Electrolytic	AC
C2724	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C2725	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C2726	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2727	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2728	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2729	VCKYCY1HB153KY	J 0.015	50V Ceramic	AA
C2730	VCKYCY1HB153KY	J 0.015	50V Ceramic	AA
C2731	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C2732	VCAAPF1CJ396MY	J 39	16V Electrolytic	AF
C2733	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2734	RC-KZA154WJZZY	J 4.7	16V Ceramic	AA
C2751	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2753	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2761	VCCCCY1HH180JY	J 18p	50V Ceramic	AA
C2762	VCCCCY1HH180JY	J 18p	50V Ceramic	AA
C2763	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2764	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2765	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C2766	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2767	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2771	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2772	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2773	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2774	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2775	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C2776	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C2777	RC-KZ0075TAZZY	J 2.2	16V Ceramic	AC
C2778	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2779	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2780	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2781	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2782	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2783	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2784	RC-KZA113WJZZY	J 4.7	16V Ceramic	AB
C2900	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2901	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C2902	VCAAPE0JJ107MY	J 100	6.3V Electrolytic	AE
C2903	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2904	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C2905	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C2906	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2907	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2908	VCAAPE0JJ227MY	J 220	6.3V Electrolytic	AE
C2909	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2910	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C2911	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2912	VCAAPC1AJ336MY	J 33	10V Electrolytic	AG
C2913	VCEASX1CN476MY	J 47	16V Electrolytic	AC
C2914	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC790WEV2					RESISTORS				
AV UNIT (Continued)					R1100	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
C2915	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1101	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
C2916	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1102	VRS-CY1JF680JY	J	68 1/16W Metal Oxide	AA
C3133	VCEASX1HN225MY	J	2.2 50V Electrolytic	AB	R1104	VRS-CJ1JF220JY	J	22 1/16W Metal Oxide	AA
C3134	VCEASX1HN225MY	J	2.2 50V Electrolytic	AB	R1105	VRS-CY1JF561JY	J	560 1/16W Metal Oxide	AA
C3135	VCEASX1HN225MY	J	2.2 50V Electrolytic	AB	R1106	VRS-CY1JF331JY	J	330 1/16W Metal Oxide	AA
C3136	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1107	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
C3137	VCEASX1CN106MY	J	10 16V Electrolytic	AC	R1108	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
C3138	VCEASX1HN225MY	J	2.2 50V Electrolytic	AB	R1109	VRS-CY1JF182JY	J	1.8k 1/16W Metal Oxide	AA
C3139	VCEASX1HN225MY	J	2.2 50V Electrolytic	AB	R1110	VRS-CY1JF683JY	J	68k 1/16W Metal Oxide	AA
C3801	VCEASX1CN106MY	J	10 16V Electrolytic	AC	R1111	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
C3802	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1112	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
C3803	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1113	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
C3804	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1115	VRS-CY1JF561JY	J	560 1/16W Metal Oxide	AA
C3806	RC-KZA154WJZZY	J	4.7 16V Ceramic	AA	R1132	VRS-CY1JF182JY	J	1.8k 1/16W Metal Oxide	AA
C3807	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R1133	VRS-CY1JF222JY	J	2.2k 1/16W Metal Oxide	AA
C3808	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1134	VRS-CY1JF222JY	J	2.2k 1/16W Metal Oxide	AA
C3809	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1135	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
C3810	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1136	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3811	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1137	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3812	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1138	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3815	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1139	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3816	VCEASX1CN226MY	J	22 16V Electrolytic	AC	R1143	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
C3817	RC-KZA073WJZZY	J	10 16V Ceramic	AD	R1145	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
C3821	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R1146	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
C3822	VCAAPF1CJ396MY	J	39 16V Electrolytic	AF	R1147	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
C3826	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1148	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
C3827	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1149	VRS-CY1JF564JY	J	560k 1/16W Metal Oxide	AA
C3828	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1150	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
C3829	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1151	VRS-CY1JF221JY	J	220 1/16W Metal Oxide	AA
C3834	VCAAPF1CJ396MY	J	39 16V Electrolytic	AF	R1152	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
C3835	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1153	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3836	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1154	VRS-CY1JF274JY	J	270k 1/16W Metal Oxide	AA
C3839	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1155	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
C3840	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1156	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
C3841	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1157	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3842	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1158	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C3843	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1159	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
C3844	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1160	VRS-CY1JF221JY	J	220 1/16W Metal Oxide	AA
C3856	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1161	VRS-CY1JF221JY	J	220 1/16W Metal Oxide	AA
C3857	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1162	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
C3860	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1163	VRS-CJ1JF102JY	J	1k 1/16W Metal Oxide	AA
C3866	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1164	VRS-TV1JD000JY	J	0 1/10W Metal Oxide	AA
C3867	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1165	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
C3873	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1166	VRS-CY1JF564JY	J	560k 1/16W Metal Oxide	AA
C3874	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1167	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
C3876	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1168	VRS-CY1JF182JY	J	1.8k 1/16W Metal Oxide	AA
C3877	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1170	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
C3878	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1173	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
C3881	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1177	VRS-CJ1JF223JY	J	22k 1/16W Metal Oxide	AA
C3889	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1180	VRS-CJ1JF470JY	J	47 1/16W Metal Oxide	AA
C3896	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1183	VRS-CJ1JF223JY	J	22k 1/16W Metal Oxide	AA
C3897	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1185	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C5701	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1186	VRS-CY1JF223JY	J	22k 1/16W Metal Oxide	AA
C5702	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1188	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C5703	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1189	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
C5704	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1190	VRS-CY1JF222JY	J	2.2k 1/16W Metal Oxide	AA
C5705	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1192	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
C5706	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1193	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
C5707	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1194	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C5708	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1195	VRS-CY1JF123JY	J	12k 1/16W Metal Oxide	AA
C5721	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1196	VRS-CY1JF392JY	J	3.9k 1/16W Metal Oxide	AA
C5723	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1197	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
C5724	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA	R1198	VRS-TW2ED332JY	J	3.3k 1/4W Metal Oxide	AB
C5726	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA	R1199	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
C5727	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA	R1202	VRS-CY1JF333JY	J	33k 1/16W Metal Oxide	AA
C5729	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1204	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
C5730	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1205	VRS-CJ1JF470JY	J	47 1/16W Metal Oxide	AA
C5735	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1208	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA
C5736	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R1209	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
C5738	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1210	VRS-CY1JF221JY	J	220 1/16W Metal Oxide	AA
C5739	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R1211	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
					R1214	VRS-TQ2BD561JY	J	560 1/8W Metal Oxide	AA
					R1215	VRS-TQ2BD750JY	J	75 1/8W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNKC790WEV2				
AV UNIT (Continued)				
R1216	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1217	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1228	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1230	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R1232	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1233	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1234	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R1235	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1236	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R1238	VRS-CY1JF182JY	J 1.8k	1/16W Metal Oxide	AA
R1239	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1240	VRS-CY1JF562JY	J 5.6k	1/16W Metal Oxide	AA
R1242	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1243	VRS-TW2ED181JY	J 180	1/4W Metal Oxide	AA
R1244	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1245	VRS-TW2ED181JY	J 180	1/4W Metal Oxide	AA
R1246	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1247	VRS-TW2ED181JY	J 180	1/4W Metal Oxide	AA
R1253	VRS-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R1254	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1255	VRS-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R1256	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1257	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R1258	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1259	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1260	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1261	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1263	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R1289	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1290	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1291	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1292	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1293	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1304	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
R1307	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1308	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1310	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R1316	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1317	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1318	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1900	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA
R1901	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1902	VRS-CJ1JF220JY	J 22	1/16W Metal Oxide	AA
R1903	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1904	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1905	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1906	VRS-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R1907	VRS-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R1908	VRS-CY1JF181FY	J 180	1/16W Metal Oxide	AA
R1909	VRS-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R1910	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1911	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1912	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R1913	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1914	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R1915	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1916	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R1917	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1918	VRS-TQ2BD820JY	J 82	1/8W Metal Oxide	AA
R1919	VRS-TQ2BD820JY	J 82	1/8W Metal Oxide	AA
R1920	VRS-TQ2BD820JY	J 82	1/8W Metal Oxide	AA
R1921	VRS-CY1JF203JY	J 20k	1/16W Metal Oxide	AA
R1922	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R1923	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R1924	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R1925	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1926	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1927	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1928	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1929	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R1930	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R1931	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R1932	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1933	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1934	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1935	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1936	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1937	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1946	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1947	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1948	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1949	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1950	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R1951	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R1952	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R1953	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R1954	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1955	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1956	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1957	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1958	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1959	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R1960	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1961	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1962	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD
R1963	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R1964	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
R1965	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1966	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1967	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1968	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R1971	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA
R1972	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1973	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1974	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R1975	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R1978	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1979	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1981	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1986	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1987	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1988	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1989	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R1992	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1993	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1994	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1995	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1996	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1998	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1999	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2501	VRS-CJ1JF470JY	J 47	1/16W Metal Oxide	AA
R2502	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R2503	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2504	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2505	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2506	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R2507	VRS-CY1JF103FY	J 10k	1/16W Metal Oxide	AA
R2508	VRS-CY1JF103FY	J 10k	1/16W Metal Oxide	AA
R2509	VRS-CY1JF223FY	J 22k	1/16W Metal Oxide	AA
R2510	VRS-CY1JF223FY	J 22k	1/16W Metal Oxide	AA
R2511	VRS-CY1JF822FY	J 8.2k	1/16W Metal Oxide	AA
R2512	VRS-CJ1JF103JY	J 10k	1/16W Metal Oxide	AA
R2513	VRS-CJ1JF102JY	J 1k	1/16W Metal Oxide	AA
R2514	VRS-CY1JF183FY	J 18k	1/16W Metal Oxide	AA
R2515	VRS-CY1JF183FY	J 18k	1/16W Metal Oxide	AA
R2517	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2518	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2519	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R2520	VRS-CY1JF105FY	J 1M	1/16W Metal Oxide	AA
R2521	VRS-TW2HF100JY	J 10	1/2W Metal Oxide	AA
R2522	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R2523	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA
R2524	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R2525	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2526	VRS-CY1JF562JY	J 5.6k	1/16W Metal Oxide	AA
R2527	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC790WEV2					R2758	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
AV UNIT (Continued)					R2759	VRS-CY1JF273JY	J 27k	1/16W Metal Oxide	AA
R2528	VRS-TW2HF100JY	J 10	1/2W Metal Oxide	AA	R2760	VRS-CY1JF273JY	J 27k	1/16W Metal Oxide	AA
R2529	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA	R2761	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R2530	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA	R2762	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R2531	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2768	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2532	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA	R2770	VRS-CY1JF273JY	J 27k	1/16W Metal Oxide	AA
R2533	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2780	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2534	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2783	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2535	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA	R2784	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2537	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2785	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2538	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2900	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2539	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2901	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2540	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2904	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2541	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2905	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2542	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2906	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2543	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA	R2907	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2544	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R2908	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R2545	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA	R2913	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R2546	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R2916	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2547	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA	R2917	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R2548	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA	R2918	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R2549	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2919	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2550	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2924	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R2553	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2938	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2554	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2939	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2572	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA	R2940	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2573	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R2941	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2575	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA	R2942	VRS-CY1JF152FY	J 1.5k	1/16W Metal Oxide	AA
R2580	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R2945	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2581	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2949	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2582	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2950	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2583	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2951	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2584	VRS-CY1JF562JY	J 5.6k	1/16W Metal Oxide	AA	R3128	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2585	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R3130	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2586	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA	R3131	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2700	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3133	VRS-TV1JD101JY	J 100	1/10W Metal Oxide	AA
R2701	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3135	VRS-TV1JD101JY	J 100	1/10W Metal Oxide	AA
R2702	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3136	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2703	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3801	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2704	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA	R3802	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2705	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA	R3803	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2706	VRS-CJ1JF103JY	J 10k	1/16W Metal Oxide	AA	R3804	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2707	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA	R3805	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2708	VRS-CY1JF331JY	J 330	1/16W Metal Oxide	AA	R3806	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2709	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R3807	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2710	VRS-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA	R3808	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2711	VRS-CY1JF4R7JY	J 4.7	1/16W Metal Oxide	AA	R3810	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA
R2712	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R3811	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2713	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R3813	VRS-CJ1JF103JY	J 10k	1/16W Metal Oxide	AA
R2714	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3814	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R2715	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3815	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2716	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3819	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2717	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA	R3820	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2718	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3821	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2719	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3822	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2720	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA	R3823	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2721	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3824	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2722	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3825	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2724	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA	R3826	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2725	VRS-CY1JF271JY	J 270	1/16W Metal Oxide	AA	R3827	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2726	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R3832	VRS-CJ1JF470JY	J 47	1/16W Metal Oxide	AA
R2727	VRS-CJ1JF103JY	J 10k	1/16W Metal Oxide	AA	R3833	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2728	VRS-CY1JF4R7JY	J 4.7	1/16W Metal Oxide	AA	R3835	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2729	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA	R3838	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R2730	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3839	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
R2734	VRS-CY1JF183JY	J 18k	1/16W Metal Oxide	AA	R3843	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2735	VRS-CJ1JF103JY	J 10k	1/16W Metal Oxide	AA	R3847	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2738	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R3848	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2751	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R3849	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2752	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R3852	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2756	VRS-CY1JF273JY	J 27k	1/16W Metal Oxide	AA	R3853	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2757	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA	R3854	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
					R3855	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
					R3856	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

DUNTKC790WEV2

AV UNIT (Continued)

R3857	VRS-CY1JF331JY	J	330	1/16W Metal Oxide	AA
R3858	VRS-CY1JF820JY	J	82	1/16W Metal Oxide	AA
R3859	VRS-CY1JF331JY	J	330	1/16W Metal Oxide	AA
R3860	VRS-CY1JF820JY	J	82	1/16W Metal Oxide	AA
R3861	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3862	VRS-CY1JF820JY	J	82	1/16W Metal Oxide	AA
R3863	VRS-CY1JF331JY	J	330	1/16W Metal Oxide	AA
R3864	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3865	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3866	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3872	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3873	VRS-CY1JF101JY	J	100	1/16W Metal Oxide	AA
R3875	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3877	VRS-CY1JF101JY	J	100	1/16W Metal Oxide	AA
R3881	VRS-CY1JF220JY	J	22	1/16W Metal Oxide	AA
R3882	VRS-CY1JF220JY	J	22	1/16W Metal Oxide	AA
R3883	VRS-CY1JF220JY	J	22	1/16W Metal Oxide	AA
R3899	VRS-CY1JF473JY	J	47k	1/16W Metal Oxide	AA
R3900	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3901	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3919	VRS-CY1JF102JY	J	1k	1/16W Metal Oxide	AA
R3922	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R3924	VRS-CY1JF473JY	J	47k	1/16W Metal Oxide	AA
R3926	VRS-CY1JF102JY	J	1k	1/16W Metal Oxide	AA
R3932	VRS-CY1JF103JY	J	10k	1/16W Metal Oxide	AA
R3933	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R3934	VRS-CY1JF101JY	J	100	1/16W Metal Oxide	AA
R3935	VRS-CY1JF101JY	J	100	1/16W Metal Oxide	AA
R3938	VRS-CY1JF103JY	J	10k	1/16W Metal Oxide	AA
R3939	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R3941	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R3942	VRS-CY1JF104JY	J	100k	1/16W Metal Oxide	AA
R3943	VRS-CY1JF101JY	J	100	1/16W Metal Oxide	AA
R3956	VRS-CY1JF331JY	J	330	1/16W Metal Oxide	AA
R3957	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3958	VRS-TV1JD102JY	J	1k	1/10W Metal Oxide	AA
R3960	VRS-CY1JF331JY	J	330	1/16W Metal Oxide	AA
R3961	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R3962	VRS-TV1JD102JY	J	1k	1/10W Metal Oxide	AA
R3964	VRS-CY1JF331JY	J	330	1/16W Metal Oxide	AA
R3965	VRS-TV1JD102JY	J	1k	1/10W Metal Oxide	AA
R3966	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R5701	VRS-CY1JF103JY	J	10k	1/16W Metal Oxide	AA
R5702	VRS-CY1JF103JY	J	10k	1/16W Metal Oxide	AA
R5704	VRS-CY1JF102JY	J	1k	1/16W Metal Oxide	AA
R5705	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R5706	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R5720	VRS-TV1JD000JY	J	0	1/10W Metal Oxide	AA
R5721	VRS-TV1JD000JY	J	0	1/10W Metal Oxide	AA
R5722	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA
R5726	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R5727	VRS-CY1JF000JY	J	0	1/16W Metal Oxide	AA
R5774	VRS-CY1JF223JY	J	22k	1/16W Metal Oxide	AA

SWITCHES

S5701	QSW-K0096CEZZ	J	Reset	AB
S5702	QSW-K0096CEZZ	J	System Reset	AB

MISCELLANEOUS PARTS

RY2501	RRLYDA002WJZZY	J	Relay	AK
FB1900	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1901	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1902	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1903	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1904	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1905	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1906	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1907	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1908	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1909	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1910	RBLN-0060TAZZY	J	Ferrite Bead	AB

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

FB1911	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1912	RBLN-0062TAZZY	J	Ferrite Bead	AB
FB1913	RBLN-0062TAZZY	J	Ferrite Bead	AB
FB1914	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1915	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1916	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1917	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1918	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1919	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB1920	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB1921	RBLN-1043CEZZY	J	Ferrite Bead	AB
FB2501	RBLN-0059TAZZY	J	Ferrite Bead	AB
FB2502	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2503	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2504	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2505	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2506	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2507	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2508	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB2509	RBLN-0250TAZZY	J	Ferrite Bead	AC
FB2700	RBLN-0061TAZZY	J	Ferrite Bead	AD
FB2702	RBLN-0061TAZZY	J	Ferrite Bead	AD
FB2703	RBLN-0061TAZZY	J	Ferrite Bead	AD
FB2704	RBLN-0061TAZZY	J	Ferrite Bead	AD
FB3106	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB3108	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB3801	RBLN-0039TAZZY	J	Ferrite Bead	AB
FB3804	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3805	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3806	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3807	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3808	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3809	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3810	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3811	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3812	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3813	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3814	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3815	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3816	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3817	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3818	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3819	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3820	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3821	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3822	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3823	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3824	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3825	RBLN-0065TAZZY	J	Ferrite Bead	AA
FB3826	RBLN-0093GEZZY	J	Ferrite Bead	AB
FB3827	RBLN-0093GEZZY	J	Ferrite Bead	AB
FB3828	RBLN-0093GEZZY	J	Ferrite Bead	AB
FB3829	RBLN-0067TAZZY	J	Ferrite Bead	AC
FB3830	RBLN-0067TAZZY	J	Ferrite Bead	AC
J1101	QTANJA064WJZZ	J	AV Terminal	
J1105	QSOCD0834CEZZ	J	Socket, S-VIDEO	AH
J1106	QTANJA064WJZZ	J	AV Terminal	
J1107	QTANJA065WJZZ	J	Terminal	
J1900	QJAKJ0066CEZZ	J	INPUT5 Terminal (Audio)	AE
P2501	QPLGNA043WJZZ	J	Plug, 4-pin(SP)	AB
P3101	QPLGNA339WJZZY	J	Plug, 5-pin(DU)	AD
P3804	QPLGNA343WJZZY	J	Plug, 9-pin(RM)	AD
P3805	QPLGNA047WJZZ	J	Plug, 8-pin(RA)	AC
P3806	QPLGN0578GEZZ	J	Plug, 5-pin	AB
P5703	QPLGNA051WJZZ	J	Plug, 12-pin(PA)	AB
SC1900	QSOCZA061WJZZ	J	INPUT5 Terminal (DVI)	AK
SC1901	QSOCZA072WJZZQ	J	INPUT4 Terminal (DVI)	AH
SC3103	QSOCD0437FJZZ	J	PS-232C Terminal (DVI)	AM
SC5701	QSOCN0491FJZZY	J	Socket, 33-pin	AF
SC5702	QSOCN0464FJZZY	J	Socket, 50-pin	AH
LUG1103	QLUGHA006WJZZY	J	Lug	AC
LUG1104	QLUGHA006WJZZY	J	Lug	AC
LUG1105	QLUGHA006WJZZY	J	Lug	AC
LUG1106	QLUGHA006WJZZY	J	Lug	AC
PSLDMA501WJFW		J	HDMI Shield(Top), x1	
PSLDMA502WJFW		J	HDMI Shield(Bottom), x1	

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC791WEV2					DUNTKC792WEV0				
R/C, LED UNIT					KEY UNIT				
INTEGRATED CIRCUITS					TRANSISTORS				
IC101	VHITPS850+-1Y	J	TPS850	AG	Q151	VSDTC314TK/-1Y	J	DTC314TK	AC
TRANSISTORS					DIODES				
Q102	VS2SC3928AR-1Y	J	2SC3928AR	AB	D151	RH-EXA092WJZZY	J	Zener Diode, 12V	AB
Q103	VS2SC3928AR-1Y	J	2SC3928AR	AB	D152	RH-EXA092WJZZY	J	Zener Diode, 12V	AB
Q104	VS2SC3928AR-1Y	J	2SC3928AR	AB	D155	RH-EXA092WJZZY	J	Zener Diode, 12V	AB
Q105	VS2SC3928AR-1Y	J	2SC3928AR	AB	RESISTORS				
Q3004	VS2SC3928AR-1Y	J	2SC3928AR	AB	R151	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
DIODES					R152	VRS-CY1JF123JY	J	12k 1/16W Metal Oxide	AA
D101	RH-EXA092WJZZY	J	Zener Diode, 12V	AB	R153	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
D103	RH-PX0210TAZZY	J	POWER Indicator	AC	R154	VRS-CY1JF223JY	J	22k 1/16W Metal Oxide	AA
D3005	RH-PX0202TAZZY	J	OPC Indicator	AC	SWITCHES				
CAPACITORS					S151	QSW-K0095CEZZ	J	CH(∧)	AB
C101	VCEASY1CN107MY	J	100 16V Electrolytic	AC	S152	QSW-K0095CEZZ	J	CH(∨)	AB
C102	VCKYTV1CF225ZY	J	2.2 16V Ceramic	AB	S153	QSW-K0095CEZZ	J	INPUT	AB
C104	VCEASX1CN106MY	J	10 16V Electrolytic	AC	S154	QSW-K0095CEZZ	J	VOL(+)	AB
C105	VCKYCY1HF103ZY	J	0.01 50V Ceramic	AA	S155	QSW-K0095CEZZ	J	VOL(-)	AB
RESISTORS					S157	QSW-KA022WJZZ	J	POWER (On/Off)	AF
R101	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	MISCELLANEOUS PARTS				
R104	VRS-CY1JF273JY	J	27k 1/16W Metal Oxide	AA	P151	QPLGNA325WJZZY	J	Plug, 5-pin(KM)	AC
R105	VRS-CY1JF393JY	J	39k 1/16W Metal Oxide	AA					
R106	VRS-CY1JF683JY	J	68k 1/16W Metal Oxide	AA					
R108	VRS-CY1JF271JY	J	270 1/16W Metal Oxide	AA					
R109	VRS-CY1JF122JY	J	1.2k 1/16W Metal Oxide	AA					
R117	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA					
R3010	VRS-CY1JF271JY	J	270 1/16W Metal Oxide	AA					
R3011	VRS-CJ1JF103JY	J	10k 1/16W Metal Oxide	AA					
MISCELLANEOUS PARTS									
P101	QPLGNA047WJZZ	J	Plug, 8-pin(RA)	AC					
RMC101	RRMCU0239CEZZ	J	Remote Receiver	AG					
SLD101	PSLDM4646CEFW	J	Shield	AD					

Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U) DUNTKC793FE22 (LC-32GA5U) LCD CONTROL UNIT				
INTEGRATED CIRCUITS				
IC2001	VHIBD4742G+-1Y	J	BD4742G-TR	AD
IC2003	VHILTC1694C-1Y	J	LTC1694CS5#TR	AM
IC2004	RH-IXA870WJN7Q	J	HD64F3687H	
IC2006	VHIT7SET32U-1Y	J	TC7SET32FU	AD
IC2008	VHIBR24L08F-1Y	J	BR24L08F-WE2	AE
IC2010	VHIM62392FP-1Y	J	M62392FP	AM
IC2014	VHITC7W34U-1Y	J	TC7W34FU	AE
IC2015	VHISN2G66CT-1Y	J	SN74AHC2G66HDC	AE
IC2016	VHILVX125FT-1Y	J	TC74LVX125FT	AG
IC2017	VHILVX125FT-1Y	J	TC74LVX125FT	AG
IC2019	VHILVX125FT-1Y	J	TC74LVX125FT	AG
IC4101	RH-IXA706WJZZQ	J	IR3E12M1	AN
IC4102	VHINJM4580V-1Y	J	NJM4580V	AE
IC4107	VHILP2951CM-1Y	J	LP2951CMX	AL
IC4108	VHIPQ1CZ41H-1Y	J	PQ1CZ41H2ZP	AG
IC4109	VHILT1615ES-1Y	J	LT1615ES5	AP
IC4114	VHILT1617ES-1Y	J	LT1617ES5	AP
IC4116	VHILTC1872+-1Y	J	LTC1872ES6	AR
IC4501	RH-IXB003WJZZQ	J	LR38878	BB
IC4601	RH-IXB001WJZZQ	J	LR38879	BD
IC4602	RH-IXB272WJZZY	J	25LC640-I/SN	
IC4603	VHIT7WH123U-1Y	J	TC7WH123FU	AD
IC4901	RH-IXB002WJZZQ	J	KZ4E064311TFP	BB
IC4902	RH-IXA986WJZZQ	J	MS81V2600-12TB	BB
IC4903	RH-IXB242WJZZY	J	25LC320-I/SN (LC-32GA5U)	AL
IC4903	RH-IXB243WJZZY	J	25LC320-I/SN (LC-26GA5U)	AL
IC7702	VHIPQ20WZ11-1Y	J	PQ20WZ1U	AF
IC7703	VHIPQ1CZ21H-1Y	J	PQ1CZ21H2ZP	AH
IC7704	VHIPQ1CZ21H-1Y	J	PQ1CZ21H2ZP	AH
IC7705	VHIBD4742G+-1Y	J	BD4742G-TR	AD
IC7706	VHIPQ1CZ21H-1Y	J	PQ1CZ21H2ZP	AH
IC7708	VHIPQ1L503M-1Y	J	PQ1L503M2SP	AD
IC7709	VHIBD4742G+-1Y	J	BD4742G-TR	AD
IC7711	VHIPQ1CZ21H-1Y	J	PQ1CZ21H2ZP	AH
TRANSISTORS				
Q2002	VSDTC144EE/-1Y	J	DTC144EE	AA
Q2003	VSDTC144EE/-1Y	J	DTC144EE	AA
Q2004	VSDTC144EE/-1Y	J	DTC144EE	AA
Q2007	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q2011	VSDTC144EE/-1Y	J	DTC144EE	AA
Q2012	VSDTC144EE/-1Y	J	DTC144EE	AA
Q2013	VS2SK536///-1Y	J	2SK536	AE
Q2014	VS2SK536///-1Y	J	2SK536	AE
Q2015	VSDTC144EE/-1Y	J	DTC144EE	AA
Q4101	VS2SD1664Q+-1Y	J	2SD1664Q	AC
Q4103	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q4104	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q4105	VSTP0610T+-1Y	J	TP0610T	AD
Q4106	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q4108	VS2SK1826+-1Y	J	2SK1826	AC
Q4109	VS2SK1826+-1Y	J	2SK1826	AC
Q4110	VSSI4884DY+-1Y	J	SI4884DY-T1	AG
Q4112	VS2SB1132Q/-1Y	J	2SB1132Q	AC
Q7701	VSDTC114EE/-1Y	J	DTC114EE	AB
Q7702	VSDTA114EE/-1Y	J	DTA114EE	AB
Q7703	VSDTC114EE/-1Y	J	DTC114EE	AB
DIODES				
D2004	VHDMA157A/-1Y	J	Diode	AC
D2005	VHD1SS355/-1Y	J	Diode	AB
D2006	RH-EXA092WJZZY	J	Zener Diode, 12V	AB
D4101	VHDHSU119/-1Y	J	Diode	AB
D4102	VHDLi124+++1Y	J	Diode	AC
D4103	VHDHSU119/-1Y	J	Diode	AB
D4104	VHDHSU119/-1Y	J	Diode	AB
D4105	VHDLi114+++1Y	J	Diode	AC
D4106	RH-EX1274CEZZY	J	Zener Diode, 13V	AB
D4107	VHDHSU119/-1Y	J	Diode	AB
D4108	VHDLi114+++1Y	J	Diode	AC

Ref. No.	Part No.	★	Description	Code
D4109	VHDLi124+++1Y	J	Diode	AC
D4110	VHDDA221///-1Y	J	Diode	AB
D4501	VHDDAN222//1Y	J	Diode	AA
D7703	VHDHSU119//1Y	J	Diode	AB
D7704	VHDLi114+++1Y	J	Diode	AC
D7705	VHDLi114+++1Y	J	Diode	AC
D7707	VHDLi114+++1Y	J	Diode	AC
D7711	VHDDAN222//1Y	J	Diode	AA
D7712	VHDSC8024//1Y	J	Diode	AC
D7713	VHDSC8024//1Y	J	Diode	AC
D7714	VHDLi114+++1Y	J	Diode	AC
D7715	VHDDAN222//1Y	J	Diode	AA
D7716	RH-EX1264CEZZY	J	Zener Diode, 10V	AB
D7717	RH-EX1264CEZZY	J	Zener Diode, 10V	AB
D7718	VHD1SS355//1Y	J	Diode	AB
D7719	VHD1SS355//1Y	J	Diode	AB
D7720	VHD1SS355//1Y	J	Diode	AB
PACKAGED CIRCUITS				
X2001	RCRSC0032TAZZY	J	Crystal	AG
X4601	RCRUAA048WJZZY	J	Crystal, 83.565MHz	AK
FILTERS AND COILS				
FL2001	RFILZ0169TAZZY	J	Filter	AD
FL4103	RFILNA002WJZZY	J	Filter	AD
FL4651	RFILNA002WJZZY	J	Filter	AD
FL4652	RFILNA002WJZZY	J	Filter	AD
FL4653	RFILNA002WJZZY	J	Filter	AD
FL4654	RFILNA002WJZZY	J	Filter	AD
L4101	RCiLP0343TAZZY	J	Coil	AD
L4102	RCiLCA039WJZZY	J	Coil	AF
L4103	RCiLP0355TAZZY	J	Coil	AD
L4104	RCiLP0343TAZZY	J	Coil	AD
L4105	VPD9M4R7J1R4NY	J	Peaking 4.7μH	AB
L4106	RCiLPA001WJZZY	J	Coil	AF
L4107	VPBWM220K1R2NY	J	Peaking 22μH	AC
L4108	VPBWM220K1R2NY	J	Peaking 22μH	AC
L4109	RCiLP0343TAZZY	J	Coil	AD
L4110	VPD9M4R7J1R4NY	J	Peaking 4.7μH	AB
L7701	RCiLP0343TAZZY	J	Coil	AD
L7702	RCiLCA089WJZZY	J	Coil	
L7704	RCiLCA089WJZZY	J	Coil	
L7707	RCiLP0343TAZZY	J	Coil	AD
L7708	RCiLP0343TAZZY	J	Coil	AD
L7710	RCiLP0343TAZZY	J	Coil	AD
L7711	RCiLCA095WJZZY	J	Coil	
L7712	RCiLCA095WJZZY	J	Coil	
L7713	RCiLP0343TAZZY	J	Coil	AD
CAPACITORS				
C2001	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2002	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2003	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2004	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2006	VCCCCY1HH220JY	J	22p 50V Ceramic	AA
C2007	VCCCCY1HH220JY	J	22p 50V Ceramic	AA
C2008	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2009	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
C2010	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C2012	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
C2013	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
C2014	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2015	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2016	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2017	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2019	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2020	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C2021	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2022	VCEASY1CN107MY	J	100 16V Electrolytic	AC
C2023	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2024	VCCCCY1HH102JY	J	1000p 50V Ceramic	AB
C2025	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C2032	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2034	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C2035	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U)					C4521	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
DUNTKC793FE22 (LC-32GA5U)					C4523	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
LCD CONTROL UNIT (Continued)					C4524	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C2036	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4525	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C4101	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4526	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4102	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4527	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4103	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4528	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4106	RC-KZ0070TAZZY	J 4.7	16V Ceramic	AD	C4529	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C4108	RC-KZ0070TAZZY	J 4.7	16V Ceramic	AD	C4530	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C4109	VCCCCY1HH680JY	J 68p	50V Ceramic	AA	C4531	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4110	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4532	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4112	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4533	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4114	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4534	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4115	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4535	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4116	RC-KZA047WJZZY	J 1	50V Ceramic	AC	C4536	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4117	VCEASY1CN477MY	J 470	16V Electrolytic	AD	C4537	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4119	VCAAPF1DJ226MY	J 22	20V Electrolytic	AF	C4602	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4120	VCCCCY1HH5R0CY	J 5p	50V Ceramic	AA	C4603	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4121	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4604	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4124	VCCCCY1HH680JY	J 68p	50V Ceramic	AA	C4605	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4125	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4606	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4127	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4607	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4129	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4608	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4135	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C4609	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4136	VCAAPF1DJ226MY	J 22	20V Electrolytic	AF	C4610	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4137	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4611	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4138	VCEASY1EN227MY	J 220	25V Electrolytic	AD	C4612	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4139	VCKYTV1CB105KY	J 1	16V Ceramic	AC	C4613	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4141	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4614	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4142	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	C4615	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4145	RC-KZ0070TAZZY	J 4.7	16V Ceramic	AD	C4616	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4146	VCAAPF1CJ396MY	J 39	16V Electrolytic	AF	C4617	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4147	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4618	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4153	RC-KZA097WJZZY	J 1	16V Ceramic	AD	C4619	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4155	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4621	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4156	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4622	VCEASY0JN476MY	J 47	6.3V Electrolytic	AC
C4159	VCEASY1EN476MY	J 47	25V Electrolytic	AC	C4623	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4160	VCEASY1HN106MY	J 10	50V Electrolytic	AC	C4624	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4161	RC-KZ0070TAZZY	J 4.7	16V Ceramic	AD	C4625	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4162	VCCCCY1HH391JY	J 390p	50V Ceramic	AB	C4626	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4163	RC-KZA047WJZZY	J 1	50V Ceramic	AC	C4628	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4164	VCKYCY1CF224ZY	J 0.22	16V Ceramic	AB	C4629	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4165	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C4651	VCAAPF0JJ107MY	J 100	6.3V Electrolytic	AF
C4166	VCCCCY1HH221JY	J 220p	50V Ceramic	AA	C4652	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4168	RC-KZ0053TAZZY	J 10	10V Ceramic	AD	C4653	VCAAPF1DJ226MY	J 22	20V Electrolytic	AF
C4169	VCAAPF1DJ396MY	J 39	20V Electrolytic	AF	C4654	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4170	VCCCCY1HH101JY	J 100p	50V Ceramic	AA	C4655	VCAAPF0JJ107MY	J 100	6.3V Electrolytic	AF
C4174	RC-KZ0053TAZZY	J 10	10V Ceramic	AD	C4656	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4176	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4657	VCAAPF1DJ226MY	J 22	20V Electrolytic	AF
C4177	VCAAPF1DJ226MY	J 22	20V Electrolytic	AF	C4658	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4179	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4901	VCEASY0JN476MY	J 47	6.3V Electrolytic	AC
C4180	VCEASY1EN227MY	J 220	25V Electrolytic	AD	C4902	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4181	RC-KZ0070TAZZY	J 4.7	16V Ceramic	AD	C4903	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4192	VCKYCY1HB152KY	J 1500p	50V Ceramic	AA	C4904	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4195	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4905	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4196	VCEASX1VN226MY	J 22	35V Electrolytic	AC	C4906	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4197	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4907	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4502	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4908	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4503	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	C4909	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4505	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4910	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4506	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	C4911	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4508	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4912	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C4509	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	C4913	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4510	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4914	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4511	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4915	VCCCCY1HH331JY	J 330p	50V Ceramic	AA
C4512	VCCCCY1HH331JY	J 330p	50V Ceramic	AA	C4916	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4513	VCCCCY1HH331JY	J 330p	50V Ceramic	AA	C4917	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4514	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4919	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4515	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4920	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4516	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	C4921	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4517	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4922	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4518	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C4923	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4519	VCCCCY1HH331JY	J 330p	50V Ceramic	AA	C4924	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4520	VCCCCY1HH331JY	J 330p	50V Ceramic	AA	C4925	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
					C4926	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U) DUNTKC793FE22 (LC-32GA5U) LCD CONTROL UNIT (Continued)				
C4927	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4928	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4929	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4930	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4932	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4933	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4934	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4935	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4936	VCAAPF0JJ107MY	J 100	6.3V Electrolytic	AF
C4937	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4938	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C4939	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4940	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4941	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4942	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4943	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4944	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4945	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4946	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4947	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4948	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4949	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C4950	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4951	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4952	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4953	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4955	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C4956	RC-KZA073WJZZY	J 10	16V Ceramic	AD
C7701	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C7702	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7703	VCEASX1CN226MY	J 22	16V Electrolytic	AC
C7704	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7705	VCEASY1EN107MY	J 100	25V Electrolytic	AC
C7706	VCCCCY1HH681JY	J 680p	50V Ceramic	AB
C7707	VCEASY1EN227MY	J 220	25V Electrolytic	AD
C7708	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7709	VCEASY1EN227MY	J 220	25V Electrolytic	AD
C7710	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7712	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7713	VCCCCY1HH681JY	J 680p	50V Ceramic	AB
C7715	VCCCCY1HH681JY	J 680p	50V Ceramic	AB
C7720	VCEASY1CN337MY	J 330	16V Electrolytic	AD
C7721	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7722	VCEASY1EN477MY	J 470	25V Electrolytic	AE
C7723	VCEASY1CN477MY	J 470	16V Electrolytic	AD
C7724	VCEASY1CN477MY	J 470	16V Electrolytic	AD
C7725	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C7726	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7728	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7729	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7733	VCEASY1EN107MY	J 100	25V Electrolytic	AC
C7734	VCCCCY1HH681JY	J 680p	50V Ceramic	AB
C7735	VCEASY1CN477MY	J 470	16V Electrolytic	AD
C7736	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7737	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA

RESISTORS

R2003	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2004	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2005	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2006	VRS-CJ1JF333JY	J 33k	1/16W Metal Oxide	AA
R2007	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2008	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2009	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2010	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2011	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2012	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2013	VRS-CY1JF393JY	J 39k	1/16W Metal Oxide	AA
R2014	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
			(LC-32GA5U)	
R2016	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
			(LC-32GA5U)	

R2016	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
			(LC-26GA5U)	
R2017	VRS-CY1JF394JY	J 390k	1/16W Metal Oxide	AA
R2018	VRS-CY1JF106JY	J 10M	1/16W Metal Oxide	AA
R2019	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA
R2020	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2021	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2022	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2023	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2024	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2025	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2029	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2031	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2036	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2037	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
R2038	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2039	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA
R2040	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2041	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2042	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2043	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2044	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2045	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2046	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2047	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R2048	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2049	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2050	VRS-CY1JF683JY	J 68k	1/16W Metal Oxide	AA
R2051	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2052	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2053	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2054	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2055	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2056	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA
R2060	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2061	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2063	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2064	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2065	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA
R2066	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA
R2069	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2071	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2072	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2073	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2074	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R2075	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R2076	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2077	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2081	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2088	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2089	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2092	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2093	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R2095	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2098	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2099	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2600	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2601	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2602	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2603	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2604	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R2607	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2608	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2609	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2610	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2611	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2612	VRS-CY1JF822FY	J 8.2k	1/16W Metal Oxide	AA
R2613	VRS-CY1JF222FY	J 2.2k	1/16W Metal Oxide	AA
R2614	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2616	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2617	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2618	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2620	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2623	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R2625	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U) DUNTKC793FE22 (LC-32GA5U) LCD CONTROL UNIT (Continued)					R4141	VRS-CY1JF183FY	J	18k 1/16W Metal Oxide (LC-32GA5U)	AA
R2629	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	R4141	VRS-CY1JF273FY	J	27k 1/16W Metal Oxide (LC-26GA5U)	AA
R2630	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA	R4142	VRS-CY1JF101FY	J	100 1/16W Metal Oxide (LC-32GA5U)	AD
R2631	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA	R4142	VRS-CY1JF152FY	J	1.5k 1/16W Metal Oxide (LC-26GA5U)	AA
R2633	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	R4143	VRS-CY1JF333FY	J	33k 1/16W Metal Oxide (LC-32GA5U)	AA
R2634	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	R4143	VRS-CY1JF563FY	J	56k 1/16W Metal Oxide (LC-26GA5U)	AA
R2636	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA	R4144	VRS-CY1JF163FY	J	16k 1/16W Metal Oxide (LC-32GA5U)	AA
R2637	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA	R4144	VRS-CY1JF273FY	J	27k 1/16W Metal Oxide (LC-26GA5U)	AA
R2638	VRS-CY1JF223JY	J	22k 1/16W Metal Oxide	AA	R4145	VRS-CY1JF122FY	J	1.2k 1/16W Metal Oxide (LC-26GA5U)	AA
R2639	VRS-CY1JF100JY	J	10 1/16W Metal Oxide	AA	R4145	VRS-CY1JF431FY	J	430 1/16W Metal Oxide (LC-32GA5U)	AA
R2640	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA	R4146	VRS-CH1JF330JY	J	33 1/16W Metal Oxide	AA
R2641	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA	R4147	VRS-CH1JF100JY	J	10 1/16W Metal Oxide	AA
R2642	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	R4148	VRS-CY1JF433FY	J	43k 1/16W Metal Oxide (LC-26GA5U)	AA
R4101	VRS-CY1JF102FY	J	1k 1/16W Metal Oxide	AA	R4148	VRS-CY1JF473FY	J	47k 1/16W Metal Oxide (LC-32GA5U)	AA
R4102	VRS-CY1JF123FY	J	12k 1/16W Metal Oxide	AA	R4149	VRS-CY1JF243FY	J	24k 1/16W Metal Oxide (LC-26GA5U)	AA
R4103	VRS-CY1JF472FY	J	4.7k 1/16W Metal Oxide	AA	R4149	VRS-CY1JF273FY	J	27k 1/16W Metal Oxide (LC-32GA5U)	AA
R4109	VRS-CY1JF562FY	J	5.6k 1/16W Metal Oxide	AA	R4150	VRS-CY1JF391FY	J	390 1/16W Metal Oxide (LC-32GA5U)	AA
R4112	VRS-CY1JF153FY	J	15k 1/16W Metal Oxide	AA	R4150	VRS-CY1JF681FY	J	680 1/16W Metal Oxide (LC-26GA5U)	AA
R4113	VRS-CY1JF330JY	J	33 1/16W Metal Oxide	AA	R4152	VRS-CY1JF163FY	J	16k 1/16W Metal Oxide (LC-26GA5U)	AA
R4114	VRS-CY1JF563FY	J	56k 1/16W Metal Oxide (LC-26GA5U)	AA	R4152	VRS-CY1JF333FY	J	33k 1/16W Metal Oxide (LC-32GA5U)	AA
R4114	VRS-CY1JF623FY	J	62k 1/16W Metal Oxide (LC-32GA5U)	AA	R4153	VRS-CY1JF153FY	J	15k 1/16W Metal Oxide (LC-26GA5U)	AA
R4115	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	R4153	VRS-CY1JF333FY	J	33k 1/16W Metal Oxide (LC-32GA5U)	AA
R4118	VRS-CY1JF153FY	J	15k 1/16W Metal Oxide (LC-26GA5U)	AA	R4154	VRS-CY1JF122FY	J	1.2k 1/16W Metal Oxide (LC-26GA5U)	AA
R4118	VRS-CY1JF163FY	J	16k 1/16W Metal Oxide (LC-32GA5U)	AA	R4154	VRS-CY1JF431FY	J	430 1/16W Metal Oxide (LC-32GA5U)	AA
R4119	VRS-CY1JF362FY	J	3.6k 1/16W Metal Oxide (LC-26GA5U)	AA	R4155	VRS-CY1JF330FY	J	33 1/16W Metal Oxide	AA
R4119	VRS-CY1JF472FY	J	4.7k 1/16W Metal Oxide (LC-32GA5U)	AA	R4156	VRS-CY1JF100JY	J	10 1/16W Metal Oxide	AA
R4120	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA	R4157	VRS-CY1JF163FY	J	16k 1/16W Metal Oxide (LC-32GA5U)	AA
R4121	VRS-CY1JF332FY	J	3.3k 1/16W Metal Oxide	AA	R4157	VRS-CY1JF273FY	J	27k 1/16W Metal Oxide (LC-26GA5U)	AA
R4122	VRS-CY1JF682FY	J	6.8k 1/16W Metal Oxide	AA	R4158	VRS-CY1JF183FY	J	18k 1/16W Metal Oxide (LC-32GA5U)	AA
R4123	VRS-CY1JF332FY	J	3.3k 1/16W Metal Oxide	AA	R4158	VRS-CY1JF333FY	J	33k 1/16W Metal Oxide (LC-26GA5U)	AA
R4124	VRS-CY1JF392FY	J	3.9k 1/16W Metal Oxide (LC-32GA5U)	AA	R4159	VRS-CY1JF471FY	J	470 1/16W Metal Oxide (LC-26GA5U)	AA
R4124	VRS-CY1JF472FY	J	4.7k 1/16W Metal Oxide (LC-26GA5U)	AA	R4159	VRS-CY1JF681FY	J	680 1/16W Metal Oxide (LC-32GA5U)	AA
R4125	VRS-CY1JF332FY	J	3.3k 1/16W Metal Oxide	AA	R4160	VRS-CY1JF330FY	J	33 1/16W Metal Oxide	AA
R4126	VRS-CY1JF682FY	J	6.8k 1/16W Metal Oxide	AA	R4161	VRS-CY1JF100JY	J	10 1/16W Metal Oxide	AA
R4130	VRS-CH1JF100JY	J	10 1/16W Metal Oxide	AA	R4162	VRS-CY1JF243FY	J	24k 1/16W Metal Oxide (LC-26GA5U)	AA
R4132	VRS-CY1JF513FY	J	51k 1/16W Metal Oxide (LC-26GA5U)	AA	R4162	VRS-CY1JF273FY	J	27k 1/16W Metal Oxide (LC-32GA5U)	AA
R4132	VRS-CY1JF913FY	J	91k 1/16W Metal Oxide (LC-32GA5U)	AA	R4163	VRS-CY1JF513FY	J	51k 1/16W Metal Oxide (LC-26GA5U)	AA
R4133	VRS-CY1JF183FY	J	18k 1/16W Metal Oxide (LC-26GA5U)	AA	R4163	VRS-CY1JF563FY	J	56k 1/16W Metal Oxide (LC-32GA5U)	AA
R4133	VRS-CY1JF333FY	J	33k 1/16W Metal Oxide (LC-32GA5U)	AA	R4164	VRS-CY1JF390FY	J	39 1/16W Metal Oxide (LC-26GA5U)	AA
R4134	VRS-CY1JF221FY	J	220 1/16W Metal Oxide (LC-32GA5U)	AA	R4164	VRS-CY1JF621FY	J	620 1/16W Metal Oxide (LC-32GA5U)	AA
R4134	VRS-CY1JF681FY	J	680 1/16W Metal Oxide (LC-26GA5U)	AA	R4165	VRS-CH1JF330JY	J	33 1/16W Metal Oxide	AA
R4135	VRS-CY1JF103FY	J	10k 1/16W Metal Oxide	AA					
R4136	VRS-CY1JF393FY	J	39k 1/16W Metal Oxide (LC-32GA5U)	AA					
R4136	VRS-CY1JF563FY	J	56k 1/16W Metal Oxide (LC-26GA5U)	AA					
R4137	VRS-CY1JF163FY	J	16k 1/16W Metal Oxide (LC-32GA5U)	AA					
R4137	VRS-CY1JF223FY	J	22k 1/16W Metal Oxide (LC-26GA5U)	AA					
R4138	VRS-CY1JF122FY	J	1.2k 1/16W Metal Oxide (LC-26GA5U)	AA					
R4138	VRS-CY1JF160FY	J	16 1/16W Metal Oxide (LC-32GA5U)	AA					
R4139	VRS-CH1JF330JY	J	33 1/16W Metal Oxide	AA					
R4140	VRS-CY1JF393FY	J	39k 1/16W Metal Oxide (LC-32GA5U)	AA					
R4140	VRS-CY1JF623FY	J	62k 1/16W Metal Oxide (LC-26GA5U)	AA					

Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U) DUNTKC793FE22 (LC-32GA5U) LCD CONTROL UNIT (Continued)				
R4166	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA
R4167	VRS-CY1JF123FY	J 12k	1/16W Metal Oxide (LC-32GA5U)	AA
R4167	VRS-CY1JF243FY	J 24k	1/16W Metal Oxide (LC-26GA5U)	AA
R4168	VRS-CY1JF273FY	J 27k	1/16W Metal Oxide (LC-32GA5U)	AA
R4168	VRS-CY1JF563FY	J 56k	1/16W Metal Oxide (LC-26GA5U)	AA
R4169	VRS-CY1JF391FY	J 390	1/16W Metal Oxide (LC-32GA5U)	AA
R4169	VRS-CY1JF681FY	J 680	1/16W Metal Oxide (LC-26GA5U)	AA
R4170	VRS-CY1JF153FY	J 15k	1/16W Metal Oxide (LC-32GA5U)	AA
R4170	VRS-CY1JF223FY	J 22k	1/16W Metal Oxide (LC-26GA5U)	AA
R4171	VRS-CY1JF393FY	J 39k	1/16W Metal Oxide (LC-32GA5U)	AA
R4171	VRS-CY1JF563FY	J 56k	1/16W Metal Oxide (LC-26GA5U)	AA
R4172	VRS-CY1JF111FY	J 110	1/16W Metal Oxide (LC-32GA5U)	AA
R4172	VRS-CY1JF821FY	J 820	1/16W Metal Oxide (LC-26GA5U)	AA
R4174	VRS-CY1JF103FY	J 10k	1/16W Metal Oxide (LC-32GA5U)	AA
R4174	VRS-CY1JF223FY	J 22k	1/16W Metal Oxide (LC-26GA5U)	AA
R4175	VRS-CY1JF273FY	J 27k	1/16W Metal Oxide (LC-32GA5U)	AA
R4175	VRS-CY1JF623FY	J 62k	1/16W Metal Oxide (LC-26GA5U)	AA
R4176	VRS-CY1JF101FY	J 100	1/16W Metal Oxide (LC-26GA5U)	AD
R4176	VRS-CY1JF361FY	J 360	1/16W Metal Oxide (LC-32GA5U)	AA
R4177	VRS-CH1JF330JY	J 33	1/16W Metal Oxide	AA
R4178	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4179	VRS-CY1JF513FY	J 51k	1/16W Metal Oxide	AA
R4180	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide (LC-26GA5U)	AA
R4180	VRS-CY1JF392FY	J 3.9k	1/16W Metal Oxide (LC-32GA5U)	AA
R4181	VRS-CY1JF682FY	J 6.8k	1/16W Metal Oxide	AA
R4182	VRS-CY1JF103FY	J 10k	1/16W Metal Oxide	AA
R4183	VRS-CY1JF153FY	J 15k	1/16W Metal Oxide (LC-26GA5U)	AA
R4183	VRS-CY1JF183FY	J 18k	1/16W Metal Oxide (LC-32GA5U)	AA
R4184	VRS-CY1JF133FY	J 13k	1/16W Metal Oxide (LC-32GA5U)	AA
R4184	VRS-CY1JF223FY	J 22k	1/16W Metal Oxide (LC-26GA5U)	AA
R4186	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA
R4187	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4188	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R4190	VRS-CY1JF473FY	J 47k	1/16W Metal Oxide (LC-26GA5U)	AA
R4190	VRS-CY1JF563FY	J 56k	1/16W Metal Oxide (LC-32GA5U)	AA
R4191	VRS-CY1JF473FY	J 47k	1/16W Metal Oxide (LC-32GA5U)	AA
R4191	VRS-CY1JF823FY	J 82k	1/16W Metal Oxide (LC-26GA5U)	AA
R4192	VRS-CY1JF563FY	J 56k	1/16W Metal Oxide (LC-26GA5U)	AA
R4192	VRS-CY1JF623FY	J 62k	1/16W Metal Oxide (LC-32GA5U)	AA
R4193	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R4194	VRS-CY1JF121JY	J 120	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R4196	VRS-CY1JF750FY	J 75	1/16W Metal Oxide	AA
R4198	VRS-CY1JF562FY	J 5.6k	1/16W Metal Oxide	AA
R4199	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R4200	VRS-CY1JF121FY	J 120	1/16W Metal Oxide (LC-32GA5U)	AA
R4200	VRS-CY1JF821FY	J 820	1/16W Metal Oxide (LC-26GA5U)	AA
R4201	VRS-CY1JF621FY	J 620	1/16W Metal Oxide (LC-32GA5U)	AA
R4201	VRS-CY1JF821FY	J 820	1/16W Metal Oxide (LC-26GA5U)	AA
R4202	VRS-CY1JF151FY	J 150	1/16W Metal Oxide (LC-32GA5U)	AA
R4202	VRS-CY1JF821FY	J 820	1/16W Metal Oxide (LC-26GA5U)	AA
R4203	VRS-CY1JF121FY	J 120	1/16W Metal Oxide (LC-32GA5U)	AA
R4203	VRS-CY1JF271FY	J 270	1/16W Metal Oxide (LC-26GA5U)	AA
R4204	VRS-CY1JF682FY	J 6.8k	1/16W Metal Oxide	AA
R4205	VRS-CY1JF681FY	J 680	1/16W Metal Oxide (LC-26GA5U)	AA
R4205	VRS-CY1JF820FY	J 82	1/16W Metal Oxide (LC-32GA5U)	AA
R4206	VRS-TV1JD102JY	J 1k	1/10W Metal Oxide	AA
R4208	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA
R4209	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4210	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4211	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4213	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4216	VRS-CY1JF105FY	J 1M	1/16W Metal Oxide	AA
R4217	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4218	VRS-CY1JF393FY	J 39k	1/16W Metal Oxide	AA
R4219	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4220	VRS-CY1JF105FY	J 1M	1/16W Metal Oxide	AA
R4221	VRS-TW2ED153JY	J 15k	1/4W Metal Oxide	AA
R4222	VRS-TW2ED562JY	J 5.6k	1/4W Metal Oxide	AB
R4223	RR-NZ0027TAZZY	J 0.056	1/4W Metal Oxide	AC
R4224	VRS-TV1JD222JY	J 2.2k	1/10W Metal Oxide	AA
R4225	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4226	VRS-TV1JD222JY	J 2.2k	1/10W Metal Oxide	AA
R4227	VRS-TW2ED821JY	J 820	1/4W Metal Oxide	AB
R4228	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4229	VRS-CY1JF105FY	J 1M	1/16W Metal Oxide	AA
R4230	VRS-CY1JF202FY	J 2.0k	1/16W Metal Oxide	AA
R4231	VRS-CY1JF513FY	J 51k	1/16W Metal Oxide	AA
R4233	VRS-CY1JF393FY	J 39k	1/16W Metal Oxide	AA
R4234	VRS-CY1JF154FY	J 150k	1/16W Metal Oxide	AA
R4235	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R4238	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA
R4239	VRS-TW2ED682JY	J 6.8k	1/4W Metal Oxide	AA
R4244	VRS-TW2ED562JY	J 5.6k	1/4W Metal Oxide	AB
R4250	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4256	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R4260	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4261	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA
R4262	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4263	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R4264	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA
R4270	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R4271	VRS-CY1JF911FY	J 910	1/16W Metal Oxide	AA
R4272	VRS-CY1JF243FY	J 24k	1/16W Metal Oxide	AA
R4273	VRS-CY1JF513JY	J 51k	1/16W Metal Oxide	AA
R4275	VRS-CY1JF562FY	J 5.6k	1/16W Metal Oxide	AA
R4279	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4280	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4281	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4282	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA
R4286	VRS-CJ1JF100JY	J 10	1/16W Metal Oxide	AA
R4288	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA
R4501	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4502	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA
R4505	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4506	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4507	VRS-CJ1JF101JY	J 100	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U)									
DUNTKC793FE22 (LC-32GA5U)									
LCD CONTROL UNIT (Continued)									
R4508	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA	R4911	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4509	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R4912	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4510	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R4913	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R4511	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R4914	VRS-CJ1JF470JY	J 47	1/16W Metal Oxide	AA
R4512	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R4915	VRS-CJ1JF470JY	J 47	1/16W Metal Oxide	AA
R4513	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R4916	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4514	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4917	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4516	VRS-CY1JF133FY	J 13k	1/16W Metal Oxide	AA	R4918	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4518	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4919	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4519	VRS-CH1JF330JY	J 33	1/16W Metal Oxide	AA	R4920	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R4520	VRS-CJ1JF330JY	J 33	1/16W Metal Oxide	AA	R4922	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4521	VRS-CJ1JF330JY	J 33	1/16W Metal Oxide	AA	R4923	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4522	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R4924	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R4523	VRS-CH1JF330JY	J 33	1/16W Metal Oxide	AA	R7701	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA
R4524	VRS-CJ1JF330JY	J 33	1/16W Metal Oxide	AA	R7702	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA
R4525	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA	R7704	VRS-CY1JF202FY	J 2.0k	1/16W Metal Oxide	AA
R4526	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA	R7705	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R4527	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA	R7706	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R4528	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA	R7707	VRS-CY1JF682FY	J 6.8k	1/16W Metal Oxide	AA
R4529	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7708	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R4601	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7709	VRS-CY1JF432FY	J 4.3k	1/16W Metal Oxide	AA
R4602	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7710	VRS-CY1JF753FY	J 75k	1/16W Metal Oxide	AA
R4603	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7711	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R4604	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7712	VRS-CY1JF103FY	J 10k	1/16W Metal Oxide	AA
R4605	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7713	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R4606	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7714	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R4607	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7715	VRS-CY1JF222FY	J 2.2k	1/16W Metal Oxide	AA
R4608	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7716	VRS-CY1JF562FY	J 5.6k	1/16W Metal Oxide	AA
R4609	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7717	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4610	VRS-CY1JF101FY	J 100	1/16W Metal Oxide	AD	R7719	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4611	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7720	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4613	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7721	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R4614	VRS-CJ1JF100JY	J 10	1/16W Metal Oxide	AA	R7722	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4615	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA	R7725	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4616	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7729	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4617	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA	R7730	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4618	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7731	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4619	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7732	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4620	VRS-CY1JF270JY	J 27	1/16W Metal Oxide	AA	R7733	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R4621	VRS-CY1JF270JY	J 27	1/16W Metal Oxide	AA	R7734	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R4622	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7735	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R4623	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7736	VRS-CY1JF622FY	J 6.2k	1/16W Metal Oxide	AA
R4624	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7738	VRS-CJ1JF223JY	J 22k	1/16W Metal Oxide	AA
R4625	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7739	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4626	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7740	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA
R4627	VRS-CH1JF680JY	J 68	1/16W Metal Oxide	AA	R7741	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA
R4628	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA	R7744	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4629	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7745	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R4630	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7746	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4631	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7747	VRS-TW2ED330JY	J 33	1/4W Metal Oxide	AA
R4632	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7748	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4637	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R7749	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4639	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7750	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4640	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7751	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R4642	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7752	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R4651	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7753	VRS-CY1JF332FY	J 3.3k	1/16W Metal Oxide	AA
R4652	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7755	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4653	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7756	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4654	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7759	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R4655	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7760	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4656	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7761	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4901	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA	R7762	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4902	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA	R7763	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4903	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7764	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4904	VRS-CH1JF100JY	J 10	1/16W Metal Oxide	AA	R7765	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4905	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7766	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4906	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA	R7767	VRS-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R4907	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA	R7768	VRS-TW2ED1R0JY	J 1	1/4W Metal Oxide	AB
R4908	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA	R7769	VRS-TW2ED1R0JY	J 1	1/4W Metal Oxide	AB
R4909	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA	R7770	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4910	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA	R7771	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
					MISCELLANEOUS PARTS				
					FB2001	RBLN-0006TAZZY	J	Ferrite Bead	AB
					FB2003	RBLN-A005WJZZY	J	Ferrite Bead	AA

Ref. No.	Part No.	★	Description	Code
DUNTKC793FE21 (LC-26GA5U) DUNTKC793FE22 (LC-32GA5U) LCD CONTROL UNIT (Continued)				
FB2004	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2005	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2006	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2007	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2008	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2009	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2016	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2021	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2022	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB2023	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB4101	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4102	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4501	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4502	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4503	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4504	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4505	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4601	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4602	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB4603	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4604	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4605	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4901	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4902	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4903	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB4904	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB7705	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7706	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB7708	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB7709	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7710	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB7711	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB7712	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7713	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7716	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7717	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7718	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7719	RBLN-A005WJZZY	J	Ferrite Bead	AA
FB7720	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB7721	RBLN-0051TAZZY	J	Ferrite Bead	AC
FB7722	RBLN-0254TAZZY	J	Ferrite Bead	AB
FB7723	RBLN-0051TAZZY	J	Ferrite Bead	AC
FB7724	RBLN-0254TAZZY	J	Ferrite Bead	AB
P2001	QPLGN0544FJZZY	J	Plug, 7-pin(AD)	AD
P2002	QPLGNA339WJZZY	J	Plug, 5-pin(KM)	AD
P2003	QPLGNA173WJZZY	J	Plug, 4-pin(ST)	AD
P2004	QPLGNA343WJZZY	J	Plug, 9-pin(RM)	AD
P2006	QPLGNA348WJZZY	J	Plug, 14-pin(SH)	AE
P7704	QPLGNA177WJZZY	J	Plug, 8-pin(GV)	AE
P7705	QPLGNA168WJZZY	J	Plug, 12-pin(BL)	AF
P7706	QPLGN0540FJZZY	J	Plug, 3-pin(FA)	AD
P7707	QPLGNA176WJZZY	J	Plug, 7-pin(PO)	AE
P7708	QPLGN0175FJZZY	J	Plug, 3-pin(FB)	AC
SC4601	QSOCN0491FJZZY	J	Socket, 33-pin(LV)	AF
SC4651	QSOCNA222WJZZY	J	Socket, 80-pin	AH
SC4652	QSOCNA222WJZZY	J	Socket, 80-pin	AH
LUG7701	QLUGHA006WJZZY	J	Lug	AC
LUG7702	QLUGHA006WJZZY	J	Lug	AC
LUG7703	QLUGHA006WJZZY	J	Lug	AC
LUG7704	QLUGHA006WJZZY	J	Lug	AC
LUG7705	QLUGHA006WJZZY	J	Lug	AC
LUG7706	QLUGHA006WJZZY	J	Lug	AC
PSPAHA474WJZZ	J		Space, x1	

Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01 MAIN UNIT				
INTEGRATED CIRCUITS				
IC400	VHITC90A92A-1Q	J	TC90A92AFG	BC
IC402	VHISI3025LA-1Y	J	SI-3025LSA-TL	AF
IC403	VHiPQ1L153M-1Y	J	PQ1L153M2SP	AD
IC801	RH-iXB257WJZZY	J	EPCS1Si8N	
IC802	RH-iXA835WJZZQ	J	EP1C4F400C8N	BC
IC1001	RH-iXA869WJN1Q	J	XC95144XL-10TQ	AW
IC1500	VHiTLV1508P-1Y	J	TLV1508IPWR	AR
IC1501	VHiM62320FP-1Y	J	M62320FP	AH
IC1504	VHiTCVT244AFTY	J	TC74VHCT244AFT	AG
IC1505	VHiTCVT244AFTY	J	TC74VHCT244AFT	AG
IC1506	VHiLVX125FT-1Y	J	TC74LVX125FT	AG
IC1509	VHiM62320FP-1Y	J	M62320FP	AH
IC1512	VHiTC7W53U/-1Y	J	TC7W53FU	AF
IC1514	VHiPQ1R33/-1Y	J	PQ1R33	AE
IC1516	VHiAHCT08PW-1Y	J	SN74AHCT08PW	AD
IC1801	VHiPQ20WZ11-1Y	J	PQ20WZ1U	AF
IC1802	VHiPQ20WZ11-1Y	J	PQ20WZ1U	AF
IC1803	VHiPQ070XH2-1Y	J	PQ070XH02ZP	AG
IC1804	VHiPQ20WZ11-1Y	J	PQ20WZ1U	AF
IC1805	VHiMD4729G+-1Y	J	BD4729G-TR	AD
IC1806	VHiPQ015EZ1-1Y	J	PQ015EZ01ZP	AG
IC2101	RH-iXA873WJZZY	J	PCA9564PW_118	AS
IC2102	VHiBR24L64F-1Y	J	BR24L64F-WE2	AK
IC3201	VHiTLVD823+-1Q	J	THC63LVD823	AY
IC3202	VHiPQ1R33/-1Y	J	PQ1R33	AE
IC3300	RH-iXA091WJZZQ	J	MB87M1370TB-G	BX
IC3400	RH-iXB029WJZZQ	J	MT48LC2M32B2P6	AX
IC3401	RH-iXB029WJZZQ	J	MT48LC2M32B2P6	AX
IC3402	RH-iXB029WJZZQ	J	MT48LC2M32B2P6	AX
IC3403	RH-iXB029WJZZQ	J	MT48LC2M32B2P6	AX
IC3700	VHiAD988810-1Q	J	AD9888KSZ-100	BA
IC3701	VHiTVHC153T-1Y	J	TC74VHC153FT	AE
IC3702	VHiPQ033EZ1-1Y	J	PQ033EZ01ZP	AF
IC3703	VHiSM5301AS-1Y	J	SM5301AS-G-ET	AR
IC3704	VHiTA1318AF1EY	J	TA1318AF	AS
IC3708	RH-iWH126FU-1Y	J	TC7WH126FU	AE
IC3709	VHiT7WH123U-1Y	J	TC7WH123FU	AD
IC3710	VHiSN2G53CT-1Y	J	SN74AHC2G53HDC	AE
TRANSISTORS				
Q410	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q411	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q412	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q414	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q415	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q416	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q417	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q418	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1502	VS2TA124EKA-1Y	J	DTA124EKA	AB
Q1503	VS2TC124EKA-1Y	J	DTC124EKA	AB
Q1507	VS2TC144EE/-1Y	J	DTC144EE	AA
Q1508	VS2SB1132Q/-1Y	J	DSB1132Q	AC
Q1510	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1512	VS2TC144EE/-1Y	J	DTC144EE	AA
Q1515	VS2TC144EE/-1Y	J	DTC144EE	AA
Q1516	VS2TC144EE/-1Y	J	DTC144EE	AA
Q1517	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1518	VS2SC3928AR-1Y	J	2SC3928AR	AB
Q1519	VS2TA124EKA-1Y	J	DTA124EKA	AB
Q1520	VS2TC124EKA-1Y	J	DTC124EKA	AB
Q1801	VS2SA1530AR-1Y	J	2SA1530AR	AB
Q1802	VS2TC124EKA-1Y	J	DTC124EKA	AB
Q3700	VS2SK536///-1Y	J	2SK536	AE
Q3701	VS2SK536///-1Y	J	2SK536	AE
Q7207	VS2TC144EE/-1Y	J	DTC144EE	AA
DIODES				
D801	RH-PXA018WJZZY	J	GM1HD55200A	AC
D1500	VHDDAN222/-1Y	J	Diode	AA
D1502	VHDDAN222/-1Y	J	Diode	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01									
MAIN UNIT (Continued)									
D1504	VHDDAN222/-1Y	J	Diode	AA	C430	VCEASX0JN476MY	J	47 6.3V Electrolytic	AC
D3201	VHD1SS355/-1Y	J	Diode	AB	C431	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
D3700	VHDB521S30-1Y	J	Diode	AC	C432	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
D3701	VHDB521S30-1Y	J	Diode	AC	C433	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
D3702	VHD1SS355/-1Y	J	Diode	AB	C434	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
PACKAGED CIRCUITS					C435	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
X400	RCRSCA067WJZZY	J	Crystal, 42MHz	AG	C436	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
X801	RCRSZA028WJZZY	J	Crystal, 33MHz	AL	C437	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
X3300	RCRSZA025WJZZY	J	Crystal, 83.57MHz	AM	C438	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
X3301	RCRSZA024WJZZY	J	Crystal, 25.175MHz	AK	C439	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
X3302	RCRSZA023WJZZY	J	Crystal, 25MHz	AK	C440	VCEASX0JN226MY	J	22 6.3V Electrolytic	AB
X3700	RFILA0034CEZZ	J	Filter	AD	C441	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
FILTERS AND COILS					C442	VCCCCY1HH4R0CY	J	4p 50V Ceramic	AA
FL3200	RCiLFA071WJZZY	J	Coil	AD	C443	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
FL3201	RCiLFA071WJZZY	J	Coil	AD	C446	VCCCCY1EH102JY	J	1000p 25V Ceramic	AB
FL3202	RCiLFA071WJZZY	J	Coil	AD	C448	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
FL3203	RCiLFA071WJZZY	J	Coil	AD	C449	VCEASX1CN106MY	J	10 16V Electrolytic	AC
FL3204	RCiLFA071WJZZY	J	Coil	AD	C450	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
FL3205	RCiLFA071WJZZY	J	Coil	AD	C463	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
FL3206	RCiLFA071WJZZY	J	Coil	AD	C464	VCEASX0JN226MY	J	22 6.3V Electrolytic	AB
FL3207	RCiLFA071WJZZY	J	Coil	AD	C465	VCEASX0JN476MY	J	47 6.3V Electrolytic	AC
FL3208	RCiLFA071WJZZY	J	Coil	AD	C466	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
FL3209	RCiLFA071WJZZY	J	Coil	AD	C467	VCEASX0JN226MY	J	22 6.3V Electrolytic	AB
FL3300	RFILNA036WJZZY	J	Filter	AC	C468	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
FL3305	RFILNA036WJZZY	J	Filter	AC	C469	VCEASX0JN226MY	J	22 6.3V Electrolytic	AB
FL3306	RBLN-0061TAZZY	J	Ferrite Bead	AD	C473	RC-KZA176WJZZY	J	10 10V Ceramic	AC
FL3307	RBLN-0061TAZZY	J	Ferrite Bead	AD	C476	VCCCCY1HH680JY	J	68p 50V Ceramic	AA
FL3400	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	C477	VCCCCY1HH120JY	J	12p 50V Ceramic	AA
FL3401	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	C478	VCCCCY1HH270JY	J	27p 50V Ceramic	AA
FL3402	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	C479	VCCCCY1HH3R0CY	J	3p 50V Ceramic	AA
FL3403	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	C480	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
L400	VPD9M470J6R6NY	J	Peaking 47μH	AC	C481	VCCCCY1HH120JY	J	12p 50V Ceramic	AA
L401	VPD9M1R5JR77NY	J	Peaking 1.5μH	AB	C482	VCCCCY1HH270JY	J	27p 50V Ceramic	AA
L402	VPD9M220J2R7NY	J	Peaking 22μH	AC	C483	VCCCCY1HH3R0CY	J	3p 50V Ceramic	AA
L403	VPD9M220J2R7NY	J	Peaking 22μH	AC	C801	RC-KZA101WJZZY	J	10 6.3V Ceramic	AC
L801	VPCEM220M1R7NY	J	Peaking 22μH	AC	C802	RC-KZA101WJZZY	J	10 6.3V Ceramic	AC
L1500	VPD9M470J6R6NY	J	Peaking 47μH	AC	C803	RC-KZA101WJZZY	J	10 6.3V Ceramic	AC
L3701	VPCUN100KR42NY	J	Peaking 10μH	AB	C804	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
CAPACITORS					C805	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C400	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA	C806	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C401	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C807	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C402	VCEASX1CN106MY	J	10 16V Electrolytic	AC	C808	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C403	VCKYCY1HB152KY	J	1500p 50V Ceramic	AA	C809	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C404	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C810	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C405	VCEASX1CN106MY	J	10 16V Electrolytic	AC	C811	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C406	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C812	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C407	VCCCCY1HH5R0CY	J	5p 50V Ceramic	AA	C813	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C408	VCCCCY1HH180JY	J	18p 50V Ceramic	AA	C814	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C409	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C815	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C410	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C816	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C411	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C817	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C412	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C818	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C413	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C819	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C414	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C820	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C415	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA	C821	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C416	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C822	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C417	VCEASX0JN476MY	J	47 6.3V Electrolytic	AC	C823	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C418	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C824	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C419	VCEASX1CN106MY	J	10 16V Electrolytic	AC	C825	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C420	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C826	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C421	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C827	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C422	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C828	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C423	VCCCCY1HH151JY	J	150p 50V Ceramic	AA	C829	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C424	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA	C830	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C425	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA	C831	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C426	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA	C832	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C428	VCKYTV1CB474KY	J	0.47 16V Ceramic	AC	C833	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C429	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	C834	RC-KZA043WJZZY	J	10 6.3V Ceramic	AC
					C1002	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
					C1004	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
					C1005	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
					C1006	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
					C1007	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
					C1008	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
					C1009	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01				
MAIN UNIT (Continued)				
C1011	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1012	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1500	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1501	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C1502	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C1503	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1506	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1510	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1511	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1512	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1513	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1514	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1515	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1516	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1517	VCEASX1CN106MY	J 10	16V Electrolytic	AC
C1518	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1522	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1801	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1802	VCEASX1VN226MY	J 22	35V Electrolytic	AC
C1803	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1804	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1805	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1806	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1807	VCEASX1VN226MY	J 22	35V Electrolytic	AC
C1808	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1809	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1810	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1811	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1812	VCEASX1VN226MY	J 22	35V Electrolytic	AC
C1813	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1814	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1815	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1816	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1817	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1818	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1819	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1820	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1823	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1824	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1825	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C1826	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1827	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1828	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C1829	VCEASY1CN107MY	J 100	16V Electrolytic	AC
C1830	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2101	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2106	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C2107	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3201	VCEASX1AN336MY	J 33	10V Electrolytic	AC
C3202	VCEASX1AN336MY	J 33	10V Electrolytic	AC
C3203	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3204	VCEASX1AN336MY	J 33	10V Electrolytic	AC
C3205	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3206	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3207	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3208	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3209	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3210	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3211	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3212	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3213	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3214	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3215	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3216	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3217	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3301	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3303	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3305	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3306	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3307	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3308	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
C3309	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3310	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3311	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3312	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3314	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3316	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3318	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3320	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3321	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3322	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3323	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3324	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3325	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3326	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3327	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3328	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3329	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3330	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3331	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3332	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3333	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3334	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3335	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3336	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C3339	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C3340	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3342	VCKYTV1CB105KY	J 1	16V Ceramic	AC
C3343	VCCCY1HH5R0CY	J 5p	50V Ceramic	AA
C3400	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C3401	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3402	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3403	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3404	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3405	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3406	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3407	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C3408	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3409	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3410	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3412	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3413	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3414	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3415	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C3416	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3417	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3418	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3419	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3420	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3421	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3422	VCEASX0JN476MY	J 47	6.3V Electrolytic	AC
C3423	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3424	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3425	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3426	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3427	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3428	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C3701	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3702	VCKYCY1HB392KY	J 3900p	50V Ceramic	AA
C3704	VCKYCY1EB393KY	J 0.039	25V Ceramic	AA
C3707	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3708	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3709	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3710	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3711	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3712	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3713	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3714	VCEASX0JN226MY	J 22	6.3V Electrolytic	AB
C3715	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3716	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3717	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3718	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3719	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3720	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3721	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3722	VCKYCY1EB473KY	J 0.047	25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01									
MAIN UNIT (Continued)									
C3723	VCKYCY1EB473KY	J	0.047 25V Ceramic	AA	R471	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
C3724	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R473	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
C3725	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R474	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
C3726	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R475	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
C3727	VCKYCY1EB473KY	J	0.047 25V Ceramic	AA	R476	VRS-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA
C3728	VCKYCY1EB473KY	J	0.047 25V Ceramic	AA	R477	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
C3729	VCKYCY1EB473KY	J	0.047 25V Ceramic	AA	R478	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3730	VCKYCY1EB473KY	J	0.047 25V Ceramic	AA	R479	VRS-CY1JF911JY	J 910	1/16W Metal Oxide	AB
C3731	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R480	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3732	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R481	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C3733	VCEASX0JN226MY	J	22 6.3V Electrolytic	AB	R484	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C3735	VCEASX0JN476MY	J	47 6.3V Electrolytic	AC	R485	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
C3736	VCKYCY1CB104KY	J	0.1 25V Ceramic	AA	R487	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3737	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB	R488	VRS-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA
C3738	VCEASX1CN476MY	J	47 16V Electrolytic	AC	R489	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
C3739	VCCCCY1HH470JY	J	47p 50V Ceramic	AA	R490	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3740	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB	R491	VRS-CY1JF911JY	J 910	1/16W Metal Oxide	AB
C3741	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R492	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3743	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R493	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
C3744	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R495	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3745	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R496	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
C3746	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R498	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3747	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R801	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
C3748	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA	R802	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
C3749	VCEASX0JN226MY	J	22 6.3V Electrolytic	AB	R803	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
C3750	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R804	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
C3751	VCEASX0JN476MY	J	47 6.3V Electrolytic	AC	R810	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
C3753	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB	R812	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
C3754	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R813	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
C3755	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R814	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C3756	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R815	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C3757	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R816	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C3758	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R817	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA
C3759	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R818	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C3760	VCEASY1CN107MY	J	100 16V Electrolytic	AC	R819	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
C3761	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB	R820	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3762	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R821	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3763	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R822	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3764	VCAAPC1AJ106MY	J	10 10V Electrolytic	AE	R823	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3765	VCCCCY1EH102JY	J	1000p 25V Ceramic	AB	R824	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3766	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R825	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3767	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R826	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3768	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R827	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3769	VCCCCY1EH102JY	J	1000p 25V Ceramic	AB	R828	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC
C3770	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R832	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C3771	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R833	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C3772	VCKYTV1CB105KY	J	1 16V Ceramic	AC	R834	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C7227	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA	R835	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
RESISTORS					R836	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R400	VRS-CY1JF274JY	J	270k 1/16W Metal Oxide	AA	R837	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R401	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	R838	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R405	VRS-TV1JD000JY	J	0 1/10W Metal Oxide	AA	R839	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R407	VRS-CY1JF330JY	J	33 1/16W Metal Oxide	AA	R840	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R408	VRS-CY1JF330JY	J	33 1/16W Metal Oxide	AA	R841	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R409	VRS-CY1JF330JY	J	33 1/16W Metal Oxide	AA	R1001	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R410	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA	R1002	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R411	VRS-CJ1JF680JY	J	68 1/16W Metal Oxide	AA	R1003	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R412	VRS-CH1JF680JY	J	68 1/16W Metal Oxide	AA	R1004	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R413	VRS-CH1JF680JY	J	68 1/16W Metal Oxide	AA	R1005	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R416	VRS-TV1JD000JY	J	0 1/10W Metal Oxide	AA	R1006	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R417	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	R1007	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R418	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA	R1008	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R419	VRS-CY1JF561JY	J	560 1/16W Metal Oxide	AA	R1009	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R420	VRS-CY1JF183JY	J	18k 1/16W Metal Oxide	AA	R1010	VRS-CH1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R421	VRS-CY1JF152JY	J	1.5k 1/16W Metal Oxide	AA	R1011	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
R422	VRS-CY1JF122JY	J	1.2k 1/16W Metal Oxide	AA	R1012	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R448	VRS-TW2ED2R2JY	J	2.2 1/4W Metal Oxide	AA	R1013	VRS-CH1JF000JY	J 0	1/16W Metal Oxide	AA
R449	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA	R1014	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R450	VRS-CY1JF100JY	J	10 1/16W Metal Oxide	AA	R1015	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
R451	VRS-CY1JF100JY	J	10 1/16W Metal Oxide	AA	R1016	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
					R1018	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R1019	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R1020	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R1021	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R1023	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01				
MAIN UNIT (Continued)				
R1025	VRS-CJ1JF000JY	J 0	1/16W Metal Oxide	AA
R1026	VRS-CH1JF470JY	J 47	1/16W Metal Oxide	AA
R1028	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1029	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1030	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1031	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1032	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1033	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1034	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1049	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1073	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
R1075	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1077	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1078	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1079	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1082	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1500	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1501	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1502	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1506	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1507	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1508	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R1509	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1512	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1514	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1515	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1516	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1517	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1518	VRS-CY1JF391JY	J 390	1/16W Metal Oxide	AA
R1519	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1520	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1521	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1522	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1523	VRS-CY1JF391JY	J 390	1/16W Metal Oxide	AA
R1533	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA
R1534	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA
R1535	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA
R1536	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1537	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1538	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1539	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1540	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1541	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1542	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1543	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1544	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R1545	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R1546	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R1547	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1548	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
R1551	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1552	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R1553	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R1554	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R1559	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1560	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R1561	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1562	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R1563	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1565	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1567	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1573	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1574	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1575	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1576	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1578	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1579	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1580	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1581	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1582	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1587	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R1589	VRS-CY1JF273JY	J 27k	1/16W Metal Oxide	AA
R1590	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1592	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1594	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1595	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1596	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1597	VRS-CY1JF153JY	J 15k	1/16W Metal Oxide	AA
R1598	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R1603	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1604	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R1605	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1606	VRS-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA
R1607	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R1611	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1612	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1613	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1614	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1615	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1616	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1617	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1618	VRS-CY1JF474JY	J 470k	1/16W Metal Oxide	AA
R1619	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R1620	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1623	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R1624	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R1625	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1626	VRS-CJ1JF103JY	J 10k	1/16W Metal Oxide	AA
R1628	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R1630	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R1801	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1802	VRS-CY1JF122FY	J 1.2k	1/16W Metal Oxide	AA
R1803	VRS-CY1JF820FY	J 82	1/16W Metal Oxide	AA
R1804	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R1805	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1806	VRS-CY1JF202FY	J 2.0k	1/16W Metal Oxide	AA
R1807	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1808	VRS-CY1JF511FY	J 510	1/16W Metal Oxide	AA
R1809	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1810	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R1811	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1812	VRS-CY1JF302FY	J 3.0k	1/16W Metal Oxide	AA
R1813	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1814	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R1815	VRS-CY1JF221FY	J 220	1/16W Metal Oxide	AA
R1816	VRS-CY1JF222FY	J 2.2k	1/16W Metal Oxide	AA
R1817	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1818	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1819	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R1820	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R1821	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R1822	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R1827	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2107	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R2112	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R2115	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
R2116	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2117	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2118	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R2119	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R2120	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2121	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2123	VRS-CJ1JF000JY	J 0	1/16W Metal Oxide	AA
R2127	VRS-CJ1JF000JY	J 0	1/16W Metal Oxide	AA
R2129	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2130	VRK-CD1JJ100JY	J 10	1/16W Metal Compo.	AC
R2132	VRK-CD1JJ100JY	J 10	1/16W Metal Compo.	AC
R2134	VRK-CD1JJ100JY	J 10	1/16W Metal Compo.	AC
R2136	VRK-CD1JJ100JY	J 10	1/16W Metal Compo.	AC
R2139	VRK-CD1JJ100JY	J 10	1/16W Metal Compo.	AC
R2141	VRK-CD1JJ100JY	J 10	1/16W Metal Compo.	AC
R2143	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2145	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2146	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2147	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2148	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01									
MAIN UNIT (Continued)									
R2149	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3727	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R2150	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3728	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R2153	VRS-CJ1JF000JY	J 0	1/16W Metal Oxide	AA	R3729	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R2179	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3730	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2180	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3731	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2181	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3732	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R2182	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3733	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R2183	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3734	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2184	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3735	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R3201	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC	R3736	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R3203	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC	R3737	VRS-CY1JF391JY	J 390	1/16W Metal Oxide	AA
R3205	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC	R3738	VRS-CY1JF512JY	J 5.1k	1/16W Metal Oxide	AA
R3207	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC	R3739	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R3209	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC	R3740	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R3211	VRK-CD1JJ330JY	J 33	1/16W Metal Compo.	AC	R3741	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R3213	RR-TZ0073CEZZY	J	Resistor	AA	R3742	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R3214	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R3743	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R3215	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R3744	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R3217	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R3745	VRS-CY1JF123JY	J 12k	1/16W Metal Oxide	AA
R3218	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R3746	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3220	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R3747	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3300	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3748	VRS-CY1JF821JY	J 820	1/16W Metal Oxide	AA
R3303	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA	R3749	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R3304	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA	R3751	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R3305	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3752	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R3306	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3753	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R3307	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3754	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R3308	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R3755	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3310	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3756	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3312	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3757	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3313	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3758	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3314	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R3759	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R3315	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3760	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3316	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3761	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3317	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3763	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3320	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3765	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3321	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3766	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R3323	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3767	VRS-TV1JD750JY	J 75	1/10W Metal Oxide	AA
R3324	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3768	VRS-TV1JD750JY	J 75	1/10W Metal Oxide	AA
R3326	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R3769	VRS-TV1JD750JY	J 75	1/10W Metal Oxide	AA
R3327	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R3770	VRS-CY1JF224JY	J 220k	1/16W Metal Oxide	AA
R3328	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R3771	VRS-CY1JF334JY	J 330k	1/16W Metal Oxide	AA
R3329	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R3772	VRS-CY1JF224JY	J 220k	1/16W Metal Oxide	AA
R3330	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R3773	VRS-CY1JF334JY	J 330k	1/16W Metal Oxide	AA
R3331	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R3774	VRS-TV1JD000JY	J 0	1/10W Metal Oxide	AA
R3332	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R3775	VRS-CY1JF224JY	J 220k	1/16W Metal Oxide	AA
R3400	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3776	VRS-CY1JF334JY	J 330k	1/16W Metal Oxide	AA
R3401	VRS-CY1JF471JY	J 470	1/16W Metal Oxide	AA	R3777	VRS-CY1JF224JY	J 220k	1/16W Metal Oxide	AA
R3402	VRS-CY1JF181JY	J 180	1/16W Metal Oxide	AA	R3778	VRS-CY1JF334JY	J 330k	1/16W Metal Oxide	AA
R3403	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3779	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R3404	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3780	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R3405	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R3781	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R3701	VRK-CD1JJ680JY	J 68	1/16W Metal Compo.	AC	R3782	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3703	VRK-CD1JJ680JY	J 68	1/16W Metal Compo.	AC	R3785	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3705	VRK-CD1JJ680JY	J 68	1/16W Metal Compo.	AC	R3786	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA
R3707	VRK-CD1JJ680JY	J 68	1/16W Metal Compo.	AC	R3788	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA
R3709	VRK-CD1JJ680JY	J 68	1/16W Metal Compo.	AC	R7241	VRS-CY1JF183JY	J 18k	1/16W Metal Oxide	AA
R3710	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7242	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3711	VRK-CD1JJ680JY	J 68	1/16W Metal Compo.	AC	R7243	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3714	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R7244	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R3715	VRS-CY1JF680JY	J 68	1/16W Metal Oxide	AA	R7246	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R3716	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7249	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3718	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7256	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R3719	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7262	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R3720	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7266	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R3721	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7267	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R3722	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7290	VRS-CY1JF273JY	J 27k	1/16W Metal Oxide	AA
R3723	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7291	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R3724	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R7292	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3725	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7293	VRS-CY1JF183JY	J 18k	1/16W Metal Oxide	AA
R3726	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	MISCELLANEOUS PARTS				
					FB400	RBLN-0051TAZZY	J	Ferrite Bead	AC
					FB401	RBLN-0210TAZZY	J	Ferrite Bead	AB
					FB404	RBLN-0062TAZZY	J	Ferrite Bead	AB

Ref. No.	Part No.	★	Description	Code
DUNTKC794FE01				
MAIN UNIT (Continued)				
FB405	RBLN-0062TAZZY	J	Ferrite Bead	AB
FB406	RBLN-0051TAZZY	J	Ferrite Bead	AC
FB407	RBLN-0051TAZZY	J	Ferrite Bead	AC
FB408	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB410	RBLN-0062TAZZY	J	Ferrite Bead	AB
FB801	RBLN-0254TAZZY	J	Ferrite Bead	AB
FB3202	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB3204	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB3206	RBLN-0060TAZZY	J	Ferrite Bead	AB
FB3300	RBLN-0061TAZZY	J	Ferrite Bead	AD
FB3700	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB3701	RBLN-0210TAZZY	J	Ferrite Bead	AB
FB3703	RBLN-0210TAZZY	J	Ferrite Bead	AB
P801	QPLGN0060CEZZY	J	Plug, 10-pin	AE
P1001	QPLGN0056CEZZY	J	Plug, 6-pin	AD
P1501	QPLGNA348WJZZY	J	Plug, 14-pin(SH)	AE
P1802	QPLGNA179WJZZY	J	Plug, 10-pin(PB)	
P1803	QPLGNA179WJZZY	J	Plug, 10-pin(PE)	
P1804	QPLGNA175WJZZY	J	Plug, 6-pin(PD)	AD
P3301	QEARBA005WJFMY	J	Grounding Part	AD
P3302	QEARBA005WJFMY	J	Grounding Part	AD
P3303	QEARBA005WJFMY	J	Grounding Part	AD
P7202	QEARBA005WJFMY	J	Grounding Part	AD
P7203	QEARBA005WJFMY	J	Grounding Part	AD
P7207	QEARBA005WJFMY	J	Grounding Part	AD
P7208	QEARBA005WJFMY	J	Grounding Part	AD
P7210	QEARBA005WJFMY	J	Grounding Part	AD
P7211	QEARBA005WJFMY	J	Grounding Part	AD
P7215	QEARBA005WJFMY	J	Grounding Part	AD
P7221	QEARBA005WJFMY	J	Grounding Part	AD
SC2101	QCNCWA255WJZZY	J	Connector, 80-pin	
SC3200	QSOCN0491FJZZY	J	Socket, 33-pin(LV)	AF
SC3201	QSOCN0491FJZZY	J	Socket, 33-pin	AF
SC3202	QSOCN0464FJZZY	J	Socket, 50-pin	AH
LUG7201	QLUGHA006WJZZY	J	Lug	AC
LUG7208	QLUGHA006WJZZY	J	Lug	AC
LUG7209	QLUGHA006WJZZY	J	Lug	AC
LUG7210	QLUGHA006WJZZY	J	Lug	AC
LUG7211	QLUGHA006WJZZY	J	Lug	AC
LUG7212	QLUGHA006WJZZY	J	Lug	AC
LUG7213	QLUGHA006WJZZY	J	Lug	AC
LUG7214	QLUGHA009WJZZY	J	Lug	
LUG7215	QLUGHA006WJZZY	J	Lug	AC
LUG7216	QLUGHA006WJZZY	J	Lug	AC
LUG7217	QLUGHA009WJZZY	J	Lug	
LUG7218	QLUGHA006WJZZY	J	Lug	AC
LUG7219	QLUGZA003WJZZY	J	Lug	
LUG7220	QLUGZA003WJZZY	J	Lug	
	PSPAHA474WJZZ	J	Spacer, x1	

Ref. No.	Part No.	★	Description	Code
DUNTKC796FE11 (LC-26GA5U)				
DUNTKC796FE12 (LC-32GA5U)				
CPU UNIT				
INTEGRATED CIRCUITS				
IC8101	RH-IXA817WJZZQ	J	HD6417706F133V	BC
IC8201	RH-IXA948WJN1Q	J	LC4128V-75TN10	
IC8302	RH-IXB319WJZZQ	J	LH28F320BFHE-P	
IC8304	RH-IXA873WJZZY	J	PCA9564PW_118	AS
IC8305	RH-IXA873WJZZY	J	PCA9564PW_118	AS
IC8308	RH-IXB202WJZZQ	J	MT48LC4M32B2P-	BA
IC8401	VHiTC6384AF-2Q	J	TC6384AF-0001	AX
IC8501	VHi7WH126FU-1Y	J	TC7WH126FU	AE
IC8502	VHiPQ1CZ41H-1Y	J	PQ1CZ41H2ZP	AG
IC8503	VHiPQ070XZ1-1Y	J	PQ070XZ01ZP	AF
IC8504	VHiMLC157DT-1Y	J	MC74LCX157DTR2	AE
IC8505	VHiPQ1X331M-1Y	J	PQ1X331M2ZP	AD
TRANSISTORS				
Q8301	VSRT1N141U/-1Y	J	RT1N141U	AB
Q8302	VS2SA1362GR-1Y	J	2SA1362GR	AC
Q8401	VSRTQ035P02-1Y	J	RTQ035P02	AD
DIODES				
D8101	RH-PXA018WJZZY	J	GM1HD55200A	AC
D8102	RH-PXA018WJZZY	J	GM1HD55200A	AC
D8301	VHD1SS355/-1Y	J	Diode	AB
D8501	VHDFS1J3///-1Y	J	Diode	AD
D8502	VHD1SS355/-1Y	J	Diode	AB
D8503	RH-EX1264CEZZY	J	Zener Diode, 10V	AB
D8504	RH-EX1264CEZZY	J	Zener Diode, 10V	AB
D8505	RH-EX1264CEZZY	J	Zener Diode, 10V	AB
PACKAGED CIRCUITS				
X8102	RCRSCA045WJZZY	J	Crystal, 12.288MHz	AG
COIL				
L8501	RCiLPA158WJZZY	J	Coil	AE
CAPACITORS				
C8103	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8104	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8105	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8106	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8107	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8108	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8109	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8110	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8111	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8112	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8113	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8114	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8115	VCCCCY1HH330JY	J	33p 50V Ceramic	AA
C8116	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8117	VCCCCY1HH471JY	J	470p 50V Ceramic	AA
C8118	VCCCCY1HH471JY	J	470p 50V Ceramic	AA
C8119	VCCCCY1HH270JY	J	27p 50V Ceramic	AA
C8120	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8121	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8122	RC-KZA067WJZZY	J	4.7 10V Ceramic	AB
C8123	RC-KZA067WJZZY	J	4.7 10V Ceramic	AB
C8124	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8201	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8202	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8203	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8204	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8205	RC-KZA067WJZZY	J	4.7 10V Ceramic	AB
C8206	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8301	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8302	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8303	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8304	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8305	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C8306	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKC796FE11 (LC-26GA5U)									
DUNTKC796FE12 (LC-32GA5U)									
CPU UNIT (Continued)									
C8307	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8159	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8308	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8160	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8309	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8161	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8310	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8162	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8311	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8163	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8312	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8164	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8313	RC-KZA067WJZZY	J 4.7	10V Ceramic	AB	R8165	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8314	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8166	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8315	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8167	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
C8316	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8168	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8317	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8170	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8401	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8172	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8402	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8173	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8403	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8179	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
C8404	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8180	VRS-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA
C8405	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8181	VRS-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA
C8406	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8182	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8407	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8183	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
C8408	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8201	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8501	VCEASX1CN476MY	J 47	16V Electrolytic	AC	R8202	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8502	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8203	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8503	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8204	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8504	RC-KZA076WJZZY	J 4.7	16V Ceramic	AC	R8205	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8505	VCAAPF0JJ107MY	J 100	6.3V Electrolytic	AF	R8206	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8506	VCKYCY1CB223KY	J 0.022	16V Ceramic	AB	R8207	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8507	VCKYCY1HB471KY	J 470p	50V Ceramic	AA	R8208	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8508	RC-KZA176WJZZY	J 10	10V Ceramic	AC	R8209	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8509	VCEASX1CN476MY	J 47	16V Electrolytic	AC	R8210	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8510	RC-KZA067WJZZY	J 4.7	10V Ceramic	AB	R8211	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8511	VCKYCY1AB105KY	J 1	10V Ceramic	AB	R8212	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8512	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R8213	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8516	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8214	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C8518	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R8215	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
RESISTORS					R8216	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8105	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8217	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8106	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R8218	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8107	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8219	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8108	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8220	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8109	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R8221	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8110	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8222	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8111	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8223	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8112	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8224	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8113	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8225	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8114	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8226	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8115	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8227	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8116	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8228	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8117	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8229	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8118	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8230	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8119	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8231	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8121	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8232	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8122	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8233	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8124	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8234	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8126	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8235	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8128	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8236	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8133	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R8302	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8134	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R8303	VRS-TV1JD222JY	J 2.2k	1/16W Metal Oxide	AA
R8137	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R8304	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R8139	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R8305	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8141	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R8306	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8142	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R8307	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8145	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8308	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8147	VRS-CY1JF106JY	J 10M	1/16W Metal Oxide	AA	R8309	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8148	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8310	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8149	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R8311	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8150	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R8312	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8151	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R8313	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8152	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8314	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8154	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8315	VRK-CD1JJ000JY	J 0	1/16W Metal Compo.	AC
R8156	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8316	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
R8157	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R8317	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
					R8318	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
					R8319	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R8320	VRK-CD1JJ470JY	J 47	1/16W Metal Compo.	AC
					R8321	VRK-CD1JJ000JY	J 0	1/16W Metal Compo.	AC
					R8323	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTKC796FE11 (LC-26GA5U)				
DUNTKC796FE12 (LC-32GA5U)				
CPU UNIT (Continued)				

R8324	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8401	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8402	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R8403	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8404	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8405	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8406	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8407	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8408	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8409	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8410	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8411	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8412	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8413	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8414	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8415	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8416	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8417	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8418	VRS-CH1JF000JY	J 0	1/16W Metal Oxide	AA
R8419	VRS-CY1JF563JY	J 56k	1/16W Metal Oxide	AA
R8420	VRS-CY1JF563JY	J 56k	1/16W Metal Oxide	AA
R8421	VRS-CH1JF563JY	J 56k	1/16W Metal Oxide	AA
R8422	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
R8423	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R8424	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8425	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8501	VRS-CH1JF103JY	J 10k	1/16W Metal Oxide	AA
R8502	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8503	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R8504	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8505	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R8506	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R8507	VRS-CY1JF103FY	J 10k	1/16W Metal Oxide	AA
R8508	VRS-CY1JF563JY	J 56k	1/16W Metal Oxide	AA
R8509	VRS-CY1JF153FY	J 15k	1/16W Metal Oxide	AA
R8510	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8511	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R8512	VRS-CY1JF392FY	J 3.9k	1/16W Metal Oxide	AA
R8513	VRS-CY1JF752FY	J 7.5k	1/16W Metal Oxide	AA
R8514	VRS-CH1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8515	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8516	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8523	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8524	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8529	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8531	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R8534	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8535	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8536	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8537	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8538	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R8539	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R8541	VRS-CY1JF182JY	J 1.8k	1/16W Metal Oxide	AA
R8542	VRS-CY1JF182JY	J 1.8k	1/16W Metal Oxide	AA
R8543	VRS-CY1JF182JY	J 1.8k	1/16W Metal Oxide	AA
R8544	VRS-CY1JF182JY	J 1.8k	1/16W Metal Oxide	AA
R8547	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R8548	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R8549	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA

MISCELLANEOUS PARTS

FB8101	RBLN-0237TAZZY	J	Ferrite Bead	AB
FB8102	RBLN-0237TAZZY	J	Ferrite Bead	AB
FB8103	RBLN-0237TAZZY	J	Ferrite Bead	AB
FB8201	RBLN-0237TAZZY	J	Ferrite Bead	AB
FB8301	RBLN-0237TAZZY	J	Ferrite Bead	AB
FB8501	RBLN-0254TAZZY	J	Ferrite Bead	AB
FB8502	RBLN-0254TAZZY	J	Ferrite Bead	AB
FB8503	RBLN-A022WJZZY	J	Ferrite Bead	AA
FB8504	RBLN-A022WJZZY	J	Ferrite Bead	AA
FB8505	RBLN-A022WJZZY	J	Ferrite Bead	AA

Ref. No.	Part No.	★	Description	Code
P8101	QEARBA005WJFMY J		Grounding Part	AD
P8102	QEARBA005WJFMY J		Grounding Part	AD
P8103	QEARBA005WJFMY J		Grounding Part	AD
P8104	QEARBA005WJFMY J		Grounding Part	AD
P8111	QEARBA005WJFMY J		Grounding Part	AD
P8117	QEARBA005WJFMY J		Grounding Part	AD
P8118	QEARBA005WJFMY J		Grounding Part	AD
P8201	QPLGN0056CEZZY J		Plug, 6-pin	AD
P8502	QPLGNA178WJZZY J		Plug, 9-pin(DP)	AE
P8503	QPLGN0060CEZZY J		Plug, 10-pin	AE
P8506	QPLGNA339WJZZY J		Plug, 5-pin(DU)	AD
SC8401	QSOCZA050WJZZY J		Socket, 12-pin	AH
SC8501	QCNCMA255WJZZY J		Connector, 80-pin	
LUG8211	QLUGHA006WJZZY J		Lug	AC
LUG8212	QLUGHA006WJZZY J		Lug	AC
LUG8213	QLUGHA006WJZZY J		Lug	AC
LUG8214	QLUGHA006WJZZY J		Lug	AC
	QCNW-D364WJQZ J		Connecting Cord (LC-32GA5U)	

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
RDENCA092WJZZ (LC-26GA5U)					Q756	VSDTC124EK/-1	J	DTC124EKA	AB
RDENCA093WJZZ (LC-32GA5U)					Q758	VSDTC114EK/-1	J	DTC114EKA	AB
POWER UNIT					Q759	VSDTC114EK/-1	J	DTC114EKA	AB
INTEGRATED CIRCUITS					DIODES				
IC701	VHIMC33262D-1	J	MC33262D	AK	△ D701	VHDD3SB60//-1	J	Diode	AH
IC702	05000005-R007	J	KIA431A		D702	VHERLZ39B//-1	J	Zener Diode	AC
IC703	VHITNY266P/-1	J	TNY266P	AL	D703	VHERLZ39B//-1	J	Zener Diode	AC
IC704	VHiNJM2125F-1	J	NJM2125F	AE	D704	VHDDAN202K/-1	J	Diode	AB
IC705	VHIOZ961iSN-1	J	OZ961iSN		D705	VHDDFFPF10U60S	J	Diode	AG
IC706	05000005-R007	J	KIA431A		D706	VHDDAN202K/-1	J	Diode	AB
IC707	VHIMP1583P/-1	J	MP1583	AM	D707	VHD1SS355//-1	J	Diode	AB
IC708	VHIMP1583P/-1	J	MP1583	AM	D708	VHD1SS355//-1	J	Diode	AB
IC709	VHIMP1580P/-1	J	MP1580	AL	D709	VHDDAN202K/-1	J	Diode	AB
IC710	VHIMP1583P/-1	J	MP1583	AM	D710	VHERLZ27B/-1	J	Zener Diode	AC
IC711	VHIMP1580DS-1	J	MP1580	AL	D711	VHDDAN202K/-1	J	Diode	AB
IC712	05000005-R007	J	KIA431A		D712	VHD1SS355//-1	J	Diode	AB
IC713	VHiXC6203P502	J	XC6203P502PR	AG	D713	VHDDAN202K/-1	J	Diode	AB
IC714	VHiXC6203P502	J	XC6203P502PR	AG	D714	VHEHZU15B2/-1	J	Zener Diode	AB
TRANSISTORS					D715	VHD1SS355//-1	J	Diode	AB
Q701	VSFQPF12N60C1	J	FQPF12N60C	AL	D716	VHD1SS355//-1	J	Diode	AB
Q702	VSFQPF12N60C1	J	FQPF12N60C	AL	D717	VHD1SS355//-1	J	Diode	AB
Q703	VS2SA1213/-1	J	2SA1213	AE	D718	VHD1SS355//-1	J	Diode	AB
Q704	VS2SA1213/-1	J	2SA1213	AE	D719	VHDSFPL52V/-1	J	Diode	AD
Q705	VS2SC2873/Y-1	J	2SC2873	AD	D720	VHDSFPL64/-1	J	Diode	AE
Q706	VSDTA124EK/-1	J	DTA124EKA	AB	D721	VHDSFPL64/-1	J	Diode	AE
Q707	VSDTA124EK/-1	J	DTA124EKA	AB	D722	VHERLZ8.2A/-1	J	Zener Diode	AC
Q708	VSDTA124EK/-1	J	DTA124EKA	AB	D723	VHDRLS245//-1	J	Diode	AB
Q709	VSDTD114EK/-1	J	DTD114EKA	AC	D724	VHD1SS355//-1	J	Diode	AB
Q710	VS2SK3520-01M	J	2SK3520-01MR		D725	VHDRLS245//-1	J	Diode	AB
Q711	VS2SK3520-01M	J	2SK3520-01MR		D726	VHD1SS355//-1	J	Diode	AB
Q712	VS2SD1781KQ-1	J	2SD1781	AC	D727	VHDRLS245//-1	J	Diode	AB
Q713	VSDTA143EK/-1	J	DTA143EKA	AA	D728	VHD1SS355//-1	J	Diode	AB
Q714	VS2SC2411KR-1	J	2SC2411KR	AC	D729	VHDRLS245//-1	J	Diode	AB
Q715	VS2SB1198K/-1	J	2SB1198	AD	D730	VHD1SS355//-1	J	Diode	AB
Q716	VS2SC2412K/-1	J	2SC2412K	AA	D731	VHD1SS355//-1	J	Diode	AB
Q717	VS2SK3518-01M	J	2SK3518-01MR		D732	VHD1SS355//-1	J	Diode	AB
Q718	VS2SC2873/Y-1	J	2SC2873	AD	D733	VHD1SS355//-1	J	Diode	AB
Q719	VS2SK3518-01M	J	2SK3518-01MR		D734	VHDRLS245//-1	J	Diode	AB
Q720	VS2SC2873/Y-1	J	2SC2873	AD	D735	VHD1SS355//-1	J	Diode	AB
Q721	VS2SK3518-01M	J	2SK3518-01MR		D736	VHD1SS355//-1	J	Diode	AB
Q722	VS2SC2873/Y-1	J	2SC2873	AD	D737	VHEHZU16B2/-1	J	Zener Diode	
Q723	VS2SK3518-01M	J	2SK3518-01MR		D739	VHDSFPB74/-1	J	Diode	AD
Q724	VS2SC2873/Y-1	J	2SC2873	AD	D740	VHEHZU6.8B2-1	J	Zener Diode	AC
Q725	VS2SC2412K/-1	J	2SC2412K	AA	D741	VHDSFPB74/-1	J	Diode	AD
Q726	VS3LN01C-/-1	J	3LN01C		D742	VHEHZU12B3/-1	J	Zener Diode	AC
Q727	VS3LN01C-/-1	J	3LN01C		D743	VHDDAN217/-1	J	Diode	AH
Q728	VS2SA1037AK-1	J	2SA1037	AB	D744	VHDDAN217/-1	J	Diode	AH
Q729	VS2SA1213/-1	J	2SA1213	AE	D745	VHDDAN217/-1	J	Diode	AH
Q730	VS2SC2873/Y-1	J	2SC2873	AD	D746	VHD1SS355//-1	J	Diode	AB
Q731	VS2SA1213/-1	J	2SA1213	AE	D747	VHEHZU16B1/-1	J	Zener Diode	AB
Q732	VS2SC2873/Y-1	J	2SC2873	AD	D748	VHEHZU16B2/-1	J	Zener Diode	
Q733	VS2SD1781KQ-1	J	2SD1781	AC	D749	VHERLZ36B/-1	J	Zener Diode	AC
Q734	VS2SK3236//-1	J	2SK3236	AL	D750	VHEHZU5.1B2-1	J	Zener Diode	AC
Q735	VS2SA1036KQRC	J	2SA1036		D751	VHEHZU5.1B2-1	J	Zener Diode	AC
Q736	VS2SC2411KR-1	J	2SC2411KR	AC	D752	VHDSFPB74/-1	J	Diode	AD
Q737	VSDTC124EK/-1	J	DTC124EKA	AB	D753	VHDSFPB74/-1	J	Diode	AD
Q738	VSDTC124EK/-1	J	DTC124EKA	AB	D754	VHEHZU12B3/-1	J	Zener Diode	AC
Q739	VSDTC124EK/-1	J	DTC124EKA	AB	D756	VHDSFPB74/-1	J	Diode	AD
Q740	VS2SD1782K/-1	J	2SD1782		D757	VHDRLS245//-1	J	Diode	AB
Q741	VSDTC124EK/-1	J	DTC124EKA	AB	D758	VHD1SS355//-1	J	Diode	AB
Q742	VSDTC124EK/-1	J	DTC124EKA	AB	D759	VHD1SS355//-1	J	Diode	AB
Q743	VS2SC2411KR-1	J	2SC2411KR	AC	D760	VHERLZ8.2A/-1	J	Zener Diode	AC
Q744	VSDTC124EK/-1	J	DTC124EKA	AB	D761	VHD1SS355//-1	J	Diode	AB
Q745	VSDTC124EK/-1	J	DTC124EKA	AB	D762	VHD1SS355//-1	J	Diode	AB
Q746	VSDTC124EK/-1	J	DTC124EKA	AB	D763	VHDS1WBA60B-1	J	Diode	AG
Q747	VSDTA124EK/-1	J	DTA124EKA	AB	D764	VHD1SS355//-1	J	Diode	AB
Q748	VSDTA114EK/-1	J	DTA114EKA	AB	D765	VHD1SS355//-1	J	Diode	AB
Q749	VS2SC2411KR-1	J	2SC2411KR	AC	D766	VHDRLS245//-1	J	Diode	AB
Q750	VSDTC124EK/-1	J	DTC124EKA	AB	D767	VHDRLS245//-1	J	Diode	AB
Q751	VS2SK3236//-1	J	2SK3236	AL	D768	VHDSFPL52V/-1	J	Diode	AD
Q753	VSDTC124EK/-1	J	DTC124EKA	AB	D769	VHDSFPB74/-1	J	Diode	AD
Q754	VSDTC124EK/-1	J	DTC124EKA	AB	D771	VHDRLS245//-1	J	Diode	AB
Q755	VSDTA114EK/-1	J	DTA114EKA	AB	D774	VHD1SS355//-1	J	Diode	AB
					D775	VHDSFPB74/-1	J	Diode	AD

Ref. No.	Part No.	★	Description	Code
RDENCA071WJZZ (LC-26GA4U) RDENCA095WJZZ (LC-26GA4D) POWER UNIT (Continued)				
D776	VHDSFPB74/-1	J	Diode	AD
D777	VHDSFPB74/-1	J	Diode	AD
D779	VHDSFPB74/-1	J	Diode	AD
D780	VHD1SS355/-1	J	Diode	AB
D781	VHD1SS355/-1	J	Diode	AB
D782	VHD1SS355/-1	J	Diode	AB
△ D783	VHD1SS355/-1	J	Diode	AB
D784	VHD1SS355/-1	J	Diode	AB
D785	VHD1SS355/-1	J	Diode	AB
D786	VHD1SS355/-1	J	Diode	AB
D787	VHD1SS355/-1	J	Diode	AB
D788	VHDSFPB74/-1	J	Diode	AD
D789	VRS-TP2BD000J	J	0 1/8W Metal Oxide	AA
D790	VHD1SS355/-1	J	Diode	AB
D791	VHDSFPL52V/-1	J	Diode	AD
D792	VHDSFPL52V/-1	J	Diode	AD
D793	VHERLZ36B/-1	J	Zener Diode	AC
△ VA701	VHVTNR10V471K	J	Varistor, TNR10V471K	AD
△ VA702	VHVTNR10V471K	J	Varistor, TNR10V471K	AD
△ VA703	VHVTNR10V471K	J	Varistor, TNR10V471K	AD
PACKAGED CIRCUITS				
△ PC701	VHPPC123X2YFZ	J	PC123X2YFZ	AD
△ PC702	VHPPC123X2YFZ	J	PC123X2YFZ	AD
△ PC703	VHPPC123X2YFZ	J	PC123X2YFZ	AD
△ PC704	VHPPC123X2YFZ	J	PC123X2YFZ	AD
△ PC705	VHPPC123X2YFZ	J	PC123X2YFZ	AD
△ PC706	VHPPC123X2YFZ	J	PC123X2YFZ	AD
COILS				
△ L701	91320137-R001	J	Line Filter	
△ L702	91320137-R001	J	Line Filter	
L703	RCiLC1289SNEZ	J	Choke Coil	
L704	RCiLC1273SNEZ	J	Choke Coil	AE
L705	97000360-R00P	J	Choke Coil	
L706	RCiLC1279SNEZ	J	Choke Coil	AE
L707	RCiLC1279SNEZ	J	Choke Coil	AE
L708	RCiLC1262SNEZ	J	Choke Coil	AF
L709	RCiLC1280SNEZ	J	Choke Coil	AF
L710	RCiLC1279SNEZ	J	Choke Coil	AE
L711	RCiLC1279SNEZ	J	Choke Coil	AE
L712	RCiLC1281SNEZ	J	Choke Coil	AD
L713	RCiLC1252SNEZ	J	Choke Coil	AE
L714	97000360-R00P	J	Choke Coil	
△ L716	91320137-R001	J	Line Filter	
TRANSFORMERS				
△ T701	RTRNP1266SNEZ	J	Transformer	
T702	RTRNP1261SNEZ	J	Transformer	AF
△ T703	RTRNP1277SNEZ	J	Transformer	
△ T704	RTRNP1268SNEZ	J	Transformer	
△ T705	RTRNP1268SNEZ	J	Transformer	
△ T706	RTRNP1272SNEZ	J	Transformer	
TH701	VHSM5R110C/-1	J	Thermistor, M5R110C	AF
TH702	VHSM8R207C/-1	J	Thermistor, SCK08082	AE
CAPACITORS				
△ C701	RCM2E224LEMSC	J	0.22 275V Film	AD
△ C702	RCM2E224LEMSC	J	0.22 275V Film	AD
△ C703	01013020-R002	J	2200p 250V Ceramic	
△ C704	01013020-R002	J	2200p 250V Ceramic	
△ C705	01013020-R002	J	2200p 250V Ceramic	
C706	RC-M2G824MDSC	J	0.82 400V Film	AG
C707	RC-M2G824MDSC	J	0.82 400V Film	AG
C708	RCK45R3D221KV	J	220 2kV Ceramic	AC
C709	RC-E2W686KXGZ	J	68 450V Electrolytic	AL
C710	RC-E2W686KXGZ	J	68 450V Electrolytic	AL
C711	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C712	RC-E1H226SNKY	J	22 50V Electrolytic	AD
C713	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C714	VCKYTV1EB224K	J	0.22 25V Ceramic	AB

Ref. No.	Part No.	★	Description	Code
C715	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C716	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C717	VCKYCY1HB473K	J	0.047 50V Ceramic	AA
C718	VCKYTV1VB105K	J	1 35V Ceramic	AC
C719	VCKYCY1HB222K	J	2200p 50V Ceramic	AA
C720	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C721	VCKYCY1EB104K	J	0.1 25V Ceramic	AA
C722	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C723	RCM2W334HCE-S	J	0.33 450V Film	AF
C724	VCKYTV1EB224K	J	0.22 25V Ceramic	AB
C725	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C726	VCKYCY1EB104K	J	0.1 25V Ceramic	AA
C727	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C728	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
△ C729	RC-CSE2GA332M	J	3300p 250V Ceramic	
△ C730	RC-CSE2GA332M	J	3300p 250V Ceramic	
C731	VCKYCY1EB104K	J	0.1 25V Ceramic	AA
C732	RC-E1H226SNKY	J	22 50V Electrolytic	AD
C733	RCK45R3D471KV	J	470 2kV Ceramic	AC
C734	RC-E2W336KXGZ	J	33 450V Electrolytic	AK
C735	VCKYCY1EB104K	J	0.1 25V Ceramic	AA
C736	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C739	RCM2W224HCE-S	J	0.22 450V Film	AF
C740	VCKYCY1EB104K	J	0.1 25V Ceramic	AA
C741	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C742	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C743	VCKYCY1AB105K	J	1 10V Ceramic	AA
C744	VCKYTV1AB475K	J	4.7 10V Ceramic	AC
C745	VCKYTV1EB224K	J	0.22 25V Ceramic	AB
C746	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C747	VCKYCY1AB105K	J	1 10V Ceramic	AA
C748	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C749	VCKYCY1HB152K	J	1500p 50V Ceramic	AA
C750	VCKYCY1HB683K	J	0.068 50V Ceramic	AB
C751	VCCCCY1HH221J	J	220p 50V Ceramic	AA
C752	VCKYCY1HB683K	J	0.068 50V Ceramic	AB
C753	VCKYTV1HB224K	J	0.22 50V Ceramic	AB
C754	VCKYTV1HB224K	J	0.22 50V Ceramic	AB
C755	VCKYCY1HB472K	J	4700p 50V Ceramic	AA
C756	VCCCCY1HH221J	J	220p 50V Ceramic	AA
C757	01011264-R00A	J	1000 25V Electrolytic	
C758	01011264-R00A	J	1000 25V Electrolytic	
C760	VCKYTV1CB474K	J	0.47 16V Ceramic	AC
C762	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C763	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C764	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C765	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C766	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C767	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C769	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C770	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C771	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C772	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C773	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C774	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C775	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C776	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C777	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C778	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C779	VCKYTV2AR333K	J	0.033 100V Ceramic	
C780	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C781	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C782	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C783	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C784	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C785	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C786	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C787	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C788	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C789	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C790	RC-E1V107SNKY	J	100 35V Electrolytic	AD
C791	RC-E1E337SKZE	J	330 25V Electrolytic	AD
C792	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C793	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C794	VCCCCY1HH101J	J	100p 50V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
RDENCA071WJZZ									
POWER UNIT (Continued)									
C795	VCKYCY1HB102K	J	1000p 50V Ceramic	AA	R724	VRS-TS2AD271J	J	270 1/10W Metal Oxide	AA
C796	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R725	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA
C797	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R726	RR-RVC32754F1	J	750k 1/8W Metal Oxide	AC
C798	VCKYCY1AB105K	J	1 10V Ceramic	AA	R727	RR-RVC32824F1	J	820k 1/8W Metal Oxide	AC
C799	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R728	RR-RVC32754F1	J	750k 1/8W Metal Oxide	AC
C800	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R729	RR-RVC32105F1	J	1M 1/10W Metal Oxide	AC
C801	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R730	VRS-TS2AD103F	J	10k 1/10W Metal Oxide	AA
C803	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R731	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
C804	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R732	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
C805	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R733	VRS-TS2AD103F	J	10k 1/10W Metal Oxide	AA
△ C806	RC-M2E473RESC	J	0.047 275V Film	AE	R734	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
C808	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R735	VRS-TS2AD103F	J	10k 1/10W Metal Oxide	AA
C809	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R736	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA
C810	RC-E1H105SNKY	J	1 50V Electrolytic	AD	R737	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
C811	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R738	VRS-TS2AD104J	J	100k 1/10W Metal Oxide	AA
C812	VCKYCY1AB105K	J	1 10V Ceramic	AA	R739	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
C813	VCKYCY1HB473K	J	0.047 50V Ceramic	AA	R740	VRS-TS2AD562J	J	5.6k 1/10W Metal Oxide	AA
C814	VCKYCY1HB332K	J	3300p 50V Ceramic	AA	R741	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
C815	VCKYCY1HB332K	J	3300p 50V Ceramic	AA	R742	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
C816	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R743	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
C823	VCKYCY1HB102K	J	1000p 50V Ceramic	AA	R744	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
C824	VCKYCY1HB102K	J	1000p 50V Ceramic	AA	R745	VRS-TP2BD3R3J	J	3.3 1/8W Metal Oxide	
C825	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R746	VRS-TP2BD274J	J	270k 1/8W Metal Oxide	
C826	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R747	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
C828	VCKYCY1HB103K	J	0.01 50V Ceramic	AA	R748	VRS-TP2BD331J	J	330 1/8W Metal Oxide	AA
C829	VCKYCY1EB223K	J	0.022 25V Ceramic	AA	R749	VRS-TP2BD224J	J	220k 1/8W Metal Oxide	AA
C830	VCKYTV1AB225K	J	2.2 10V Ceramic	AC	R750	VRS-TP2BD224J	J	220k 1/8W Metal Oxide	AA
C831	VCKYCY1HB332K	J	3300p 50V Ceramic	AA	R751	VRS-TP2BD184J	J	180k 1/8W Metal Oxide	
C832	RC-E1H226SNKY	J	22 50V Electrolytic	AD	R752	VRS-TP2BD184J	J	180k 1/8W Metal Oxide	
C833	VCKYCY1HB102K	J	1000p 50V Ceramic	AA	R753	VRS-TP2BD184J	J	180k 1/8W Metal Oxide	
C834	RC-E1V107SNKY	J	100 35V Electrolytic	AD	R754	RR-HRSM1R5J3W	J	1.5 3W Metal Oxide	AD
C835	VCCCCY1HH221J	J	220p 50V Ceramic	AA	R755	VRS-TS2AD183J	J	18k 1/10W Metal Oxide	AA
C836	VCCCCY1HH221J	J	220p 50V Ceramic	AA	R756	VRS-TP2BD224J	J	220k 1/8W Metal Oxide	AA
C838	VCCCCY1HH101J	J	100p 50V Ceramic	AA	R757	VRS-TP2BD221J	J	220 1/8W Metal Oxide	
C839	VCCCCY1HH101J	J	100p 50V Ceramic	AA	R758	VRS-TP2BD221J	J	220 1/8W Metal Oxide	
△ C840	RC-CSE2GA332M	J	3300p 250V Ceramic		R759	VRS-TP2BD102J	J	1k 1/8W Metal Oxide	AA
△ C841	RC-CSE2GA332M	J	3300p 250V Ceramic		R760	VRS-TP2BD272J	J	2.7k 1/8W Metal Oxide	AA
C842	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R761	VRS-TS2AD151J	J	150 1/10W Metal Oxide	AA
C843	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R762	VRS-TS2AD222J	J	2.2k 1/10W Metal Oxide	AA
C844	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R763	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA
C845	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R764	VRS-TS2AD122J	J	1.2k 1/10W Metal Oxide	AA
C847	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R765	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
C848	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R766	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
C849	VCKYCY1EB104K	J	0.1 25V Ceramic	AA	R767	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
C850	VCCCCY1HH221J	J	220p 50V Ceramic	AA	R768	VRS-TS2AD100J	J	10 1/10W Metal Oxide	AA
C851	01011662-R00A	J	150 50V Electrolytic		R769	VRS-TS2AD220J	J	22 1/10W Metal Oxide	AA
RESISTORS					R770	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
△ R701	RR-RCR60-395JB	J	3.9M 1W Metal Oxide		R771	VRS-TS2AD100J	J	10 1/10W Metal Oxide	AA
△ R702	RR-RCR60-395JB	J	3.9M 1W Metal Oxide		R772	VRS-TS2AD220J	J	22 1/10W Metal Oxide	AA
R703	VRS-TP2BD124J	J	120k 1/8W Metal Oxide		R773	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
R704	VRS-TP2BD124J	J	120k 1/8W Metal Oxide		R774	VRS-TS2AD100J	J	10 1/10W Metal Oxide	AA
R705	VRS-TP2BD124J	J	120k 1/8W Metal Oxide		R775	VRS-TS2AD220J	J	22 1/10W Metal Oxide	AA
R706	VRS-TP2BD124J	J	120k 1/8W Metal Oxide		R776	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
R707	VRS-RE3DA223J	J	22k 2W Metal Oxide		R777	VRS-TS2AD100J	J	10 1/10W Metal Oxide	AA
R708	VRS-RE3DA223J	J	22k 2W Metal Oxide		R778	VRS-TS2AD220J	J	22 1/10W Metal Oxide	AA
R709	RR-RVC20105-1	J	1M 1/10W Metal Oxide	AB	R779	VRS-TS2AD203F	J	20k 1/10W Metal Oxide	AA
R710	RR-RVC20105-1	J	1M 1/10W Metal Oxide	AB	R780	VRS-TS2AD202F	J	2k 1/10W Metal Oxide	AA
R711	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA	R781	VRS-TS2AD202F	J	2k 1/10W Metal Oxide	AA
R712	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA	R782	VRS-TS2AD243F	J	24k 1/10W Metal Oxide	AA
R713	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB	R783	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA
R714	VRS-TS2AD183J	J	18k 1/10W Metal Oxide	AA	R784	VRS-TS2AD202F	J	2k 1/10W Metal Oxide	AA
R715	VRS-TP2BD120J	J	12 1/8W Metal Oxide		R785	VRS-TS2AD243F	J	24k 1/10W Metal Oxide	AA
R716	RR-HRNMNR15J2C	J	0.15 2W Metal Oxide	AD	R786	VRS-TS2AD203F	J	20k 1/10W Metal Oxide	AA
R717	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA	R787	VRS-TS2AD752F	J	7.5k 1/10W Metal Oxide	AA
R718	RR-HRNMNR15J2C	J	0.15 2W Metal Oxide	AD	R788	VRS-TS2AD220J	J	22 1/10W Metal Oxide	AA
R719	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA	R789	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R720	VRS-TS2AD183J	J	18k 1/10W Metal Oxide	AA	R790	VRS-TS2AD104J	J	100k 1/10W Metal Oxide	AA
R721	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB	R792	VRS-TS2AD154F	J	150k 1/10W Metal Oxide	
R722	VRS-TP2BD120J	J	12 1/8W Metal Oxide		R793	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R723	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA	R794	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
					R795	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
					R796	VRS-TS2AD272J	J	2.7k 1/10W Metal Oxide	AA
					R797	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
					R798	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
					R799	VRS-TS2AD331J	J	330 1/10W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
RDENCA071WJZZ (LC-26GA4U)				
RDENCA095WJZZ (LC-26GA4D)				
POWER UNIT (Continued)				
R800	VRS-TS2AD114F	J	110k 1/10W Metal Oxide	AA
R801	VRS-TS2AD363F	J	36k 1/10W Metal Oxide	AA
R802	VRS-TS2AD272J	J	2.7k 1/10W Metal Oxide	AA
R803	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
R804	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R805	VRS-TS2AD331J	J	330 1/10W Metal Oxide	AA
R806	VRS-TS2AD132J	J	1.3k 1/10W Metal Oxide	AA
R807	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R808	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R809	VRS-TP2BD102J	J	1k 1/8W Metal Oxide	AA
R810	VRS-TS2AD821J	J	820 1/10W Metal Oxide	AA
R811	VRS-TP2BD152J	J	1.5k 1/8W Metal Oxide	AA
R812	VRS-TS2AD222J	J	2.2k 1/10W Metal Oxide	AA
R813	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
R814	VRS-TS2AD471J	J	470 1/10W Metal Oxide	AA
R815	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
R817	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R818	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R819	VRS-TS2AD622F	J	6.2k 1/10W Metal Oxide	AA
R820	VRS-TS2AD471F	J	470 1/10W Metal Oxide	AA
R821	VRS-TS2AD102F	J	1k 1/10W Metal Oxide	AA
R822	VRS-TS2AD472J	J	4.7k 1/10W Metal Oxide	AA
R823	VRS-TS2AD472J	J	4.7k 1/10W Metal Oxide	AA
R824	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R825	VRS-TS2AD471J	J	470 1/10W Metal Oxide	AA
R826	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R827	VRS-TS2AD393F	J	39k 1/10W Metal Oxide	AA
R828	VRS-TS2AD103F	J	10k 1/10W Metal Oxide	AA
R829	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R830	VRS-TS2AD593F	J	59k 1/10W Metal Oxide	AA
R831	VRS-TS2AD822F	J	8.2k 1/10W Metal Oxide	AA
R832	VRS-TS2AD471J	J	470 1/10W Metal Oxide	AA
R833	VRS-TS2AD332J	J	3.3k 1/10W Metal Oxide	AA
R834	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R835	VRS-TS2AD133F	J	13k 1/10W Metal Oxide	AA
R836	VRS-TS2AD752F	J	7.5k 1/10W Metal Oxide	AA
R837	VRS-TS2AD471J	J	470 1/10W Metal Oxide	AA
R838	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R839	VRS-TS2AD332F	J	3.3k 1/10W Metal Oxide	AA
R840	VRS-TS2AD682F	J	6.8k 1/10W Metal Oxide	AA
R841	VRS-TS2AD471J	J	470 1/10W Metal Oxide	AA
R842	VRS-TS2AD471J	J	470 1/10W Metal Oxide	AA
R843	VRS-TS2AD593F	J	59k 1/10W Metal Oxide	AA
R844	VRS-TS2AD822F	J	8.2k 1/10W Metal Oxide	AA
R845	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R846	VRS-TS2AD472J	J	4.7k 1/10W Metal Oxide	AA
R847	VRS-TS2AD472J	J	4.7k 1/10W Metal Oxide	AA
R848	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
R849	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R850	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R851	VRS-TS2AD133F	J	13k 1/10W Metal Oxide	AA
R852	VRS-TS2AD912F	J	9.1k 1/10W Metal Oxide	AA
R853	VRS-TS2AD562J	J	5.6k 1/10W Metal Oxide	AA
R854	VRS-TS2AD222J	J	2.2k 1/10W Metal Oxide	AA
R855	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R856	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R857	VRS-TS2AD152J	J	1.5k 1/10W Metal Oxide	AA
R858	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R859	RR-HRNMR47J2F	J	0.47 2W Metal Oxide	AD
R860	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R861	VRS-TS2AD561J	J	560 1/10W Metal Oxide	AA
R862	VRS-TP2BD274J	J	270k 1/8W Metal Oxide	AA
R863	VRS-TS2AD472J	J	4.7k 1/10W Metal Oxide	AA
R864	VRS-TP2BD3R3J	J	3.3 1/8W Metal Oxide	AA
R865	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
R866	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R867	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA
R874	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R875	VRS-TS2AD224J	J	220k 1/10W Metal Oxide	AA
R876	VRS-TS2AD103J	J	10k 1/10W Metal Oxide	AA
R877	VRS-TS2AD203F	J	20k 1/10W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R878	VRS-TS2AD752F	J	7.5k 1/10W Metal Oxide	AA
R879	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
R880	VRS-TS2AD221J	J	220 1/10W Metal Oxide	AA
R881	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
R882	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
R883	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
R884	VRS-TS2AD681J	J	680 1/10W Metal Oxide	AA
R885	VRS-TP2BD000J	J	0 1/8W Metal Oxide	AA
R886	VRS-TP2BD000J	J	0 1/8W Metal Oxide	AA
R887	VRS-TP2BD000J	J	0 1/8W Metal Oxide	AA
R888	VRS-TS2AD101J	J	100 1/10W Metal Oxide	AA
R889	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R890	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R891	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R893	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R894	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R895	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R900	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R901	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R902	VRS-TS2AD102J	J	1k 1/10W Metal Oxide	AA
R903	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R904	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB
R905	VRS-TP2BD000J	J	0 1/8W Metal Oxide	AA
R906	VRS-TS2AD223J	J	22k 1/10W Metal Oxide	AA
R907	VRS-TS2AD000J	J	0 1/10W Metal Oxide	AB

MISCELLANEOUS PARTS

△ CN701	QSOCA1014SNEZ	J	AC Inlet	AF
CN702	QCNCM1833SNEZ	J	Connector, 2-pin	AB
CN703	QCNCM1827SNEZ	J	Connector, 12-pin	AD
CN704	QCNCM1853SNEZ	J	Connector, 16-pin	
CN705	QCNCM1853SNEZ	J	Connector, 16-pin	
CN706	QCNCM1854SNEZ	J	Connector, 20-pin	
CN707	QCNCM1840SNEZ	J	Connector, 9-pin	
CN708	QCNCM1827SNEZ	J	Connector, 12-pin	AD
△ F701	QFS-A1130SNEZ	J	Fuse, 3.15A/250V	AF
△ F702	QFS-A1130SNEZ	J	Fuse, 3.15A/250V	AF
△ F703	QFS-A1129SNEZ	J	Fuse, 2A/250VTR5(382)	AF
△ F704	QFS-T1107SNEZ	J	Fuse, 117°C/2AP110A	AE
△ F705	QFS-A1154SNEZ	J	Fuse, 1A/DC450V	AL
△ GA701	VHVRA-302M-V7	J	RA-302M-V7	
△ RL701	RRLYD1012SNEZ	J	G5RL1ADC5	
	LANGK3001SNEZ	J	Inlet Angle	AG
	LX-BZ1001SNEZ	J	Screw, x2	AB
	03700481-R003	J	Heat Sink-A	
	03700482-R003	J	Heat Sink-B	
	XBPSN30P08ES0	J	Screw, x10	AB

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
RUNTKA094WJZZ (LC-26GA5U)									
INVERTER UNIT									
DIODES									
D7501	VHDDAN217U/-1	J	Diode	AC	C7539	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
D7502	VHDDAN217U/-1	J	Diode	AC	C7540	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
D7503	VHDDAN217U/-1	J	Diode	AC	C7541	VCKYTV1EB475K	J	4.7 25V Ceramic	
D7504	VHDDAN217U/-1	J	Diode	AC	C7542	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC
D7505	VHDDAN217U/-1	J	Diode	AC	C7543	RC-ECC3H120JY	J	12p 5kV Ceramic	
D7506	VHDDAN217U/-1	J	Diode	AC	C7544	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
D7507	VHDDAN217U/-1	J	Diode	AC	C7545	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
D7508	VHDDAN217U/-1	J	Diode	AC	C7546	VCKYTV1EB475K	J	4.7 25V Ceramic	
D7509	VHDDAN217U/-1	J	Diode	AC	C7547	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC
D7510	VHDDAN217U/-1	J	Diode	AC	C7548	RC-ECC3H120JY	J	12p 5kV Ceramic	
D7511	VHDDAN217U/-1	J	Diode	AC	C7549	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
D7512	VHDDAN217U/-1	J	Diode	AC	C7550	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
D7513	VHDDAN217U/-1	J	Diode	AC	C7551	VCKYTV1EB475K	J	4.7 25V Ceramic	
D7514	VHDDAN217U/-1	J	Diode	AC	C7552	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC
TRANSFORMERS					C7553	RC-ECC3H120JY	J	12p 5kV Ceramic	
T7501	RTRNZ1274SNEZ	J	Transformer		C7554	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
T7502	RTRNZ1274SNEZ	J	Transformer		C7555	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
T7503	RTRNZ1274SNEZ	J	Transformer		C7556	VCKYTV1EB475K	J	4.7 25V Ceramic	
T7504	RTRNZ1274SNEZ	J	Transformer		C7557	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC
T7505	RTRNZ1273SNEZ	J	Transformer		C7558	RC-ECC3H120JY	J	12p 5kV Ceramic	
T7506	RTRNZ1274SNEZ	J	Transformer		C7559	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
T7507	RTRNZ1273SNEZ	J	Transformer		C7560	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
T7508	RTRNZ1273SNEZ	J	Transformer		C7561	VCKYTV1EB475K	J	4.7 25V Ceramic	
T7509	RTRNZ1274SNEZ	J	Transformer		C7562	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC
T7510	RTRNZ1273SNEZ	J	Transformer		C7563	RC-ECC3H120JY	J	12p 5kV Ceramic	
T7511	RTRNZ1274SNEZ	J	Transformer		C7564	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
T7512	RTRNZ1274SNEZ	J	Transformer		C7565	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
T7513	RTRNZ1274SNEZ	J	Transformer		C7566	VCKYTV1EB475K	J	4.7 25V Ceramic	
T7514	RTRNZ1274SNEZ	J	Transformer		C7567	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC
CAPACITORS					C7568	RC-ECC3H120JY	J	12p 5kV Ceramic	
C7501	VCKYTV1EB475K	J	4.7 25V Ceramic		C7569	VCKYCY1HB153K	J	0.015 50V Ceramic	AA
C7502	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC	C7570	VCKYCY1HB682K	J	6800p 50V Ceramic	AA
C7503	RC-ECC3H120JY	J	12p 5kV Ceramic		C7571	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C7504	VCKYCY1HB153K	J	0.015 50V Ceramic	AA	RESISTORS				
C7505	VCKYCY1HB682K	J	6800p 50V Ceramic	AA	R7501	VRS-CY1JD105J	J	1M 1/10W Metal Oxide	AA
C7506	VCKYTV1EB475K	J	4.7 25V Ceramic		R7502	VRS-TW2ED000J	J	0 1/4W Metal Oxide	AB
C7507	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC	R7503	VRS-TW2ED000J	J	0 1/4W Metal Oxide	AB
C7508	RC-ECC3H120JY	J	12p 5kV Ceramic		R7504	VRS-TW2ED000J	J	0 1/4W Metal Oxide	AB
C7509	VCKYCY1HB153K	J	0.015 50V Ceramic	AA	MISCELLANEOUS PARTS				
C7510	VCKYCY1HB682K	J	6800p 50V Ceramic	AA	CN7501	QCNCM1827SNEZ	J	Connector, 12-pin	AD
C7511	VCKYTV1EB475K	J	4.7 25V Ceramic		CN7502	QCNCM1827SNEZ	J	Connector, 12-pin	AD
C7512	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC	CN7503	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7513	RC-ECC3H120JY	J	12p 5kV Ceramic		CN7504	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7514	VCKYCY1HB153K	J	0.015 50V Ceramic	AA	CN7505	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7515	VCKYCY1HB682K	J	6800p 50V Ceramic	AA	CN7506	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7516	VCKYTV1EB475K	J	4.7 25V Ceramic		CN7507	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7517	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC	CN7508	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7518	RC-ECC3H120JY	J	12p 5kV Ceramic		CN7509	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7519	VCKYCY1HB153K	J	0.015 50V Ceramic	AA	LUG7501	QTAND1019SNEZ	J	Lug	AD
C7520	VCKYCY1HB682K	J	6800p 50V Ceramic	AA	LUG7502	QTAND1019SNEZ	J	Lug	AD
C7521	VCKYTV1EB475K	J	4.7 25V Ceramic		LUG7503	QTAND1019SNEZ	J	Lug	AD
C7522	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC					
C7523	RC-ECC3H120JY	J	12p 5kV Ceramic						
C7524	VCKYCY1HB153K	J	0.015 50V Ceramic	AA					
C7525	VCKYCY1HB682K	J	6800p 50V Ceramic	AA					
C7526	VCKYTV1EB475K	J	4.7 25V Ceramic						
C7527	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC					
C7528	RC-ECC3H120JY	J	12p 5kV Ceramic						
C7529	VCKYCY1HB153K	J	0.015 50V Ceramic	AA					
C7530	VCKYCY1HB682K	J	6800p 50V Ceramic	AA					
C7531	VCKYTV1EB475K	J	4.7 25V Ceramic						
C7532	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC					
C7533	RC-ECC3H120JY	J	12p 5kV Ceramic						
C7534	VCKYCY1HB153K	J	0.015 50V Ceramic	AA					
C7535	VCKYCY1HB682K	J	6800p 50V Ceramic	AA					
C7536	VCKYTV1EB475K	J	4.7 25V Ceramic						
C7537	VCKYTQ2AB473K	J	0.047 100V Ceramic	AC					
C7538	RC-ECC3H120JY	J	12p 5kV Ceramic						

Ref. No.	Part No.	★	Description	Code
RUNTKA095WJZZ (LC-26GA5U) INVERTER-GND UNIT				
TRANSISTORS				
Q7601	VSUM6K1N///-1	J	UM6K1N	AD
Q7602	VSUM6K1N///-1	J	UM6K1N	AD
Q7603	VSUM6K1N///-1	J	UM6K1N	AD
Q7604	VSUM6K1N///-1	J	UM6K1N	AD
Q7605	VSUM6K1N///-1	J	UM6K1N	AD
Q7606	VSUM6K1N///-1	J	UM6K1N	AD
Q7608	VSUM6K1N///-1	J	UM6K1N	AD
Q7609	VSUM6K1N///-1	J	UM6K1N	AD
Q7610	VSUM6K1N///-1	J	UM6K1N	AD
Q7611	VSUM6K1N///-1	J	UM6K1N	AD
Q7612	VSUM6K1N///-1	J	UM6K1N	AD
Q7613	VSUM6K1N///-1	J	UM6K1N	AD
Q7614	VSUM6K1N///-1	J	UM6K1N	AD
DIODES				
D7601	VHD1SS355// -1	J	Diode	AB
D7602	VHD1SS355// -1	J	Diode	AB
D7603	VHD1SS355// -1	J	Diode	AB
D7604	VHD1SS355// -1	J	Diode	AB
D7605	VHD1SS355// -1	J	Diode	AB
D7606	VHD1SS355// -1	J	Diode	AB
D7608	VHD1SS355// -1	J	Diode	AB
D7609	VHD1SS355// -1	J	Diode	AB
D7610	VHD1SS355// -1	J	Diode	AB
D7611	VHD1SS355// -1	J	Diode	AB
D7612	VHD1SS355// -1	J	Diode	AB
D7613	VHD1SS355// -1	J	Diode	AB
D7614	VHD1SS355// -1	J	Diode	AB
D7621	VHDDAN217U/-1	J	Diode	AC
TH7606	VHH18XH103J03	J	Thermistor	AC
CAPACITORS				
C7601	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7602	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7603	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7604	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7605	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7606	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7608	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7609	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7610	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7611	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7612	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7613	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
C7614	VCKYCY1CB224K	J	0.22 16V Ceramic	AB
RESISTORS				
R7601	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7603	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7605	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7607	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7609	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7611	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7613	VRS-CY1JD332F	J	3.3k 1/10W Metal Oxide	AA
R7614	VRS-CY1JD242F	J	2.4k 1/10W Metal Oxide	AA
R7615	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7617	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7619	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7621	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7623	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7625	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7627	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
R7630	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7632	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7634	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7636	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7638	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7640	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7641	VRS-CY1JD513F	J	51k 1/10W Metal Oxide	AA
R7644	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R7646	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7648	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7650	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7652	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7654	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7656	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
R7658	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7660	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7662	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7664	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7666	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7668	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7670	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7672	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7674	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7676	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7678	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7680	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7682	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
R7684	VRS-CY1JD751J	J	750 1/10W Metal Oxide	AA
MISCELLANEOUS PARTS				
CN7601	QCNCM1848SNEZ	J	Connector, 4-pin	AD
CN7602	QCNCM1821SNEZ	J	Connector, 2-pin	AD
CN7603	QCNCM1821SNEZ	J	Connector, 2-pin	AD
CN7604	QCNCM1821SNEZ	J	Connector, 2-pin	AD
CN7605	QCNCM1821SNEZ	J	Connector, 2-pin	AD
CN7606	QCNCM1821SNEZ	J	Connector, 2-pin	AD
CN7607	QCNCM1821SNEZ	J	Connector, 2-pin	AD
CN7608	QCNCM1821SNEZ	J	Connector, 2-pin	AD
LUG7601	QTAND1019SNEZ	J	Lug	AD
LUG7602	QTAND1019SNEZ	J	Lug	AD
LUG7603	QTAND1019SNEZ	J	Lug	AD

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
RUNTKA096WJZZ (LC-32GA5U)					RESISTOR				
INVERTER-1 UNIT					R7501	RR-RCR16F105J	J	1M 1/4W Metal Oxide	
DIODES					MISCELLANEOUS PARTS				
D7501	VHD1SS270A/-F	J	1SS270A		CN7601	QCNCM1848SNEZ	J	Connector, 4-pin	
D7502	VHD1SS270A/-F	J	1SS270A		CN7501	QCNCM1857SNEZ	J	Connector, 12-pin	
D7503	VHD1SS270A/-F	J	1SS270A		CN7502	QCNCM1857SNEZ	J	Connector, 12-pin	
D7504	VHD1SS270A/-F	J	1SS270A		CN7503	QCNCM1826SNEZ	J	Connector, 2-pin	AE
D7505	VHD1SS270A/-F	J	1SS270A		CN7504	QCNCM1856SNEZ	J	Connector, 2-pin	
D7506	VHD1SS270A/-F	J	1SS270A		CN7505	QCNCM1856SNEZ	J	Connector, 2-pin	
D7507	VHD1SS270A/-F	J	1SS270A		CN7506	QCNCM1856SNEZ	J	Connector, 2-pin	
D7508	VHD1SS270A/-F	J	1SS270A		CN7507	QCNCM1856SNEZ	J	Connector, 2-pin	
D7509	VHD1SS270A/-F	J	1SS270A		LUG7501	QTAND1020SNEZ	J	Lug	
D7510	VHD1SS270A/-F	J	1SS270A		LUG7502	QTAND1020SNEZ	J	Lug	
D7511	VHD1SS270A/-F	J	1SS270A						
D7512	VHD1SS270A/-F	J	1SS270A						
D7513	VHD1SS270A/-F	J	1SS270A						
D7514	VHD1SS270A/-F	J	1SS270A						
D7515	VHD1SS270A/-F	J	1SS270A						
D7516	VHD1SS270A/-F	J	1SS270A						
TRANSFORMERS									
T7501	RTRNZ1278SNEZ	J	Transformer						
T7502	RTRNZ1278SNEZ	J	Transformer						
T7503	RTRNZ1278SNEZ	J	Transformer						
T7504	RTRNZ1278SNEZ	J	Transformer						
T7505	RTRNZ1277SNEZ	J	Transformer						
T7506	RTRNZ1277SNEZ	J	Transformer						
T7507	RTRNZ1277SNEZ	J	Transformer						
T7508	RTRNZ1277SNEZ	J	Transformer						
CAPACITORS									
C7503	RCCC453JD100J	J	10p 6kV Ceramic						
C7508	RCCC453JD100J	J	10p 6kV Ceramic						
C7513	RCCC453JD100J	J	10p 6kV Ceramic						
C7518	RCCC453JD100J	J	10p 6kV Ceramic						
C7523	RCCC453JD100J	J	10p 6kV Ceramic						
C7528	RCCC453JD100J	J	10p 6kV Ceramic						
C7533	RCCC453JD100J	J	10p 6kV Ceramic						
C7538	RCCC453JD100J	J	10p 6kV Ceramic						
C7501	RCFK201E475KN	J	4.7 25V Ceramic						
C7506	RCFK201E475KN	J	4.7 25V Ceramic						
C7511	RCFK201E475KN	J	4.7 25V Ceramic						
C7516	RCFK201E475KN	J	4.7 25V Ceramic						
C7521	RCFK201E475KN	J	4.7 25V Ceramic						
C7526	RCFK201E475KN	J	4.7 25V Ceramic						
C7531	RCFK201E475KN	J	4.7 25V Ceramic						
C7536	RCFK201E475KN	J	4.7 25V Ceramic						
C7502	RCFK242A473KN	J	0.047 100V Ceramic						
C7507	RCFK242A473KN	J	0.047 100V Ceramic						
C7512	RCFK242A473KN	J	0.047 100V Ceramic						
C7517	RCFK242A473KN	J	0.047 100V Ceramic						
C7522	RCFK242A473KN	J	0.047 100V Ceramic						
C7527	RCFK242A473KN	J	0.047 100V Ceramic						
C7532	RCFK242A473KN	J	0.047 100V Ceramic						
C7537	RCFK242A473KN	J	0.047 100V Ceramic						
C7504	RCUP050B103KF	J	0.01 50V Ceramic						
C7509	RCUP050B103KF	J	0.01 50V Ceramic						
C7514	RCUP050B103KF	J	0.01 50V Ceramic						
C7519	RCUP050B103KF	J	0.01 50V Ceramic						
C7524	RCUP050B103KF	J	0.01 50V Ceramic						
C7529	RCUP050B103KF	J	0.01 50V Ceramic						
C7534	RCUP050B103KF	J	0.01 50V Ceramic						
C7539	RCUP050B103KF	J	0.01 50V Ceramic						
C7541	RCUP050B103KF	J	0.01 50V Ceramic						
C7505	RCUP050B822KF	J	8200p 50V Ceramic						
C7510	RCUP050B822KF	J	8200p 50V Ceramic						
C7515	RCUP050B822KF	J	8200p 50V Ceramic						
C7520	RCUP050B822KF	J	8200p 50V Ceramic						
C7525	RCUP050B822KF	J	8200p 50V Ceramic						
C7530	RCUP050B822KF	J	8200p 50V Ceramic						
C7535	RCUP050B822KF	J	8200p 50V Ceramic						
C7540	RCUP050B822KF	J	8200p 50V Ceramic						

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

RUNTKA097WJZZ (LC-32GA5U) INVERTER-2 UNIT

DIODES

D7401	VHD1SS270A/-FA	J	1SS270A
D7402	VHD1SS270A/-FA	J	1SS270A
D7403	VHD1SS270A/-FA	J	1SS270A
D7404	VHD1SS270A/-FA	J	1SS270A
D7405	VHD1SS270A/-FA	J	1SS270A
D7406	VHD1SS270A/-FA	J	1SS270A
D7407	VHD1SS270A/-FA	J	1SS270A
D7408	VHD1SS270A/-FA	J	1SS270A
D7409	VHD1SS270A/-FA	J	1SS270A
D7410	VHD1SS270A/-FA	J	1SS270A
D7411	VHD1SS270A/-FA	J	1SS270A
D7412	VHD1SS270A/-FA	J	1SS270A
D7413	VHD1SS270A/-FA	J	1SS270A
D7414	VHD1SS270A/-FA	J	1SS270A
D7415	VHD1SS270A/-FA	J	1SS270A
D7416	VHD1SS270A/-FA	J	1SS270A

TRANSFORMERS

T7401	RTRNZ1277SNEZ	J	Transformer
T7402	RTRNZ1277SNEZ	J	Transformer
T7403	RTRNZ1277SNEZ	J	Transformer
T7404	RTRNZ1277SNEZ	J	Transformer
T7405	RTRNZ1278SNEZ	J	Transformer
T7406	RTRNZ1278SNEZ	J	Transformer
T7407	RTRNZ1278SNEZ	J	Transformer
T7408	RTRNZ1278SNEZ	J	Transformer

CAPACITORS

C7401	RCFK201E475KNT	J	4.7	25V	Ceramic
C7402	RCFK242A473KNT	J	0.047	100V	Ceramic
C7403	RCCC453JD100JT	J	10p	6kV	Ceramic
C7404	RCUP050B103KFA	J	0.01	50V	Ceramic
C7405	RCUP050B822KFA	J	8200p	50V	Ceramic
C7406	RCFK201E475KNT	J	4.7	25V	Ceramic
C7407	RCFK242A473KNT	J	0.047	100V	Ceramic
C7408	RCCC453JD100JT	J	10p	6kV	Ceramic
C7409	RCUP050B103KFA	J	0.01	50V	Ceramic
C7410	RCUP050B822KFA	J	8200p	50V	Ceramic
C7411	RCFK201E475KNT	J	4.7	25V	Ceramic
C7412	RCFK242A473KNT	J	0.047	100V	Ceramic
C7413	RCCC453JD100JT	J	10p	6kV	Ceramic
C7414	RCUP050B103KFA	J	0.01	50V	Ceramic
C7415	RCUP050B822KFA	J	8200p	50V	Ceramic
C7416	RCFK201E475KNT	J	4.7	25V	Ceramic
C7417	RCFK242A473KNT	J	0.047	100V	Ceramic
C7418	RCCC453JD100JT	J	10p	6kV	Ceramic
C7419	RCUP050B103KFA	J	0.01	50V	Ceramic
C7420	RCUP050B822KFA	J	8200p	50V	Ceramic
C7421	RCFK201E475KNT	J	4.7	25V	Ceramic
C7422	RCFK242A473KNT	J	0.047	100V	Ceramic
C7423	RCCC453JD100JT	J	10p	6kV	Ceramic
C7424	RCUP050B103KFA	J	0.01	50V	Ceramic
C7425	RCUP050B822KFA	J	8200p	50V	Ceramic
C7426	RCFK201E475KNT	J	4.7	25V	Ceramic
C7427	RCFK242A473KNT	J	0.047	100V	Ceramic
C7428	RCCC453JD100JT	J	10p	6kV	Ceramic
C7429	RCUP050B103KFA	J	0.01	50V	Ceramic
C7430	RCUP050B822KFA	J	8200p	50V	Ceramic
C7431	RCFK201E475KNT	J	4.7	25V	Ceramic
C7432	RCFK242A473KNT	J	0.047	100V	Ceramic
C7433	RCCC453JD100JT	J	10p	6kV	Ceramic
C7434	RCUP050B103KFA	J	0.01	50V	Ceramic
C7435	RCUP050B822KFA	J	8200p	50V	Ceramic
C7436	RCFK201E475KNT	J	4.7	25V	Ceramic
C7437	RCFK242A473KNT	J	0.047	100V	Ceramic
C7438	RCCC453JD100JT	J	10p	6kV	Ceramic
C7439	RCUP050B103KFA	J	0.01	50V	Ceramic
C7440	RCUP050B822KFA	J	8200p	50V	Ceramic

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

MISCELLANEOUS PARTS

CN7401	QCNCM1857SNEZ	J	Connector, 12-pin
CN7402	QCNCM1856SNEZ	J	Connector, 2-pin
CN7403	QCNCM1856SNEZ	J	Connector, 2-pin
CN7404	QCNCM1856SNEZ	J	Connector, 2-pin
CN7405	QCNCM1856SNEZ	J	Connector, 2-pin
LUG7401	QTAND1020SNEZT	J	Lug
LUG7402	QTAND1020SNEZT	J	Lug

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
RUNTKA098WJZZ (LC-32GA5U)									
INVERTER-GND UNIT									
TRANSISTORS									
Q7601	VSUM6K1N///-1	J	UM6K1N	AD	R7636	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
Q7602	VSUM6K1N///-1	J	UM6K1N	AD	R7637	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
Q7603	VSUM6K1N///-1	J	UM6K1N	AD	R7639	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
Q7604	VSUM6K1N///-1	J	UM6K1N	AD	R7642	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
Q7605	VSUM6K1N///-1	J	UM6K1N	AD	R7643	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
Q7606	VSUM6K1N///-1	J	UM6K1N	AD	R7645	VRS-CY1JD182F	J	1.8k 1/10W Metal Oxide	
Q7607	VSUM6K1N///-1	J	UM6K1N	AD	R7646	VRS-CY1JD242F	J	2.4k 1/10W Metal Oxide	AA
Q7609	VSUM6K1N///-1	J	UM6K1N	AD	R7647	VRS-CY1JD513J	J	51k 1/10W Metal Oxide	AA
Q7610	VSUM6K1N///-1	J	UM6K1N	AD	R7649	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
Q7611	VSUM6K1N///-1	J	UM6K1N	AD	R7651	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
Q7612	VSUM6K1N///-1	J	UM6K1N	AD	R7654	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
Q7613	VSUM6K1N///-1	J	UM6K1N	AD	R7655	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
Q7614	VSUM6K1N///-1	J	UM6K1N	AD	R7657	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
Q7615	VSUM6K1N///-1	J	UM6K1N	AD	R7660	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
Q7616	VSUM6K1N///-1	J	UM6K1N	AD	R7661	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
DIODES					R7663	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
D7601	VHD1SS355// -1	J	Diode	AB	R7666	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
D7602	VHD1SS355// -1	J	Diode	AB	R7667	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
D7603	VHD1SS355// -1	J	Diode	AB	R7669	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
D7604	VHD1SS355// -1	J	Diode	AB	R7672	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
D7605	VHD1SS355// -1	J	Diode	AB	R7673	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
D7606	VHD1SS355// -1	J	Diode	AB	R7675	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
D7607	VHD1SS355// -1	J	Diode	AB	R7678	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
D7609	VHD1SS355// -1	J	Diode	AB	R7679	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
D7610	VHD1SS355// -1	J	Diode	AB	R7681	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
D7611	VHD1SS355// -1	J	Diode	AB	R7684	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
D7612	VHD1SS355// -1	J	Diode	AB	R7685	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
D7613	VHD1SS355// -1	J	Diode	AB	R7687	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
D7614	VHD1SS355// -1	J	Diode	AB	R7690	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
D7615	VHD1SS355// -1	J	Diode	AB	R7691	VRS-CY1JD751J	J	750 1/10W Metal Oxide	
D7616	VHD1SS355// -1	J	Diode	AB	R7693	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA
D7624	VHDDAN217U/-1	J	Diode	AC	R7696	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA
TH7607	VHH18XH103J03	J	Thermistor	AC	MISCELLANEOUS PARTS				
CAPACITORS					CN7601	QCNCM1855SNEZ	J	Connector, 12-pin	
C7601	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7602	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7602	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7603	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7603	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7604	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7604	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7605	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7605	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7606	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7606	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7607	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7607	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7608	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7609	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	CN7609	QCNCM1821SNEZ	J	Connector, 2-pin	AD
C7610	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	LUG7601	QTAND1019SNEZ	J	Lug	AD
C7611	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	LUG7602	QTAND1019SNEZ	J	Lug	AD
C7612	VCKYCY1CB224K	J	0.22 16V Ceramic	AB	LUG7606	QTAND1019SNEZ	J	Lug	AD
C7613	VCKYCY1CB224K	J	0.22 16V Ceramic	AB					
C7614	VCKYCY1CB224K	J	0.22 16V Ceramic	AB					
C7615	VCKYCY1CB224K	J	0.22 16V Ceramic	AB					
C7616	VCKYCY1CB224K	J	0.22 16V Ceramic	AB					
RESISTORS									
R7601	VRS-CY1JD751J	J	750 1/10W Metal Oxide						
R7603	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA					
R7606	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA					
R7607	VRS-CY1JD751J	J	750 1/10W Metal Oxide						
R7609	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA					
R7612	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA					
R7613	VRS-CY1JD751J	J	750 1/10W Metal Oxide						
R7615	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA					
R7618	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA					
R7619	VRS-CY1JD751J	J	750 1/10W Metal Oxide						
R7621	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA					
R7624	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA					
R7625	VRS-CY1JD751J	J	750 1/10W Metal Oxide						
R7627	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA					
R7630	VRS-TP2BD104J	J	100k 1/4W Metal Oxide	AA					
R7631	VRS-CY1JD751J	J	750 1/10W Metal Oxide						
R7633	VRS-CY1JD155J	J	1.5M 1/10W Metal Oxide	AA					

CABINET AND MECHANICAL PARTS (LC-26GA5U)

H

G

F


E

D

C

B

A

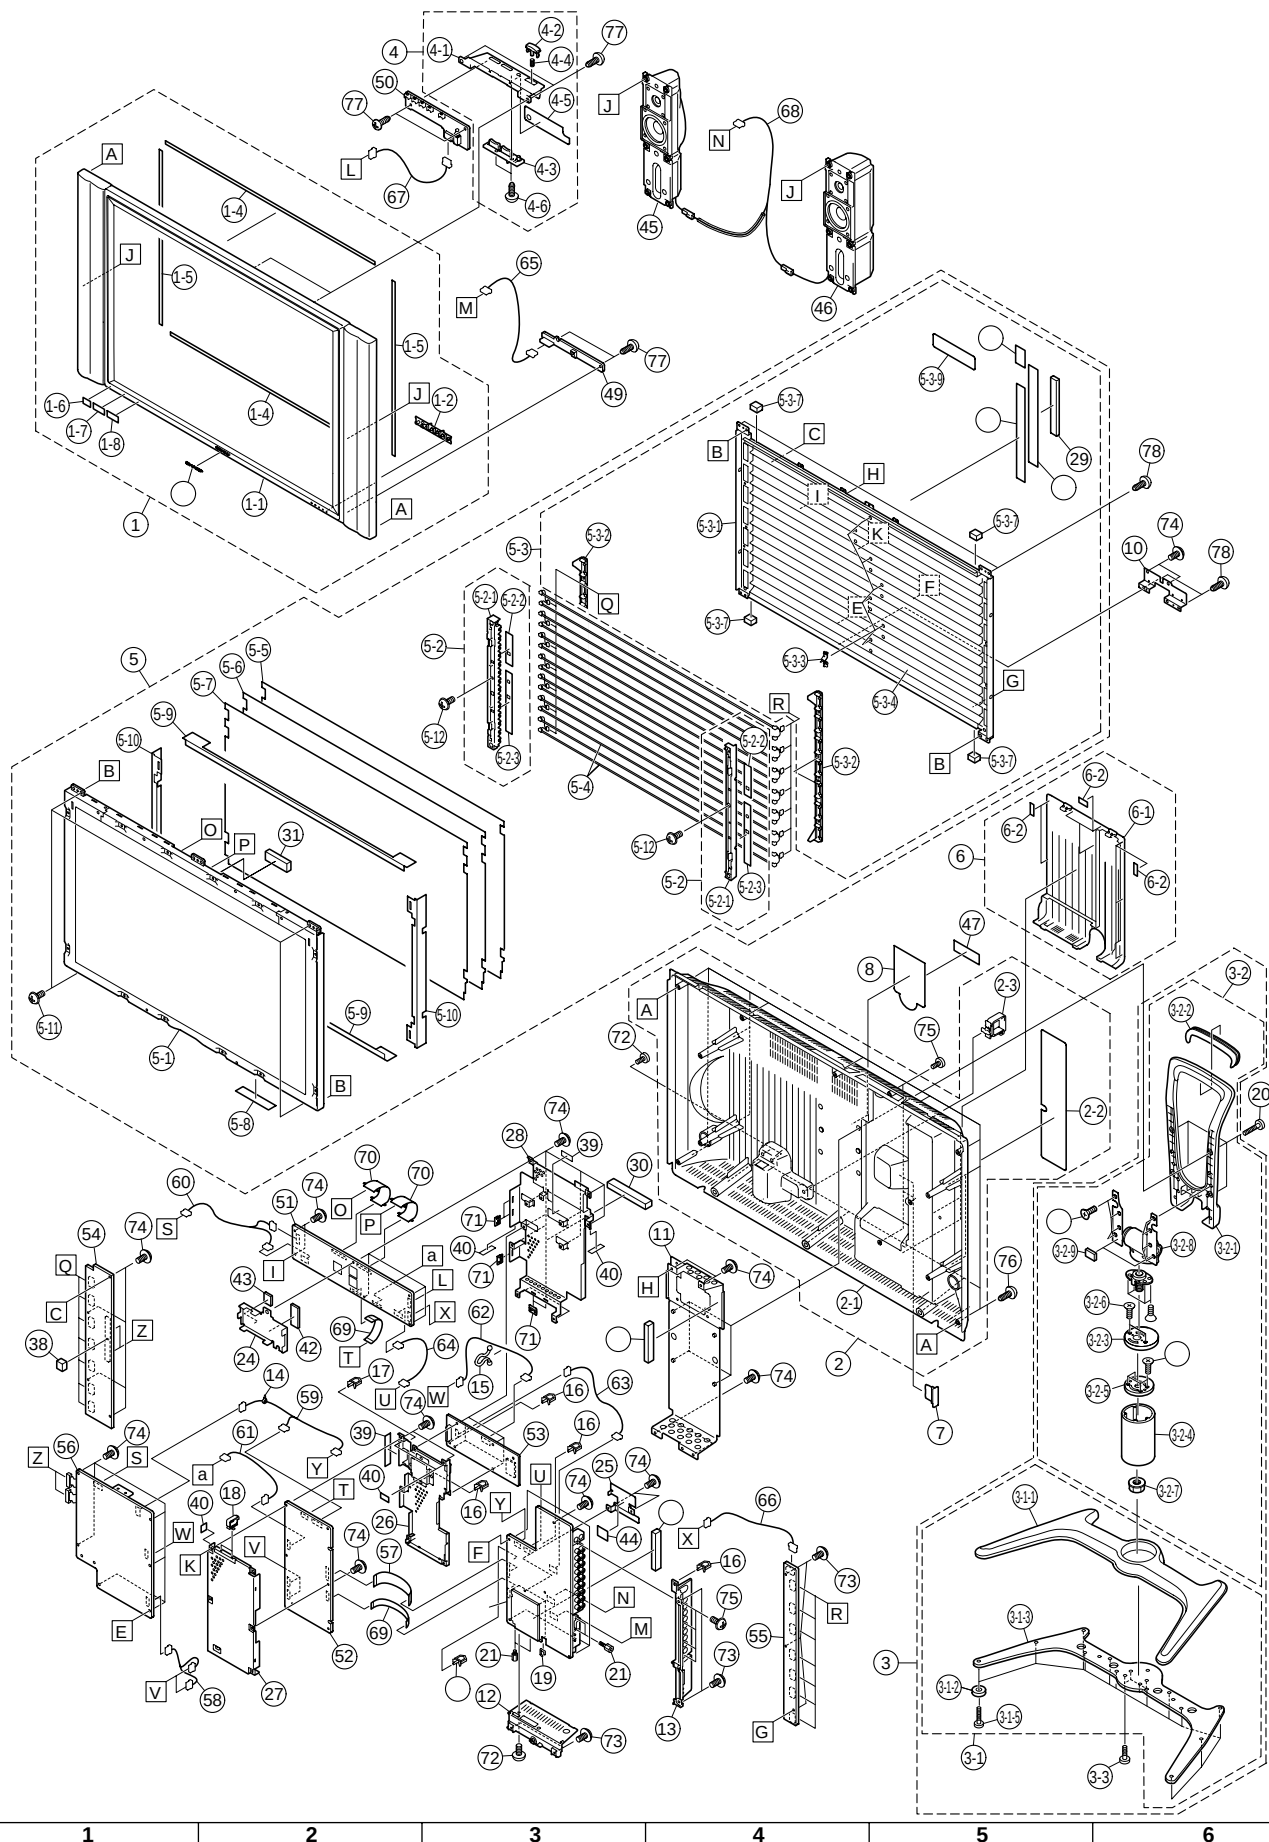

1

2

3


4

5

6

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
CABINET AND MECHANICAL PARTS					6-1	GCOVAA982WJKA	J	Terminal Cover	
					6-2	PSPAHA413WJZZ	J	Spacer, x8	AB
1	CCABAA711WJ01	J	Cabinet A Ass'y	—	7	GCOVAA678WJKB	J	SD Card Cover	
1-1	Not Available	—	Cabinet A		8	HiNDPB139WJSA	J	Model Label	
1-2	HDECQA346WJSA	J	RC/LED Decoration Cover	AE	9	LANGHA011WJFW	J	Fixing Metal, x2	
1-3	PCOVUA056WJZZ	J	RC/LED Cover		10	LANGKA259WJFW	J	Reinforcement Angle	AG
1-4	PSPAHA323WJZZ	J	Mask Spacer, x2	AD	11	LANGTA146WJFW	J	Reinforcement Angle	
1-5	PSPAHA324WJZZ	J	Mask Spacer, x2	AC	12	LCHSMA149WJKA	J	Chassis Frame	
1-6	TLABZA635WJZZ	J	"Energy Star" Label	AC	13	LCHSMA150WJKA	J	Chassis Frame	
1-7	TLABZA676WJZZ	J	"POP" Label	AC	14	LHLDW1033PEZZ	J	Wire Holder, x1	AA
1-8	TLABZA825WJZZ	J	"HDMI" Label		15	LHLDW1060CEZZ	J	Wire Holder, x2	AB
					16	LHLDWA048WJKZ	J	Wire Holder, x4	AB
2	CCABBA459WJ01	J	Cabinet B Ass'y		17	LHLDWA075WJKZ	J	Wire Holder, x1	
2-1	Not Available	—	Cabinet B		18	LHLDWA079WJKZ	J	Wire Holder, x2	
2-2	HiNDPB138WJSA	J	Terminal Label		19	LHLDWA080WJKZ	J	Wire Holder, x1	
2-3	LHLDWA055WJKZ	J	Wire Holder, x1	AC	20	LX-BZ3442CEF9	J	Screw, x4	AB
3	Not Available	—	Stand Ass'y		21	NSFTZ0134CEFW	J	Shaft Screw, x4	AD
3-1	CDAl-A146WJ01	J	Stand Base Ass'y		22	PFLT-A044WJZZ	J	Conductive Spacer, x1	
3-1-1	GDAI-A146WJKA	J	Stand Base		23	PFLT-A045WJZZ	J	Conductive Spacer, x1	
3-1-2	GLEGPA028WJZZ	J	Rubber Leg, x7	AC	24	PRDARA170WJFW	J	Heat Sink, x1	
3-1-3	LANGKA234WJSA	J	Base Angle	BD	25	PRDARA179WJFW	J	Heat Sink, x1	
3-1-4	XEBS940P12000	J	Screw, x2	AB	26	PSLDMA497WJFW	J	Shield Spacer, x1	
3-1-5	XEBS940P14000	J	Screw, x11	AB	27	PSLDMA498WJFW	J	Shield Spacer, x1	
3-2	CHNDPA014WJ01	J	Stand Handle Ass'y		28	PSLDMA570WJFW	J	Shield Spacer, x1	
3-2-1	JHNDPA014WJKA	J	Stand Handle		29	PSLDMA579WJZZ	J	Shield Spacer, x1	
3-2-2	GCOVAA713WJSA	J	Handle Grip	AH	30	PSLDMA581WJZZ	J	Shield Spacer, x1	
3-2-3	GCOVAB019WJKA	J	Swivel Cover		31	PSLDMA584WJZZ	J	Shield Spacer, x1	
3-2-4	GDAI-A152WJSA	J	Stand Support		32	PSLDMA609WJZZ	J	Shield Spacer, x1	
3-2-5	LANGKA363WJF7	J	Swivel Base		33	PSLDMA615WJZZ	J	Shield Spacer, x1	
3-2-6	LX-BZA019WJFN	J	Screw, x2	AB	34	PSLDMA634WJZZ	J	Shield Spacer, x1	
3-2-7	LX-NZA001WJFN	J	Nut, x1	AD	35	PSLDMA635WJZZ	J	Shield Spacer, x1	
3-2-8	MHNG-A083WJ01	J	Swivel Hinge		36	PSLDMA636WJZZ	J	Shield Spacer, x1	
3-2-9	PSPAZA083WJZZ	J	Spacer, x2	AB	37	PSLDMA637WJZZ	J	Shield Spacer, x1	
3-2-10	XCSSN50P25000	J	Screw, x4	AB	38	PSPAGA243WJZZ	J	Shield Spacer, x1	
3-2-11	XUSSN40P25000	J	Screw, x4		39	PSPAHA467WJZZ	J	Spacer, x2	
3-3	XCBS950P25000	J	Screw, x1	AC	40	PSPAHA468WJZZ	J	Spacer, x4	
4	CCOVAA873WJ03	J	Top Cover Ass'y		41	PSPAHA478WJZZ	J	Spacer, x1	
4-1	Not Available	—	Top Cover		42	PSPAZA567WJKZ	J	Spacer, x1	
4-2	JBTN-A254WJKB	J	Power Button	AG	43	PSPAZA568WJKZ	J	Spacer, x1	
4-3	JBTN-A259WJKB	J	Operation Button	AH	44	PSPAZA586WJKZ	J	Spacer, x1	
4-4	MSPRCA015WJFW	J	Spring, for Power Button	AB	45	RSP-ZA088WJZZ	J	Speaker Box(L)	BA
4-5	PZETKA115WJZZ	J	Spacer, x1		46	RSP-ZA089WJZZ	J	Speaker Box(R)	BA
4-6	XEBSN30P08000	J	Screw, x2	AA	47	Not Available	—	Serial No. Label	
5	Not Available	—	26" LCD Panel Unit Ass'y		48	DUNT KC790WEV2		AV Unit	
5-1	RLCDA039WJZZ	J	26" LCD Panel Unit		49	DUNT KC791WEV0		R/C, LED Unit	
5-2	Not Available	—	Lamp Holder(Top), x2		50	DUNT KC792WEV0		KEY Unit	
5-2-1	LHLDZA443WJKZ	J	Lamp Holder, x1		51	DUNT KC793FE21		LCD CONTROL Unit	
5-2-2	PSPA KA053WJZZ	J	Cover-A, x1		52	DUNT KC794FE01		MAIN Unit	
5-2-3	PSPA KA054WJZZ	J	Cover-B, x1		53	DUNT KC796FE11		CPU Unit	
5-3	Not Available	—	Back Shield Ass'y		54	RUNT KA094WJZZ		INVERTER Unit	BK
5-3-1	PSLDMA496WJFW	J	Back Shield		55	RUNT KA095WJZZ		INVERTER-GND Unit	AW
5-3-2	LHLDZA444WJKZ	J	Lamp Holder(Bottom), x2	AK	56	RDENCA092WJZZ		POWER Unit	
5-3-3	LHLDZA445WJKZ	J	Lamp Clip, x7	AB	57	QCNW-B381WJQZ	J	Connecting Cord	AD
5-3-4	PMiR-A054WJZZ	J	Reflection Mirror		58	QCNW-C817WJQZ	J	Connecting Cord	
5-3-5	PSPAHA465WJZZ	J	Spacer, x2		59	QCNW-C818WJQZ	J	Connecting Cord	
5-3-6	PSPA KA057WJZZ	J	Light Shielding Spacer, x2		60	QCNW-C819WJQZ	J	Connecting Cord	
5-3-7	PSPA ZA486WJZZ	J	Spacer, x4		61	QCNW-C820WJQZ	J	Connecting Cord	
5-3-8	PSPA ZA561WJZZ	J	Spacer, x3	AA	62	QCNW-C821WJQZ	J	Connecting Cord	
5-3-9	TCAUZA031WJZZ	J	Caution Label	AB	63	QCNW-C822WJQZ	J	Connecting Cord	
5-4	KLMP-A042WJZZ	J	Lamp, x7	AZ	64	QCNW-C823WJQZ	J	Connecting Cord	
5-5	PCOVUA026WJZZ	J	Diffusion Panel	BA	65	QCNW-C824WJQZ	J	Connecting Cord	
5-6	PSHEPA166WJZZ	J	Diffusion Sheet	AS	66	QCNW-C826WJQZ	J	Connecting Cord	
5-7	PSHEPA236WJZZ	J	Reflection/deflection Sheet	BS	67	QCNW-C827WJQZ	J	Connecting Cord	
5-8	PSPA HA466WJZZ	J	Spacer, x1		68	QCNW-C828WJQZ	J	Connecting Cord	
5-9	PSPA ZA535WJZZ	J	Spacer, x2	AM	69	QCNW-C831WJQZ	J	Connecting Cord, x2	
5-10	PSPA ZA536WJZZ	J	Spacer, x2	AH	70	QPWBMC494WJPZ	J	Connecting Cord, x2	AM
5-11	XBBS740P08000	J	Screw, x4		71	QEARZA020WJFW	J	Earth Plate, x3	AC
5-12	XBPS730P08JSO	J	Screw, x2	AB	72	XBBS930P06000	J	Screw, x3	AA
6	CCOVAA982WJ01	J	Terminal Cover Ass'y		73	XBPS730P04WSO	J	Screw, x7	
					74	XBPS730P08WSO	J	Screw, x38	
					75	XEBS930P08000	J	Screw, x9	AA
					76	XEBS940P16000	J	Screw, x14	AB
					77	XEBSN30P08000	J	Screw, x6	AA
					78	XEBSN40P10000	J	Screw, x4	AB

CABINET AND MECHANICAL PARTS (LC-32GA5U)

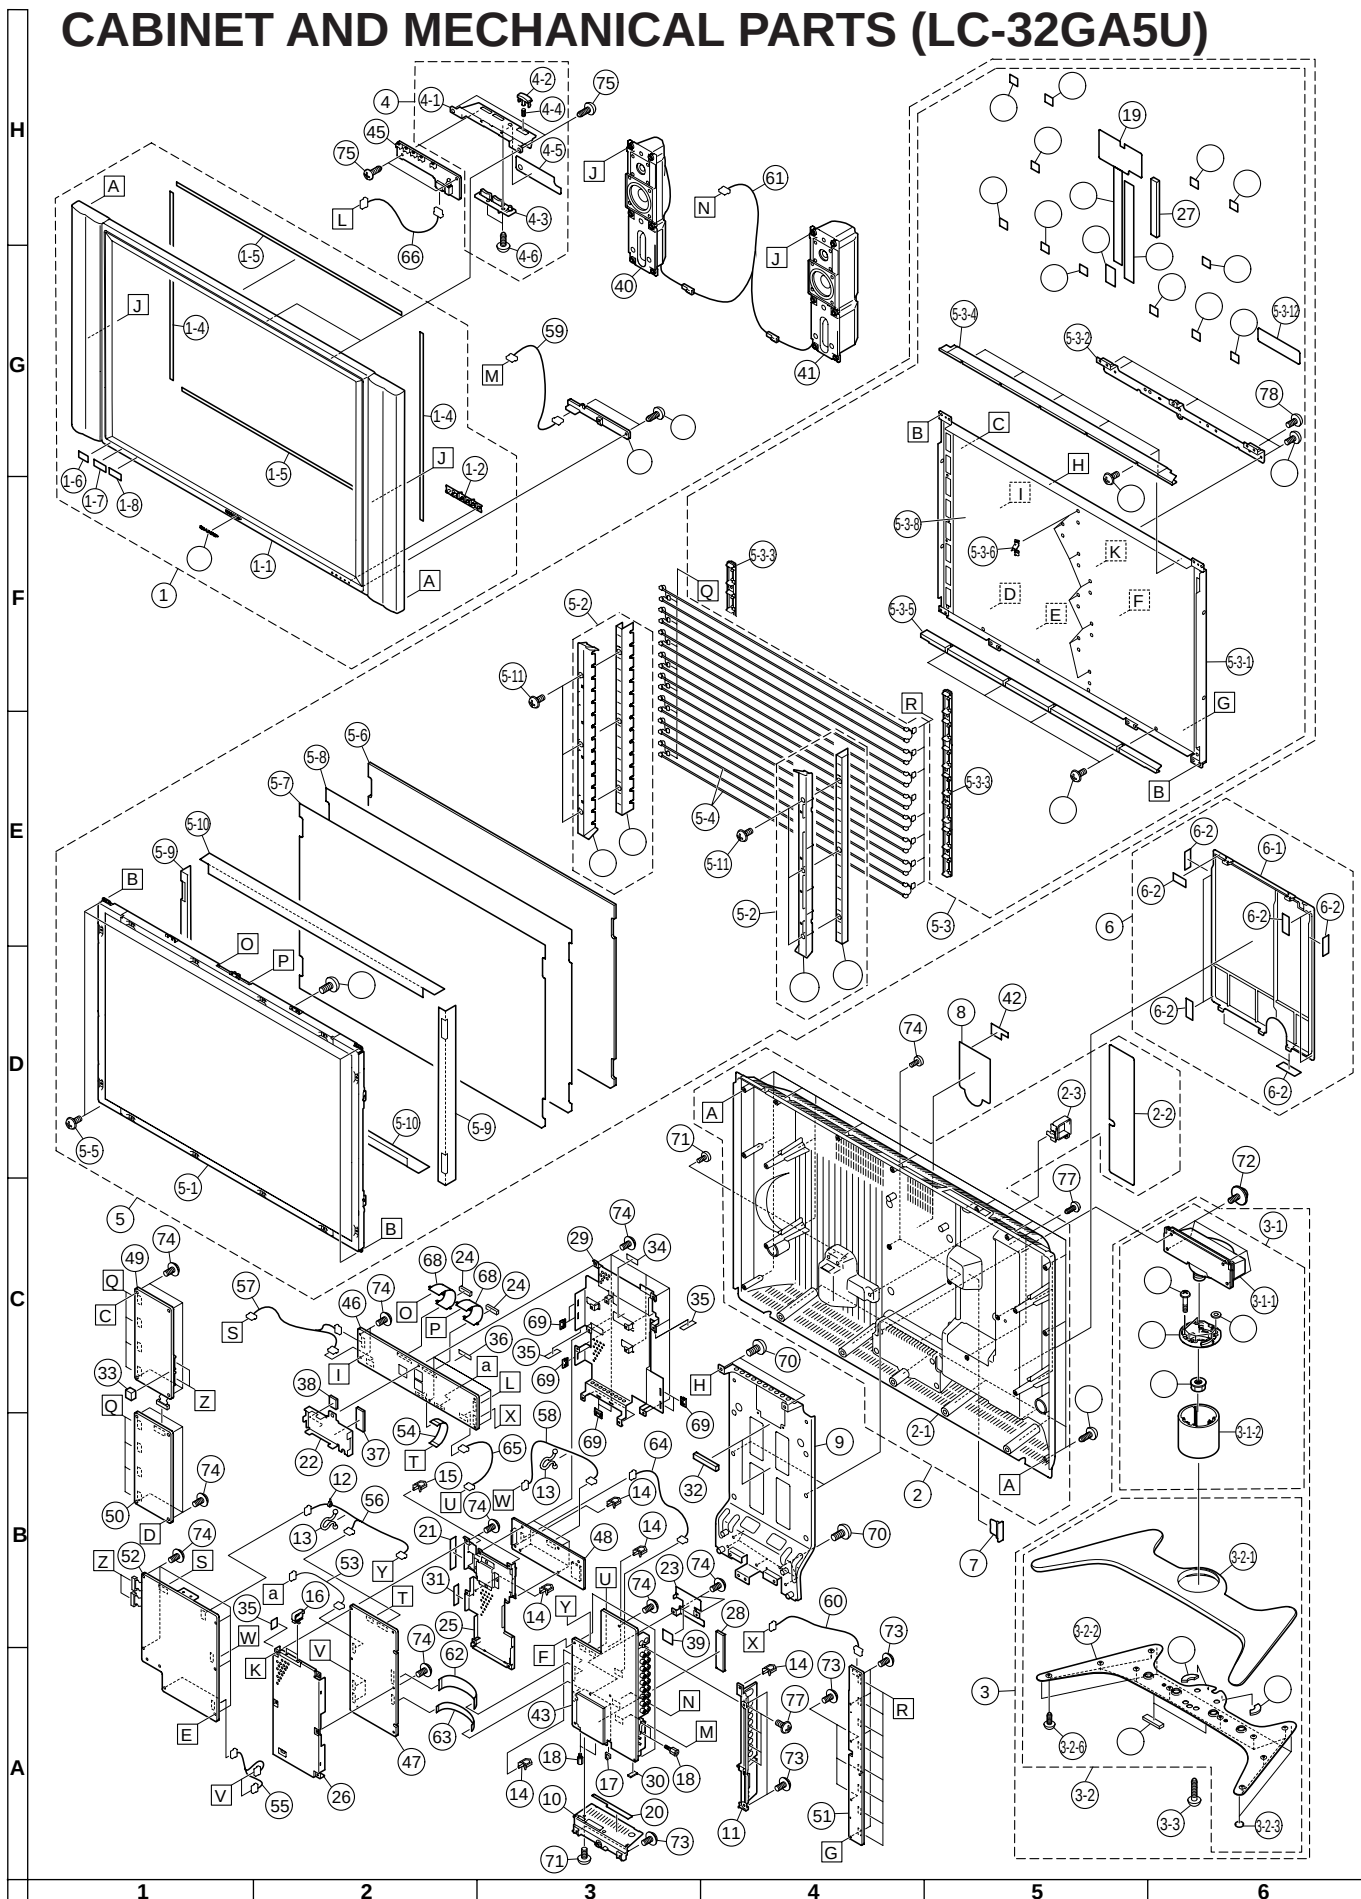

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
CABINET AND MECHANICAL PARTS (LC-32GA5U)					5-11	XBBSN30P08000	J	Screw, x6	AA
1	CCABAA714WJ01	J	Cabinet A Ass'y		6	CCOVAA993WJ01	J	Terminal Cover Ass'y	
1-1	Not Available	—	Cabinet A	—	6-1	GCOVAA993WJKA	J	Terminal Cover	
1-2	HDECQA346WJSA	J	R/C-LED Cover	AE	6-2	PSPAHA413WJZZ	J	Spacer, x8	AB
1-3	PCOVUA056WJZZ	J	R/C-LED Shading Cover		7	GCOVAA678WJKB	J	SD Card Cover	
1-4	PSPAHA298WJZZ	J	Mask Spacer, x2	AC	8	HINDPB142WJSA	J	Model Label	
1-5	PSPAHA407WJZZ	J	Mask Spacer, x2	AD	9	LANGTA149WJZZ	J	Reinforcement Angle	
1-6	TLABZA635WJZZ	J	"Energy Star" Label	AC	10	LCHSMA149WJKA	J	Chassis Frame	
1-7	TLABZA676WJZZ	J	"POP" Label	AC	11	LCHSMA150WJKA	J	Chassis Frame	
1-8	TLABZA825WJZZ	J	"HDMI" Label		12	LHLDW1033PEZZ	J	Wire Holder, x1	AA
					13	LHLDW1060CEZZ	J	Wire Holder, x2	AB
2	CCABBA460WJ01	J	Cabinet B Ass'y		14	LHLDWA048WJKZ	J	Wire Holder, x4	AB
2-1	Not Available	—	Cabinet B	—	15	LHLDWA075WJKZ	J	Wire Holder, x1	
2-2	HINDPB138WJSA	J	Terminal Indication Label		16	LHLDWA079WJKZ	J	Wire Holder, x2	
2-3	LHLDWA055WJKZ	J	Wire Holder, x1	AC	17	LHLDWA080WJKZ	J	Wire Holder, x1	
3	Not Available	—	Stand Ass'y	—	18	NSFTZ0134CEFW	J	Shaft Screw, x4	AD
3-1	CCOVAB012WJ01	J	Stand Hinge Ass'y		19	PFLT-A044WJZZ	J	Conductive Sheet, x1	
3-1-1	GCOVAB012WJKA	J	Stand Hinge		20	PFLT-A045WJZZ	J	Conductive Sheet, x1	
3-1-2	GDAI-A148WJSA	J	Stand Support		21	PFLT-A047WJZZ	J	Conductive Sheet, x1	
3-1-3	GDAI-A160WJF7	J	Support Cover		22	PRDARA170WJFW	J	Heat Sink	
3-1-4	LANGTA156WJSA	J	Stand Bracket		23	PRDARA179WJFW	J	Heat Sink	
3-1-5	LX-BZA046WJFN	J	Screw, x2	AA	24	PSLDMA477WJZZ	J	Gasket Shield, x2	
3-1-6	LX-BZA091WJF7	J	Screw, x4		25	PSLDMA497WJFW	J	MAIN PWB Shield(Top)	
3-1-7	XCSS940P25000	J	Screw, x5	AB	26	PSLDMA498WJFW	J	MAIN PWB Shield(Bottom)	
3-2	CDAI-A147WJ01	J	Stand Base Ass'y		27	PSLDMA579WJZZ	J	Gasket Shield, x1	
3-2-1	GDAI-A147WJKA	J	Stand Base		28	PSLDMA582WJZZ	J	Gasket Shield, x1	
3-2-2	LANGKA282WJSA	J	Base Angle	BF	29	PSLDMA597WJFW	J	Shield Case	
3-2-3	PSPAZA476WJZZ	J	Leg Spacer-A, x4	AC	30	PSLDMA609WJZZ	J	Gasket Shield	
3-2-4	PSPAZA477WJZZ	J	Leg Spacer-B, x2	AD	31	PSLDMA615WJZZ	J	Conductive Shield	
3-2-5	PSPAZA530WJZZ	J	Leg Spacer-C, x2	AD	32	PSLDMA619WJZZ	J	Gasket Shield, x2	
3-2-6	XEBS940P10000	J	Screw, x10	AB	33	PSPAGA243WJZZ	J	Spacer, x2	
3-3	XCBS940P25000	J	Screw, x5	AB	34	PSPAHA467WJZZ	J	Spacer, x1	
4	CCOVAA873WJ03	J	Top Cover Ass'y		35	PSPAHA468WJZZ	J	MAIN PWB Spacer, x2	
4-1	Not Available	—	Top Cover	—	36	PSPAHA478WJZZ	J	MAIN PWB Spacer, x4	
4-2	JBTN-A254WJKB	J	Power Button	AG	37	PSPAZA567WJKZ	J	Spacer, x1	
4-3	JBTN-A259WJKB	J	Operation Button	AH	38	PSPAZA568WJKZ	J	Spacer, x1	
4-4	MSPRCA015WJFW	J	Spring, for Power Button	AB	39	PSPAZA586WJKZ	J	Spacer, x1	
4-5	PZETKA115WJZZ	J	Spacer, x1		40	RSP-ZA088WJZZ	J	Speaker Box(L)	BA
4-6	XEBSN30P08000	J	Screw, x2	AA	41	RSP-ZA089WJZZ	J	Speaker Box(R)	BA
5	Not Available	—	32" LCD Panel Unit Ass'y	—	42	Not Available	—	Serial No. Label	—
5-1	RLCDA037WJZZ	J	32" LCD Panel Unit		43	DUNT KC790WEV2	—	AV Unit	—
5-2	CHLDZA446WJ01	J	Lamp Holder(Top) Ass'y, x2		44	DUNT KC791WEV0	—	R/C, LED Unit	—
5-2-1	LHLDZA446WJKZ	J	Lamp Holder(Top)		45	DUNT KC792WEV0	—	KEY Unit	—
5-2-2	PSPAGA251WJZZ	J	Spacer, x4		46	DUNT KC793FE22	—	LCD CONTROL Unit	—
5-2-3	PSPAKA064WJZZ	J	Spacer, x1		47	DUNT KC794FE01	—	MAIN Unit	—
5-3	Not Available	—	Back Shield Ass'y	—	48	DUNT KC796FE12	—	CPU Unit	—
5-3-1	PSLDMA505WJZZ	J	Back Shield		49	RUNT KA096WJZZ	—	INVERTER-1 Unit	—
5-3-2	LANGKA395WJFW	J	Fixing Angle		50	RUNT KA097WJZZ	—	INVERTER-2 Unit	—
5-3-3	LHLDZA309WJK0	J	Lamp Holder(Bottom), x2	AL	51	RUNT KA098WJZZ	—	INVERTER-GND Unit	—
5-3-4	LHLDZA476WJKZ	J	Reflection Mirror Fixing Holder(Top)		52	RDENCA093WJZZ	—	POWER Unit	—
5-3-5	LHLDZA477WJKZ	J	Reflection Mirror Fixing Holder(Bottom)		53	QCNW-C820WJQZ	J	Connecting Cord(SH)	
5-3-6	LHLDZA483WJKZ	J	Lamp Clip, x8		54	QCNW-C831WJQZ	J	Connecting Cord(LV)	
5-3-7	LX-BZA046WJFN	J	Screw, x7	AA	55	QCNW-C882WJQZ	J	Connecting Cord (PE-PD/PE)	
5-3-8	PMIR-A057WJZZ	J	Reflection Mirror		56	QCNW-C883WJQZ	J	Connecting Cord (PA-PA/PB/ST)	
5-3-9	PSPAHA338WJZZ	J	Spacer, x2		57	QCNW-C884WJQZ	J	Connecting Cord (PO-PO/BL)	
5-3-10	PSPAHA339WJZZ	J	Spacer, x2		58	QCNW-C885WJQZ	J	Connecting Cord(DP)	
5-3-11	PSPAHA340WJZZ	J	Spacer, x12		59	QCNW-C886WJQZ	J	Connecting Cord(RA)	
5-3-12	TCAUZA031WJZZ	J	Caution Label	AB	60	QCNW-C888WJQZ	J	Connecting Cord(GV)	
5-3-13	TLABNA922WJZZ	J	No. Label		61	QCNW-C889WJQZ	J	Connecting Cord(SP)	
5-3-14	XBBSN30P08000	J	Screw, x9	AA	62	QCNW-C890WJQZ	J	Connecting Cord	
5-4	KLMP-A050WJZZ	J	Fluorescent Lamp, x8		63	QCNW-C891WJQZ	J	Connecting Cord	
5-5	LX-BZA051WJFN	J	Screw, x4	AB	64	QCNW-C944WJQZ	J	Connecting Cord(DU)	
5-6	PCOVUA052WJZZ	J	Diffusion Panel		65	QCNW-C945WJQZ	J	Connecting Cord(RM)	
5-7	PSHEPA244WJZZ	J	Reflection/deflection Sheet		66	QCNW-C946WJQZ	J	Connecting Cord(KM)	
5-8	PSHEPA256WJZZ	J	Diffusion Sheet		67	QCNW-D364WJQZ	J	Connecting Cord	
5-9	PSPAKA088WJZZ	J	Spacer, x2		68	QPWBMC494WJPZ	J	Connecting Cord	AM
5-10	PSPAKA089WJZZ	J	Spacer, x2		69	QEARZA020WJFW	J	Grounding Spring, x7	AC
					70	XBBS740P06000	J	Screw, x7	AA
					71	XBBS930P06000	J	Screw, x5	AA
					72	XBBSN50P12JS0	J	Screw, x4	AF

Ref. No.	Part No.	★	Description	Code
CABINET AND MECHANICAL PARTS (LC-32GA5U) (Continued)				

73	XBPS730P04WS0	J	Screw, x10	
74	XBPS730P08WS0	J	Screw, x36	
75	XEBNS30P08000	J	Screw, x7	AA
76	XEBS940P16000	J	Screw, x19	AB
77	XEBS930P08000	J	Screw, x6	AA
78	XEBSN40P10000	J	Screw, x1	AB

SUPPLIED ACCESSORIES

	LHLDW0110CEZZ	J	Cable Clamp, x1	AE
	LHLDWA083WJ00	J	Cable Tie, x1	
⚠	QACDDA019WJPZ	J	AC Cord	AW
	RRMCGA331WJSA	J	Remote Control Unit	
	TCADAE126WJZZ	J	Questionnaire Card	
	TiNS-B523WJN1	J	Operation Manual	

Ref. No.	Part No.	★	Description	Code
SERVICE JIGS (EXTENSION CABLE)				

QCNW-C222WJQZ	J	Extension Cable, 80-pin LCD CTL-LCD Panel	
QCNW-C492WJQZ	J	Extension Cable, 33-pin MAIN-LCD CTL, MAIN-AV	
QCNW-C968WJQZ	J	Extension Cable, 50-pin MAIN-AV	
QCNW-C969WJQZ	J	Extension Cable, 16-pin MAIN(PE/PD)-POW(PE)	
QCNW-C970WJQZ	J	Extension Cable, AV(PA)/MAIN(PB)-POW(PA)/ LCD CTL(ST)	
QCNW-C971WJQZ	J	Extension Cable, LCD CTL(PO/BL)-POW(PO)	
QCNW-C972WJQZ	J	Extension Cable, 14-pin MAIN(SH)-LCD CTL(SH)	
QCNW-C973WJQZ	J	Extension Cable, 9-pin CPU(DP)-POW(DP)	
QCNW-C974WJQZ	J	Extension Cable, 5-pin CPU(DU)-AV(DU)	
QCNW-C975WJQZ	J	Extension Cable, 9-pin AV(RM)-LCD CTL(RM)	
QCNW-C976WJQZ	J	Extension Cable, 8-pin AV(RA)-R/C, LED(RA)	
QCNW-C977WJQZ	J	Extension Cable, LCD CTL(GV)-INV GND(GV)	
QCNW-C979WJQZ	J	Extension Cable, 5-pin LCD CTL(KM)-KEY(KM)	
RUNTKA125WJZZ	J	Extension Cable, MAIN-CPU	

PACKING PARTS (NOT REPLACEMENT ITEM)


LC-26GA5U

SPAKCB644WJZZ	—	Packing Case	—
SPAKFA634WJZZ	—	Packing Case, for Accessory	—
SPAKPA390WJZZ	—	Wrapping Paper	—
SPAKPA391WJZZ	—	Wrapping Paper (Stand Side)	—
SPAKXA623WJZZ	—	Buffer Material	—
SSAKA0101GJZZ	—	Polyethylene Bag	—
TLABKA009WJZZ	—	No. Label	—

LC-32GA5U

SPAKCB649WJZZ	—	Packing Case	—
SPAKFA636WJZZ	—	Packing Case, for Accessory	—
SPAKPA376WJZZ	—	Wrapping Paper	—
SPAKPA377WJZZ	—	Wrapping Paper (Stand Side)	—
SPAKXA625WJZZ	—	Buffer Material	—
SSAKA0101GJZZ	—	Polyethylene Bag	—
TLABKA009WJZZ	—	No. Label	—

PACKING OF THE SET

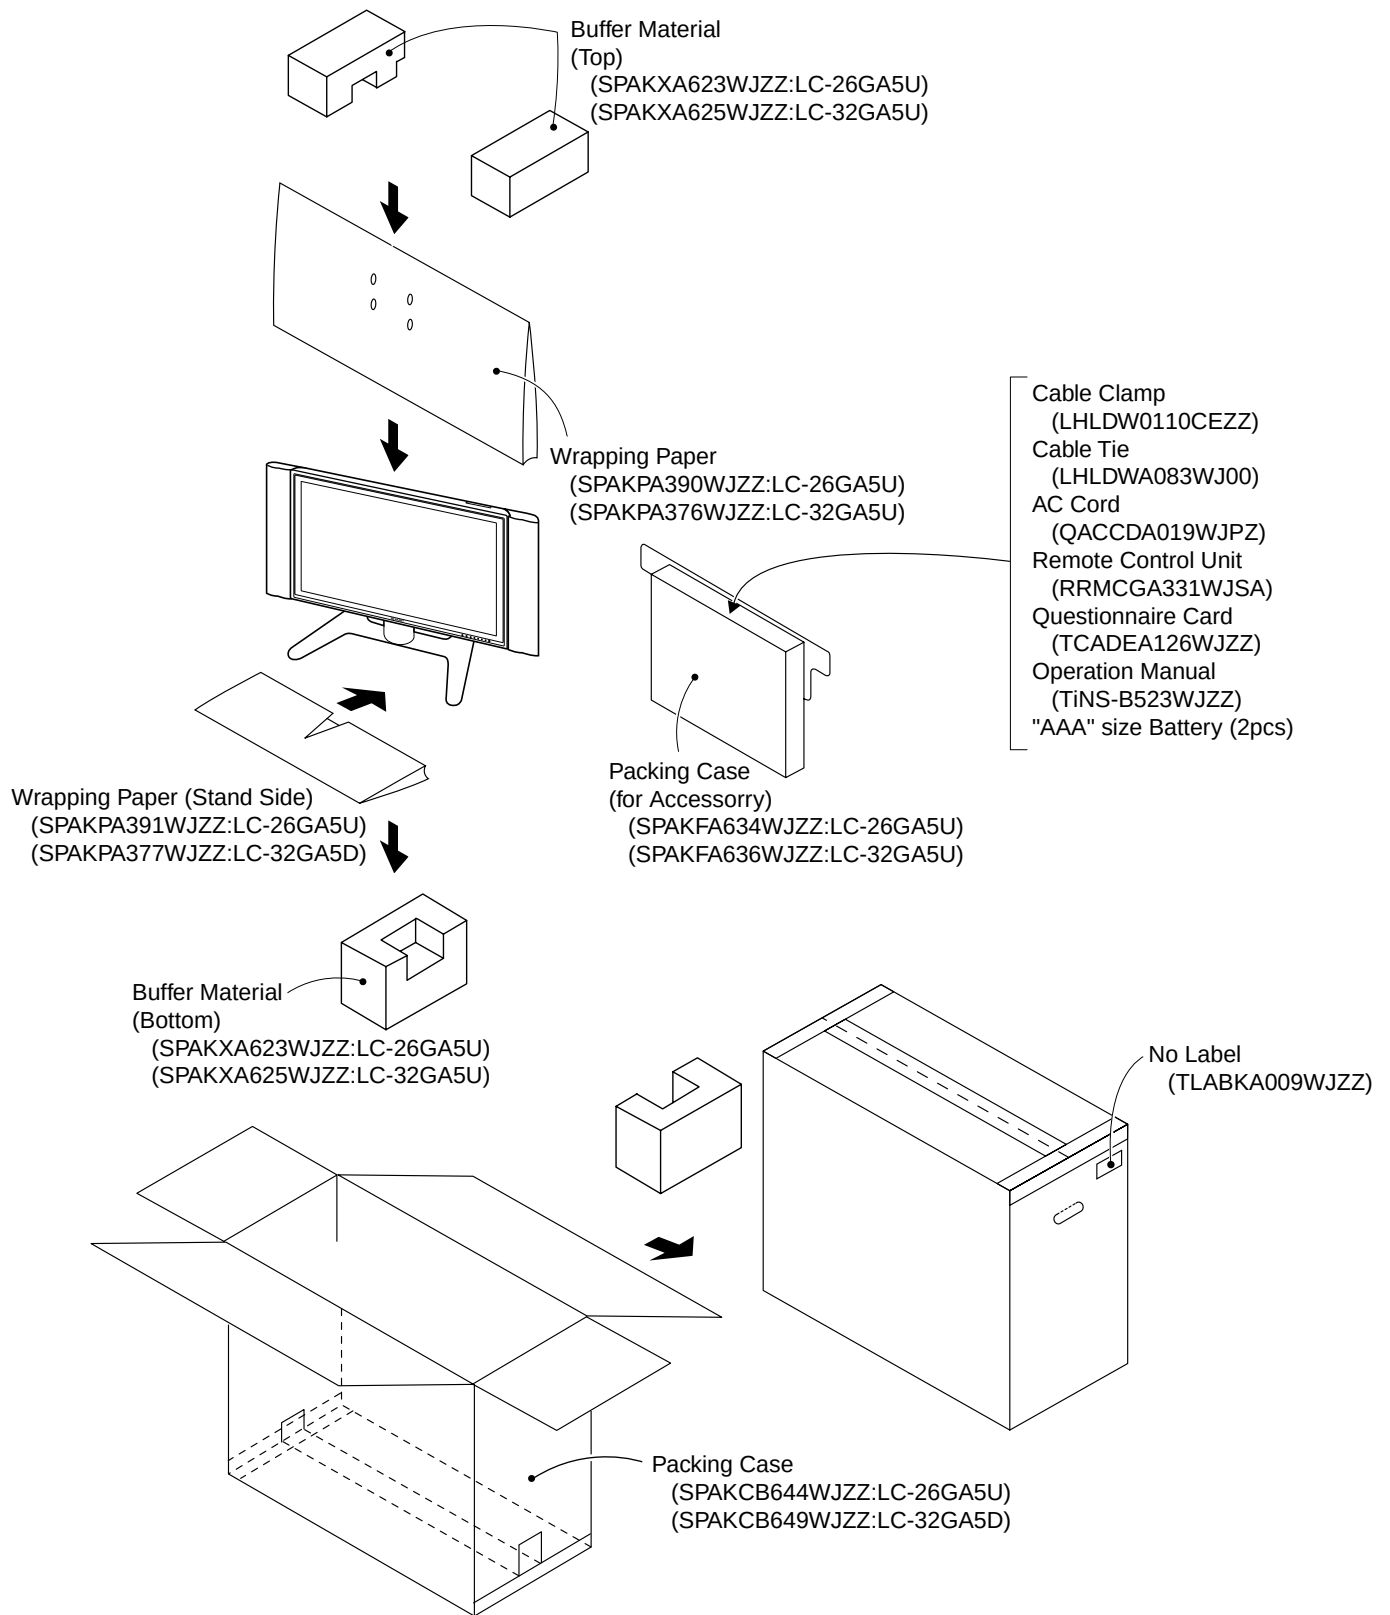

SHARP

COPYRIGHT © 2004 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.

TQ0000S

Nov. 2004 Printed in Japan

Design and Production Information

Design : Japan

Production : Japan

SY. KG

SHARP CORPORATION
AV Systems Group
Quality & Reliability Control Center
Yaita, Tochigi 329-2193, Japan